

Newbuilding contract "diana II"

Enclosure 2.3.1.5

ORIGINAL

CONTRACT

Pursuant to form adopted by the Swedish Shipbuilders' Association on the 30th January 1947
with amendments adopted on the 28th January 1964

This Contract is made between Partredetiet S. 592, Stockholm, Managing Owner
Rederiaktiebolaget SLITE, Stockholm/Sweden, Sturegatan 6

as Purchaser, on the one part and Shipyard Jos. L. Meyer, 2990 Papenburg (Ems) /
Germany, Hauptkanal rechts 2

as Builders, on the other part.
Whereby it is agreed as follows:

§ 1.

Subject to the conditions set out below the Builders will build for the Purchaser and will deliver at the Builders' yard at Papenburg (Ems) - Germany and will deliver The vessel ordered

a two compartment car- and passenger ferry at Emden/ Germany

(hereinafter called "the Vessel") having the Yard No. S. 592, substantially in accordance with the specifications and drawings numbered

5686/78 dated 1st June, 1978

relating to this Contract, and intended to be taken as part hereof.

The Yard number shall be considered solely as the means of identifying the Vessel and the parts intended for her and does not imply any priority in regard to other vessels accepted for earlier delivery by the Builders.

In the event of any discrepancy between this Agreement and the said specifications of drawings the provisions of this Agreement shall prevail and be adopted. In the event of any discrepancy between the specifications and the drawings the specifications shall prevail.

§ 2.

The dimensions of the Vessel shall be the following:

	Length overall: approx. 137,00 m	Leading dimensions and particulars
Length between perpendiculars	119,00	
in A-Deck (car deck)	24,20	
Breadth, moulded .. "waterline"	23,60	
Depth, moulded, to upper deck	13,00	
Depth, moulded, to second deck	7,65	
Number of passengers	1700	
Number of crew	150	
The deadweight capacity of the Vessel including fuel, stores, provisions, fresh water, passengers (if any), crew and spare parts beyond the requirements of the Classification Society, etc.,		
..... [1000] whereof min. 1600t for cargo (lorries on car de		
shall be about 2400..... tons (of kilos) on the international summer freeboard, ←		
corresponding to a mean draft in salt water (specific gravity 1.025) of about 5,45 m		

The propelling machinery of the Vessel shall consist of four main engines MAN,

type 8 L 40/45, each 4400 KW (6000 HP) at 600 rpm.

developing approx. I.H.P./B.H.P. (metric) at approx.

rpm.

The mean speed of the Vessel on trials with clear bottom when loaded to the said mean draft with a draft corresponding to 1500 tons deadweight]

and with her propelling machinery developing the said power is estimated to be 21

..... knots in calm weather and smooth sea on opposite runs over a measured mile.
The warranties of deadweight and speed shall be deemed to have been complied with if the Purchaser shall dispense with the trials or shall not for the purpose of the trials provide and ship on board the deadweight required to submerge the Vessel down to the said mean draft.

The fuel consumption of the propelling machinery, including all auxiliaries required for the propulsion of the Vessel, when developing approx. 24,000 HP I.H.P./B.H.P.

(metric) and when running on 1800 sec. Redw.I, 100° F

with an effective thermal value of at least 10,000 kcal per kilo, is estimated not to exceed 154 + 3% grams per I.H.P./B.H.P. (metric) per hour.

The Vessel with her accomodation, equipment and machinery shall be built in accordance with the rules and requirements for class

BUREAU VERITAS

I 3/3 + Deep Sea Finnish Ice Class 1 A

and rules/regulation corresponding to specification

The Builders shall supply at their cost Builders' certificate, certificate of the Classification society, and certificates of tonnage for international measurement and for

Unless otherwise agreed between the parties Svensk Varvstandard (Swedish Shipbuilding Standard) shall apply to all equipment, materials etc., for which such standard is published. If, during the period of building, alterations or additions are made to any rules, regulations or

enactments in force before 15th of May, 1978 and applicable to the Vessel the Builders shall inform the Purchaser thereof as soon as possible. The Purchaser must then decide whether and to what extent the alterations or additions which are not mandatory shall be incorporated in the Vessel. The amount of the additional expense or saving in cost arising from any alterations or additions shall be borne by or credited to the Purchaser, as the case may be.

§ 3.

If the estimated deadweight capacity mentioned in Clause 2 be not attained and if the deficiency exceeds $\frac{1}{3}$ % of the said deadweight capacity, the liability of the Builders shall be limited to the payment to the Purchaser, as liquidated damages, of 20.000 Skr for every 1 ton of deficiency beyond the said margin of $\frac{1}{3}$ %.

*Deficiency
in dead-
weight and
speed;
excessive
fuel
consumption*

On the other hand, the Purchaser shall pay the same amount to the Builders for every

1 tons, by which the actual deadweight exceeds the said estimated deadweight increased by 2 %.

Should the speed estimated in Clause 2 not be attained, the liability of the Builders shall be limited to the payment to the Purchaser, as liquidated damages, of the following percentages of the contract price stated in Clause 2:

For the first two-tenth ($\frac{2}{10}$) of a knot deficiency Nil.

For each successive complete tenth ($\frac{1}{10}$) of a knot deficiency up to one half ($\frac{1}{2}$) of a knot 0,2 %

For each complete tenth ($\frac{1}{10}$) of a knot deficiency exceeding one half ($\frac{1}{2}$) of a knot 0,4 %

Should the fuel consumption exceed the consumption estimated in Clause 2 by more than 5 %, the liability of the Builders shall be limited to the payment to the Purchaser, as liquidated

damages, for each full five (5) grams per I.H.P./B.H.P. (metric)-per-hour by which the fuel consumption is increased beyond the said margin of 5 %. The Builders guarantee the speed of the Vessel to be not less than 20 knots as determined under Clause 2. If the deadweight capacity of the Vessel determined in Clause 2 will be less than 2200 tons or the cargo capacity

including war risk and sabotage as
from launching until delivery of
the Vessel

8

§ 13.

Until delivery has been effected, the Builders shall keep the Vessel and all parts intended for Insurance use in her construction insured against the usual builder's risks, for an amount not less than the instalments paid on account by the Purchaser. If considered necessary by the Builders, or purchaser the Vessel shall also be insured against war risks, and the cost of such insurance shall be borne by the Purchaser.

Should the Vessel in the opinion of the Builders be damaged by fire or other accident, to a considerable extent, the Builders shall be entitled to cancel this Contract and shall thereupon refund to the Purchaser the instalments paid on account of the contract price.

plus interest.

§ 14.

This Contract shall be construed and the relations between the parties determined in accordance with Swedish law. Disputes shall be settled by arbitration at the venue of the place of building according to the Swedish law relating to arbitrations.

If the Builders so require the Purchaser shall lodge such security as is approved by the arbitrator(s) for costs and damages likely to arise from the arbitration proceedings. If the Purchaser does not meet this requirement, he shall be debarred from any further step in the proceeding.

§ 15.

This Contract cannot be assigned without the written consent of the Builders.

*Assignment
of
Contract*

This Contract with attached specifications, drawing and appendices has been drawn up and signed by or on behalf of the parties hereto in duplicate, one copy being retained by each party.

This contract is valid subject the approval of Sveriges Riksbank and subject Purchaser finalizing the negotiations with Bank regarding the financing of the Vessel on terms acceptable to Owner.

Stockholm, June 24, 1978
Signed in duplicate:

PURCHASER:

Particulier nr S. 592
Pobor 17/13 SLITE
M. L. Meyer

BUILDERS:

Jos. L. Meyer
J. L. Meyer

Memo concerning discussion at BV hamburg

Jos. L. Meyer, Papenburg-Ems

Schiffswerft, Maschinenfabrik, Dockbetrieb

S. 592

Besprechung Bureau Veritas Hamburg am 23. Juni 1978

Herr Schwenker Bureau Veritas
 Herr ~~Amann~~ *D. Sc. ura* Bureau Veritas
 Herr Kormann Bureau Veritas

Herr Wahnes Jos. L. Meyer
 Herr Mühlenkamp Jos. L. Meyer

siehe C-Jedr rechts

1. Das Kollisionsgeschott muß durch eine wasserdichte Rampe bis zum A-Deck weitergeführt werden. Die Lage der Rampe zum VL kann in der Schrägen gemittelt werden, Absprache mit BV und der schwedischen Sicherheitsbehörde.
2. Die Schmierölumlaufanks können ohne Kofferdämme zum Boden gebaut werden, wenn die Tanks durch Atsperrorgane voneinander getrennt werden können.
3. Der Eisgürtel in der Außenhaut muß geändert werden von 0,5 auf 0,6 m über LWL.
4. Bei Abnahme und Prüfung der Hängedecks durch die Klasse kann das Klassenzichen den Zusatz PFA erhalten. BV 11-43-5 S. 330.
5. Der Winkel von 73° zwischen den Wellenbockarmen ist i. C., die Klasse hat hier keine speziellen Vorschriften.
6. Die PKW-Rampe muß nur für die Wagenbelastung ausgelegt werden, Gurtungsteck-Zuschläge sind nicht erforderlich.
7. Nach Aufgabe der Hubschraubergräde kann die Belastung des Decks nach 6 - 24,4 festgelegt werden.
8. Das dickwandige Kabelrohr zum Bugstrahlruderraum kann bis zu 80 % des Querschnittes mit Kabeln beladen werden. Wegen der Leckstabilität muß auf den 1/5-Bereich der Abschottung geachtet werden.
9. Gegen eine Überlappte Verbindung der Jüngsdeckbalkon nach vorgelegter Skizze bestehen keine Bedenken.
10. Nach SOLAS Regel 26 II müssen die Fenster im Bereich der Back im B 15 - Ausführung sein. (Pietermann Hardglas BV, Postbus 30, IJmuiden, Holland)
11. Durchführung von Kunststoffrohren durch horizontale Schotte: Nach Rapport från Byggtorskeningen, Stockholm, bis zu einem gewissen Durchmesser keine Stahlmanschetten erforderlich (Kopie des Berichtes liegt im TBS vor).
12. BV übergab der Werft die Vorschriften für den Einbau von Lifstanlagen.

TBS-M6-Zw

23. Juni 1978

Note by H wahnes on 23.10.78

Enclosure 2.3.1.7

Urgent! Tagestext ①
23.10.78 Name: Kuhn Werkstatt, Sonn, Sta.
11 Uhr Kontrollen der Feuerwehr für:
Balkongeländer
3) K.S.S. Balkongeländer
3) Steckplatte
3) 30.10.78
Ran für Schrauben für: Sargill etc -
Werkstatt Rostock, Name: Dr. Kuhn, 1.10.
doch ohne Montag am Mittwoch um 10:00
November, ohne Flaschen und 100. Kette
Belieferung für neue Gefahrenkette
D.M. 65,- 200,-
1.11.1978 3295 - Rost auf der Kettensäge
Lösfern und einschneiden
D.M. 2.450,-
wie oben: Rost auf
Kette fach D.M. 15.000,-

Memo by H wahnes dated 20.11.78

b. C.B. Nygård

Tran Nygård

Tr. Kinn

Tr. Tidberg

Tr. L. Anderson

Ug

20.11.95

Tagebok ①

$$\begin{array}{r}
 1) \text{Returporto: } 4 \times 85 = 340 \\
 \quad 1 \times 60 = 60 \\
 \quad 1 \times 15 = 15 \\
 \hline
 = 415 \approx 30\%
 \end{array}$$

Tarif ~ 1400; bis auf 1400 aufzuteilen
bei Returporto

= Vordrag mit Rechnung

$$\begin{array}{r}
 - 720 \text{ Fahrtaxe} \\
 - 100 \text{ Beiblatt} \\
 - 820 \\
 - 410 \text{ Book} \\
 \hline
 - 410 \frac{44}{44} = 76/17
 \end{array}$$

Returporto = 4 Kästen, da 4 Modelle
pro Kasten

2) Bei Bestellung von 20 Kästen sollen
davon gelten, daß a) fallbar
b) Aufschwip oben!

3) Sjöfartsstyrelset Rotterdam: anfragt
"Sjöfartsstyrelset behöver minst
Bringsätt f. i Katalogen & för bilden för
antingen C Hantverksmässig, som är
brun (brun Mekanik),

5) Modellbaut: Uppskrädd, VÄRVA - LÖVÉ
Markisplan von "Dänit"

6) 140 - Stück Nach Anfrage von Tr. Kjellgaard
nach Brandsonder im Stockton Handelsamt


15/06 '85 16:44 FAX +49 4061 61288

MEYER WERFT TS

010

A. f. d. Golde, Wallenhorst, 2. Viel. - Betriebs
(N.S. 23.6.72)
B.V. Tannke, B-15 Solas Reg. Co. II
(N.S. 23.6.78 P. 12)

Tagesh. Wölfeus (1)

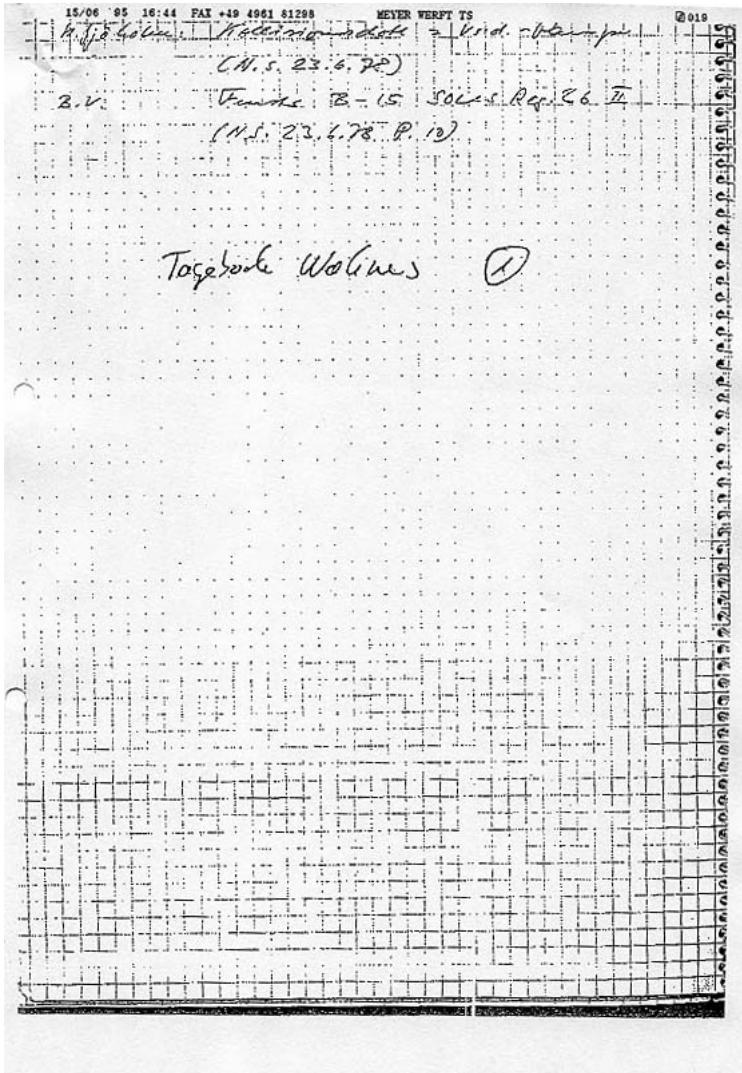

Pssc diana II issued 10.06.94



PASSENGER SHIP SAFETY CERTIFICATE

BILAGA 9
1(2)This certificate shall be supplemented by a Record of
Equipment (Form P).

Enclosure 2.3.1.9



SWEDEN

For an international voyage
 a short (Select as appropriate)

Issued under the provisions of the INTERNATIONAL CONVENTION FOR THE
SAFETY OF LIFE AT SEA 1974, in accordance with Assembly resolution A.718(17)
relating to the early implementation of the harmonized system of survey and
certification under the authority of the Government of Sweden
by the National Maritime Administration.

Particulars of ship

Name of ship : DIANA II

Call sign : S I A J

Port of registry: Slice

IMO Number : 7816874

Gross tonnage : 11537

Sea areas in which ship
is certified to operate
(reg.IV/2) : -

Date on which keel was laid or ship was at a similar stage of
construction or, where applicable, date on which work for a
conversion or an alteration or modification of a major character
was commenced: 1978

THIS IS TO CERTIFY:

- 1 That the ship has been surveyed in accordance with the requirements of regulation II/7 of the Convention.
- 2 That the survey showed that:
 - 1 the ship complied with the requirements of the Convention as regards:
 - .1 the structure, main and auxiliary machinery, boilers and other pressure vessels;
 - .2 the watertight subdivision arrangements and details;
 - .3 the following subdivision load lines:

Subdivision load lines assigned and marked on the ship's side amidships (regulation II-1/13)	Froebord	To apply when the spaces in which passengers are carried include the following alternative spaces
C.1	2012	
C.2		
C.3		

BILAGA 9
2(6)

- 2.2 the ship complied with the requirements of the Convention as regards structural fire protection, fire safety systems and appliances; and fire control plans;
 - 2.3 the life-saving appliances and the equipment of lifeboats, liferafts and rescue boats were provided in accordance with the requirements of the Convention;
 - 2.4 the ship was provided with a line-throwing appliance and radio installations used in life-saving appliances in accordance with the requirements of the Convention;
 - 2.5 the ship complied with the requirements of the Convention as regards radio installations;
 - 2.6 the functioning of the radio installations used in life-saving appliances complied with the requirements of the Convention;
 - 2.7 the ship complied with the requirements of the Convention as regards shipborne navigational equipment, means of embarkation for pilots and nautical publications;
 - 2.8 the ship was provided with lights, shapes, means of making sound signals and distress signals in accordance with the requirements of the Convention and the International Regulations for Preventing Collisions at Sea in force;
 - 2.9 in all other respects the ship complied with the relevant requirements of the Convention.
3. That an Exemption Certificate has been issued. (Select as appropriate.)
 has not

This certificate is
valid until : 1 February 1995

Issued Malmö at 10 June 1994
(Date of issue) (Place of issue of certificate)


Signature of authority official issuing the certificate
Åke Sjöblom



CW

Spec viking sally 11.09.79

13.9.79 (b)

A-1
SPECIFICATION
A-8
for a
A-12
abt. 15.000 BRT
2-5
CAR-PASSENGER FERRY
3-3

(in connection with general arrangement plan
5675/79 dated 5.9.1979)

Jos. L. Meyer, Papenburg-Ems
Schnellboot, Maschinenfabrik, Dockbetrieb

TABLE OF CONTENTS

1.	General	1-1
11.	MAIN DATA	1-3
111.	Dimensions, Volumes, Deadweight	1-3
1111.	Dimensions	1-3
1112.	Capacities	1-3
1113.	Tonnage	1-5
1114.	Deadweight and Draught	1-5
112.	Speed and Power, Model Tests	1-6
1121.	Speed and Hull Form	1-6
1124.	Model Test	1-6
113.	Trim and Stability	1-7
114.	Classification, Regulations, Noise Preventing	1-8
116.	Material and Workmanship	1-9
117.	Spares and Inventory, Owners' Delivery	1-10
12.	APPROVAL OF DRAWINGS, CALCULATIONS AND SUBCONTRACTORS	1-11
13.	CERTIFICATES, DELIVERY DRAWINGS, MODELS	1-12
133.	Certificates	1-12
134.	Delivery Drawings	1-13
14.	TESTS, TRIALS AND SUPERVISION	1-14
	Tests and Trials	1-14
	Sea Trials	1-14
	Dock Trials	1-15
	Inclining Experiment	1-16
	Inspection	1-16
15.	DOCKING	1-17
17.	DELIVERY, GUARANTEE	1-18
	Delivery	1-18
	Guarantee	1-18
2.	STEEL HULL AND SUPERSTRUCTURES	2-1
20.	GENERAL	2-1

Jos. L. Meyer, Papenburg-Ems

Schiffswerft, Maschinenfabrik, Dockbetrieb

21.	HULL	2-2
211.	After Ship	2-2
212.	Foreship	2-3
	Chain Lockets	2-3
	Chain Pipes	2-3
	Hawse Pipes	2-3
	Anchors Pockets	2-3
213.	Bottom Structures	2-4
	Double Bottom	2-4
	Tanks	2-4
214.	Bulkheads	2-5
215.	Decks	2-6
216.	Shell Plating and Framing	2-7
22.	SUPERSTRUCTURES	2-8
23.	ENGINE SEATINGS	2-9
231.	Main Engine Seatings	2-9
232.	Auxiliary Engine Seatings	2-10
233.	Deck Machinery Seatings	2-11
3.	HULL AND DECK FITTINGS AND INVENTORY	3-1
31.	HULL EQUIPMENT	3-1
312.	Ports, Ramps	3-1
3121.	Side Ports	3-1
3122.	Pilot and Passenger Doors	3-1
3123.	Bow Visor and Ramp	3-2
	Outer Bow Visor	3-2
	Dow Ramps	3-3
	Partial Collision Door	3-3
3124.	Stern Ramps and Doors	3-3
3127.	Hydraulic System	3-4
313.	Access Hatchets, Manholes, Drain Plugs	3-5
3132.	Staircases	3-5
3133.	Access Hatch Covers	3-5
3134.	Manholes	3-5
3135.	Jaloussies at Air Inlet Openings	3-5
3136.	Openings for Inspection and Service	3-5
3137.	Drain Plugs	3-6

Jos. L. Meyer, Papenburg-Ems

Schiffswerft, Maschinenfabrik, Dockbetrieb

314.	Steel and Aluminium Doors	3-7
3142.	Steel doors with Devices for Tight Closing	3-7
	General	3-7
	Watertight Doors	3-7
	Splashtight Door	3-7
3143.	Steel doors without Devices for Tight Closing	3-8
3145.	Aluminium Doors	3-8
315.	Watertight Sliding Doors	3-9
3151.	Sliding doors	3-9
3152.	Operating and Controlling Devices	3-9
316.	Windows and Sidelights	3-10
317.	Stairways and Ladders	3-11
3171.	Steel Stairs	3-11
	Exposed Stairs	3-11
	Stairs in Accommodation	3-11
3175.	Ladders and Separate Steps	3-11
318.	Barriers, Grabrails, Etc.	3-12
3181.	Barriers	3-12
	Barriers on Exposed Decks	3-12
3184.	Grabrails, Painting Rails and Detachable Guard Rails	3-12
3185.	Guardrails for Cat Ramps and Ramp Openings	3-12
319.	Bilge Keels and Small Hull Fittings	3-13
3192.	Bilge Keels	3-13
3193.	Penders	3-13
3196.	Other Fittings	3-13
32.	ANCHORING EQUIPMENT	3-14
321.	Anchoring Equipment in Foreship	3-14
3211.	Windlass	3-14
	Capacity	3-14
3212.	Anchors	3-14
3213.	Chains	3-14
3214.	Fastening of Anchors and Chains	3-15
3215.	Protecting Cover	3-15
33.	MOORING ARRANGEMENTS	3-16
331.	Bollards, Fairleads, Mooring Pipes and Wires	3-16
	Guide Rollers	3-16
	Polypropylen Ropes	3-16
	Wire Reels	3-16

Jos. L. Meyer, Papenburg-Ems
 Schifffahrt, Maschinenfabrik, Dockbetrieb

332.	Mooring Winches, Special Fairleads	3-17
3321.	Mooring Winches	3-17
3322.	Special Fairleads	3-17
34.	STEERING GEAR	3-18
341.	Rudders	3-18
3411.	Rudder Blade	3-18
3413.	Rudder Stock	3-18
3414.	Rudder Carrier Bearing	3-18
342.	Steering Gear	3-19
343.	Bow Propeller Control	3-20
3-21	LOADING ARRANGEMENT, RIGGING	
353.	Signal Mast, Flag Staffs etc.	3-21
36.	BOAT EQUIPMENT, GANGWAY LADDERS, DAVITS	3-22
361.	Boat Equipment and Davits	3-22
3611.	Lifeboats	3-22
3612.	Lifeboat Davits	3-22
362.	Rafts	3-24
365.	Davits, Store Crane etc.	3-25
37.	NAVIGATIONAL EQUIPMENT	3-26
371.	Electrical Navigational Equipment	3-26
3711.	Gyro Compass	3-26
3712.	Autopilot	3-26
3713.	Radar	3-26
3714.	Echo Sounder	3-26
3715.	Wind Indicator	3-27
3716.	Direction Finder	3-27
3717.	Decca Navigator	3-27
3718.	Draft Measuring	3-27
372.	Mechanical Navigation Equipment	3-27 a
3721.	Magnetic Compasses	3-27 a
3722.	Patent log	3-27 a
373.	Signalling Equipment	3-28
3731.	Navigation Lamps	3-28
3732.	Morse Lamps	3-28
3733.	Searchlights	3-28
3734.	Sirens	3-29
3735.	Ship's Bells	3-29
374.	Special Wireless Equipment	3-30
3743.	Internal TV-system	3-30

Jos. L. Meyer, Papenburg-Ems
 Schifffahrt, Maschinenfabrik, Dockbetrieb

375.	Radio Equipment	3-31
376.	Internal Communication System	3-32
3761.	Speaking Tubes	3-32
3762.	Sound Powered Telephones	3-32
3763.	Talk-back loudspeaker	3-32
3764.	Local Telephone System. Shore Connection	3-33
3767.	Calling System	3-33
377.	Central Aerial, Time Recorder	3-34
3771.	Loudspeakers	3-34
3772.	General Aerial System for TV and Radio Sets	3-34
3773.	Time Recorder System	3-35
378.	Fire Alarm System	3-36
3781.	Automatic Fire Alarm	3-36
3782.	Gas Alarm	3-36
379.	Navigating Console	3-37
38.	SPECIAL ARRANGEMENT	3-38
382.	Car Deck and Ramps	3-38
	Hoistable Car Platforms	3-38
383.	Lashing Pots and Fittings	3-40
	Lashing Pots	3-40
	Trailer Securing Units	3-40
385.	Lifts	3-41
39.	HULL AND DECK INVENTORY	3-42
391.	Navigational and Signalling Inventories	3-42
3910.	General	3-42
3911.	Navigational Instruments	3-42
3912.	Signalling Inventory	3-42
392.	Life Saving Appliances	3-43
394.	Fire Extinguishing Inventory	3-44
395.	Deck Inventory	3-45
	Tarpaulins	3-46
4.	INSULATION AND LINING, DECK COMPOSITION ACCOMMODATION, PAINTING	4-1
43.	DECK COMPOSITION AT WEATHER DECKS, DECK STORES	4-1
431.	Composition Covered Weather Decks	4-1

Jos. L. Meyer, Papenburg-Ems
 Schiffsverf., Maschinenfabrik, Dockbetriebe

432.	Various Store Rooms	4-2
433.	Gratings on Weather Decks	4-3
44.	INSULATION, CEILING AND SIDE LINING, DECK COMPOSITION IN ACCOMMODATIONS	4-4
442.	Insulation and Lining, Divisional Bulkheads	4-5
	Lining, Divisional Bulkheads	4-6
443.	Lining of Ceiling	4-7
444.	Deck Composition and Tiling in Accommodation	4-8
	Floating Floor	4-8
445.	Provision Stores	4-9
	Dry Provisions	4-9
	Cold Provisions	4-9
446.	Insulation, Lining and Fittings in Saunas	4-10
	Insulation and Lining	4-10
	Cementing and Tiling	4-10
	Fittings	4-10
	Shower Rooms	4-10
	Dressing Rooms	4-10
447.	Doors in Accommodation	4-11
448.	Stairs in the Accommodation	4-13
45.	ACCOMMODATION	4-14
	General	4-14
	Furniture, Generally	4-14
451.	Crew Accommodation	4-15
	Officers' mess and dayroom	4-15
	Crews' mess and dayroom	4-15
	Officers' and Crews' Cabins	4-15
	Offices	4-16
4513.	Wheelhouse and Chart Room	4-16
	Radio station	4-17
452.	Passenger Cabins	4-18
	Couchettes	4-18
	Hospital	4-18
453.	Public Spaces	4-19
	Halls and Staircases	4-19
	Dining Room	4-19
	A la Carte Restaurant	4-19
	Cafeteria/Grill Room	4-19
	Dancing Saloon	4-19

Jos. L. Meyer, Papenburg-Ems
 Schiffsverf., Maschinenfabrik, Dockbetriebe

	Shops-Supermarket	4-19 a
	Milk Shake Room	4-19 b
	Conference Room	4-19 c
	Night Club	4-19 a
	Air Seat Room	4-20
	Mother and Child Room	4-20
	Sauna Department	4-20
454.	Galley and Pantries	4-21
455.	Public Toilet Rooms	4-22
	Swimming Pool Compartment	4-22
456.	Equipment in the Accommodation	4-23
4564.	Laundry	4-28
47.	PAINTING	4-29
470.	General	4-29
471.	Rust Removal, Corrosion Protection	4-31
4711.	Shot blasting	4-31
4716.	Hot Galvanizing	4-31
472.	Exterior Shell Plating	4-32
473.	Weather Decks, Outside of Deckhouse and Deck Equipment	4-33
474.	Hull Interior	4-34
	Tanks	4-34
	Cargo Spaces	4-34
	Hull and Deckhouse Structures	4-34
475.	Painting of Living and Service Rooms and Furnishings	4-36
476.	Painting in Engine Room and Workshops	4-37
477.	Draught Marks, Ship's Name etc. Name and Port of Registry	4-38
	Owners' Mark	4-38
	Freeboard, Tonnage, Draught and Tank Marks and Paint Borders	4-38
	Marking on Rooms etc.	4-39
490.	Corrosion Protectors in External Hull	4-40
5.	THE HULL PIPING SYSTEM, VENTILATION, FIRE EXTINGUISHING EQUIPMENT; REFRIGE- RATING MACHINERY	5-1

Jos. L. Meyer, Papenburg-Ems	
Schiffswerft, Maschinenfabrik, Dockbetrieb	

51.	SCUPPER	5-1
52.	SANITARY WATER SYSTEMS	5-2
5211.	Hydrophones	5-2
5212.	Hydr. Pumps	5-2
5214.	Hot Water Circ. Pumps	5-2
5216.	Water Heaters	5-2
5217.	Sanitary Equipment	5-3
5217.	Equipment for swimming pool	5-4
522.	The Sanitary Water Pipe System	5-5
523.	Sewage System	5-6
5231.	Drain Pipes	5-6
5233.	Sewage Water Treatment Plant	5-6
5234.	Black Water Installation in Sewage Treatment Room	5-6
5235.	Discharge to Sea	5-7
5236.	Gray Water	5-7 a
524.	Heating	5-8
5241.	Heating of Car Decks	5-8
5242.	Heating of Steering Gear Room, Stores, etc.	5-8
53.	FIRE PROTECTION	5-9
531.	Fire and Deck Wash Systems	5-10
5311.	Deck Paint Wash Connections	5-10
5322.	Sprinkler System	5-10
5331.	CO ₂ Fire Extinguishing System	5-10
54.	VENTILATION, AIR CONDITIONING	5-12
541.	Generally	5-12
541.	Ventilation of Car Deck	5-13
542.	Ventilation of Bow Propeller Room, Stores, etc.	5-14
543.	Ventilation of Accommodation	5-15
5436.	Insulation of Air Ducts	5-17
5511.	Provision Cooling Plant	5-18
56.	SPECIAL SYSTEMS	5-19
561.	Special Handling Systems	5-19
5612.	Handling of Waste	5-19
5612.	Handling of dry refuse	5-19
5612.	Waste Paper Press	5-19
5612.	Handling of Wet Garbage	5-19
5612.	Handling of Waste Water	5-19
5615.	Handling of Dirty Linen	5-19

Jos. L. Meyer, Papenburg-Ems	
Schiffswerft, Maschinenfabrik, Dockbetrieb	

1. GENERAL

General Regulations

The vessel shall be built in accordance with this specification and the General Arrangement drawings, equipped to comply with the specific regulations.

Inventories shall be delivered according to the included lists. Should any object be mentioned in more than one place, however it is only to be delivered once. When two or more materials or methods of manufacture are mentioned, the Builders have the right to choose between these.

The design of subcontractors' equipment and recommendations for installation of the same equipment refer to their standard on the date of this specification.

If, as a result of increased experience or general technical development, other designs, materials or methods of manufacture than those stated in this specification are found equivalent but more practical, the Builders reserve the right to adopt these new designs etc. Such alterations, however, are always to be submitted to the Owners' surveyor for approval before being carried out.

The shipyard alone is responsible for the construction and quality of work of the ship. The fact that drawings or other documents have resulted etc. have been shown to the Owners or been approved by the Owners or an authority or that modifications have been carried out according to Owners' requirements does not relieve the shipyard from the above mentioned responsibility.

If drawings are submitted and any discrepancy should exist between this specification and the drawings, the specification shall prevail.

Details and equipment necessary for a ship of this type but not stated in this specification to be done according to yard's praxis approved by the Owners'.

General Description

The ship to be built in every respect as a modern car/pasenger ferry, designed for short international voyage.

Jos. L. Meyer, Papenburg-Ems
Schiffswerft, Maschinenfabrik, Dockanlagen

1-1

1. GENERAL**General Regulations**

The vessel shall be built in accordance with this specification and the General Arrangement drawings, equipped to comply with the specific regulations.

Inventories shall be delivered according to the included lists. Should any object be mentioned in more than one place, however it is only to be delivered once. When two or more materials or methods of manufacture are mentioned, the Builders have the right to choose between these.

The design of subcontractors' equipment and recommendations for installation of the same equipment refer to their standard on the date of this specification.

If, as a result of increased experience or general technical development, other designs, materials or methods of manufacture than those stated in this specification are found equivalent but more practical, the Builders reserve the right to adopt these new designs etc. Such alterations, however, are always to be submitted to the Owners' surveyor for approval before being carried out.

The shipyard alone is responsible for the construction and quality of work of the ship. The fact that drawings or other documents, test results, etc. have been shown to the Owners or been approved by the Owners or an authority or that modifications have been carried out according to Owners' requirements does not relieve the shipyard from the above mentioned responsibility.

If drawings are submitted and any discrepancy should exist between this specification and the drawings, the specification shall prevail.

Details and equipment necessary for a ship of this type but not stated in this specification to be done according to yard's praxis approved by the Owners'.

General Description

The ship to be built in every respect as a modern car/passenger ferry, designed for short international voyage.

Jos. L. Meyer, Papenburg-Ems
Schiffswerft, Maschinenfabrik, Dockanlagen

1-8

14. CLASSIFICATION, REGULATIONS, NOISE PREVENTING

The vessel with her accommodation, equipment and machinery shall be built under special survey to Bureau Veritas class, I 3/3 E + Car and Passenger ferry Deep sea Finnish Ice class I A +(AUT) = E 0

The vessel with equipment shall comply with the following rules and regulations:

- The Finnish Board of Shipping
- International Conference on Safety of Life at Sea 1974
- International Load Line Convention 1966 and amendments 1971 - 1975
- Convention for Tonnage Measurement of Ships, Oslo 1947
- Pollution Prevention 1973
- International Regulations for Preventing Collision at Sea 1972
- Finnish Authorities' recommendations for Safety Ship Labour 77 : 33
- US Regulations regarding sanitation (fresh water tank arrangement excluded) (as reasonable applicable)
- Convention on the Protection of the Marine Environment of the Baltic Sea Area 1974/232
- IMCO resolution A 325 (ix) 1975 concerning regulations for machinery and electric installations in passenger vessels and cargo ships
- US requirements for passenger vessels' safety to be followed as reasonable applicable
- // - The Finnish Board of Shipping and Navigation Rules and Recommendations of Noise Level Criterium

Jos. L Meyer, Papenburg-Ems

Schiffswerft, Maschinenfabrik, Dockbetrieb

1-12

13. CERTIFICATES, DELIVERY DRAWINGS, MODELS

133. CERTIFICATES

All necessary certificates to be delivered with the ship including:

- Certificate from the Classification Society for Hull and Machinery
- Tonnage Certificates
- Hull Number Certificate
- Safety Construction Certificate
- Safety Equipment Certificate
- Safety Radiotelegraphy Certificate
- Register of Lifting Gear (attestation by the classification society)
- Builder's Certificate
- Deratting Certificate

Certificates for anchors, chain cables, davits, navigation lights, compasses etc. will be delivered.

Certificates and costs for approval of plans by the Authorities concerned shall be paid for by the Builders.

Jos. L Meyer, Papenburg-Ems


Schiffswerft, Maschinenfabrik, Dockbetrieb

2-5

214. BULKHEADS

- | Steel bulkheads below car deck to fulfil the two-compartment stability and flooding requirements. Steel bulkheads on upper decks for main fire zones, main stair casings, around galley departments, store rooms etc. of 4 mm corrugated plates.

Part of GA plan dated 05.09.79

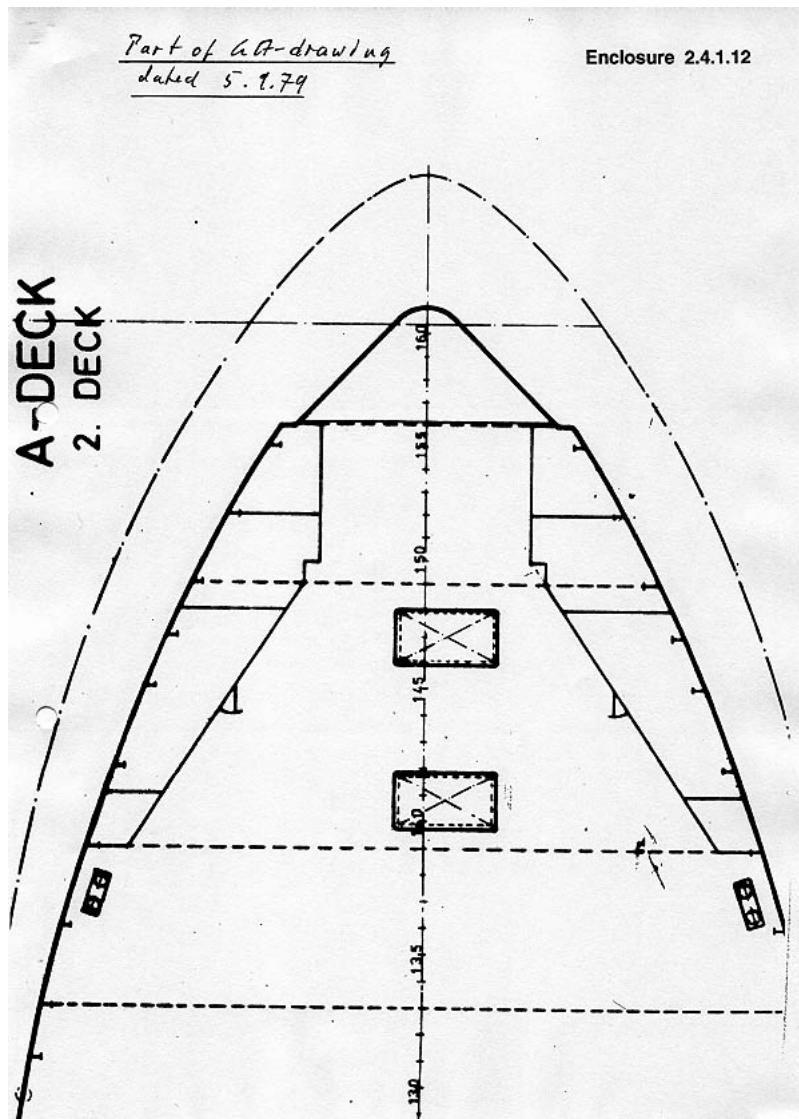

Newbuilding contract viking sally 11.09.79

CONTRACT

Pursuant to form adopted by the Swedish Shipbuilders' Association on the 30th January 1947
with amendments adopted on the 28th January 1964

This Contract is made between Rederiaktiebolaget Sally, Strandgatan 7,
22100 Mariehamn, Finland

as Purchaser, on the one part and Shipyard Jos. L. Meyer, W-Germany,
2990 Papenburg (EMS), Hauptkanal Rechts 2

as Builders, on the other part.
Whereby it is agreed as follows:

§ 1.

Subject to the conditions set out below the Builders will build for the Purchaser ~~and will deliver at the Builders' yard at Papenburg (EMS)-Germany and will deliver~~ ^{The vessel} ~~ordered~~

~~two compartment car- and passenger ferry at Emden/Germany~~
(hereinafter called "the Vessel") having the Yard No. 5 : "590" substantially in accordance with the specifications and drawings numbered

5675/79 dated 5th September, 1979

relating to this Contract, and intended to be taken as part hereof.
The Yard number shall be considered solely as the means of identifying the Vessel and the parts intended for her and does not imply any priority in regard to other vessels accepted for earlier delivery by the Builders.

In the event of any discrepancy between this Agreement and the said specifications or drawings the provisions of this Agreement shall prevail and be adopted. In the event of any discrepancy between the specifications and the drawings the specifications shall prevail.

[Handwritten signature]

§ 2.

The dimensions of the Vessel shall be the following:

Length overall:	approx.	155,40 m
Length between perpendiculars		137,40 m
max		24,60 m
Breadth, moulded		23,60 m
Depth, moulded, to upper deck		13,40 m

*Leading
dimensions
and
particulars*

Depth, moulded, to second deck	7,65 m
Number of passengers	2.000
Number of crew	188

The deadweight capacity of the Vessel including fuel, stores, provisions, fresh water, passengers (if any), crew and spare parts beyond the requirements of the Classification Society, etc.,

shall be about 2.800 tons (of 1.000 kilos) on the international summer freeboard, corresponding to a mean draft in salt water (specific gravity 1.025) of about 5.55 m

The propelling machinery of the Vessel shall consist of four main engines of M.A.H., type 8L 40/45, each 4400 kw (5.984 HP) at 600 rpm

developing approx. I.H.P./D.H.P. (metric) at approx.
1.800

The mean speed of the Vessel on trials with clean bottom when loaded to the said mean draft with a draft corresponding to 1.460 tons deadweight and with her propelling machinery developing ~~2.800~~ ^{2.800} kw/h is estimated to be 21,2 ^{20%} of the MCR at 180,5 rpm

..... knots in calm weather and smooth sea on opposite runs over a measured mile. The warranties of deadweight and speed shall be deemed to have been complied with if the Purchaser shall dispense with the trials or shall not for the purpose of the trials provide and ship on board the deadweight required to submerge the Vessel down to the said mean draft.

The fuel consumption of the propelling machinery, including all auxiliaries required for the propulsion of the Vessel, when developing approx. 17.600 kw I.H.P./D.H.P.

(metric) and when running on 1.500 sec redwood I, 100°F

with an effective thermal value of at least 19.000 kcal per kilo, is estimated not to exceed 209 ⁺ 3 % grams per 1.500 sec redwood I, 100°F (metric) per hour.

The Vessel with her accommodation, equipment and machinery shall be built in accordance with the rules and requirements for class

Bureau Veritas

Finnish/

I 3/3 E + car- and passenger ferry deep sea, ice class IA

+ (Aut) and rules/regulations corresponding to specification

The Builders shall supply at their cost Builders' certificate, certificate of the Classification society, and certificates of tonnage for international measurement and for other certificates provided for in the specification

Scandinavian standard for car/passenger ferries
Unless otherwise agreed between the parties Svenska Verkstadsstandard (Swedish Shipbuilding Standard) shall apply to all equipment, materials etc., for which such standard is published.

If, during the period of building, alterations or additions are made to any rules, regulations or enactments in force before 11th September 1979 as far as the classification society is concerned and 1st April 1979 in all other respects, and applicable to the Vessel the Builders shall inform the Purchaser thereof as soon as possible. The Purchaser must then decide whether and to what extent the alterations or additions which are not mandatory shall be incorporated in the Vessel. The amount of the additional expense or saving in cost arising from any alterations or additions shall be borne by or credited to the Purchaser, as the case may be.

§ 3.

If the estimated deadweight capacity mentioned in Clause 2 be not attained and if the deficiency exceeds $\frac{2}{35}\%$ of the said deadweight capacity, the liability of the Builders shall be limited to the payment to the Purchaser, as liquidated damages, of DEM 15,000,- for every $\frac{2}{35}\%$ tons of deficiency beyond the said margin of $\frac{2}{35}\%$.

On the other hand, the Purchaser shall pay the same amount to the Builders for every $\frac{2}{35}\%$ tons, by which the actual deadweight exceeds the said estimated deadweight increased by $\frac{2}{35}\% 4\%$.

Should the speed estimated in Clause 2 not be attained, the liability of the Builders shall be limited to the payment to the Purchaser, as liquidated damages, of the following percentages of the contract price stated in Clause 10:

For the first two tenths (2/10) of a knot deficiency	Nil.
For each successive complete tenth (1/10) of a knot deficiency up to one half (1/2) of a knot	0,2 %
For each complete tenth (1/10) of a knot deficiency exceeding one half (1/2) of a knot	0,4 %

Should the fuel consumption exceed the consumption estimated in Clause 4 by more than 5%, the liability of the Builders shall be limited to the payment to the Purchaser, as liquidated

damages, for each full five (5) grams per I.H.P./B.H.P. (net) per hour by which the fuel consumption is increased beyond the said margin of 5%.

The Builders guarantee that the deadweight capacity of the vessel determined in clause 2 shall not be less than 2500 tons, whereof no less than 1500 t. for cargo (lorries) on car deck and that the speed determined as stated in clause 2 shall not be less than 20,1 knots.

Builders cannot fulfill one or both of these two guarantees the Purchaser
the right and option to refuse to take delivery of the vessel and to cancel
contract with an obligation for the Builders to refund immediately to the Purchaser 4
instalments paid on account of the contract price plus interest.
§ 4

When the Builders have notified the Purchaser that the Vessel is ready for delivery, a trial *Trial trip*
trip shall take place off EMDEN to ascertain whether the Vessel conforms with the terms of the contract. The trial trip, which
shall be undertaken in the presence of representatives of the Purchaser, shall be organized by the
Builders and shall be at their expense. The Purchaser shall bear the expenses of the trip.
The Builders at their discretion may extend the trial trip or hold further trial trips, or within 6 hours after its completion.
If, during the trial trip, the Purchaser makes no substantial complaint to the effect that the
Vessel does not comply with the terms of the Contract, the Vessel shall be accepted by the
Purchaser, who, if so required by the Builders, shall declare such acceptance in writing.
If, however, faults or defects arise during the trial trip, the Builders shall be entitled to re-
medy these and to ascertain by further trials whether the Vessel complies with the terms of
this Contract.
If, in order to ascertain whether the Vessel complies with the terms of the contract, the Pur-
chaser requires the Vessel to be loaded, the loading and discharge of the cargo shall be carried
out by the Purchaser at his own risk and expense and the Builders shall not be held in any way
responsible for delay or damage arising as a result of the loading and discharge.

§ 5.

The Purchaser shall be entitled, subject to the approval of the Classification Society and to
government regulation, to require alterations or additions to be made to the Vessel, provided *additional*
work
such alterations or additions do not materially affect the general intention of the parties as
embodied in the specifications and drawings relating to this Agreement and are notified in
writing to the Builders at an appropriate time and a fair price adjustment shall have been
agreed before the work thereon be put in hand.

If such alterations or additions cause delay the time of delivery of the Vessel shall be exten-
ded by the period of delay.
x) and the Builders notify the Purchaser that such delay will occur
§ 6.

Should any alterations or additions mentioned in Clauses 2 or 5 cause an increase in the weight *Increase in*
of the Vessel *and* the Builders notify the Purchaser that such increase will *result*
in *loss*
by the actual increase in the weight.
accordingly.

§ 7.

The Purchaser or his representatives shall be entitled to supervise the construction of the *Purchaser's*
representatives
Vessel *according to the specification*.
Builders shall be entitled to make alterations and additions to the Vessel during working hours
but without causing unnecessary delay. Builders shall be entitled to make alterations to the Vessel during working
hours, and the Builders shall have due regard to any proper complaint or observations made
by the Purchaser or his representatives concerning materials and workmanship. If the Builders
so desire, the Purchaser or his representatives shall make such complaints or observations in
writing. The Builders will in reasonable time notify the Purchaser or his
representatives of dock trials and other such trials and tests.

The delivery date for the Vessel shall be

Completion
and delivery

30th June 1980.

Should delivery be delayed beyond the above mentioned date, the Builders shall only be
liable to pay to the Purchaser *xx* liquidated damages according to the period of delay
a compensation at the rate of DEM 20,000,- per day as from 1st July 1980.
On the other hand, the Purchaser shall pay the Builders a compensation of
DEM 5,000,- for every day the vessel is delivered earlier than 30th June 1980.

Should the Vessel not be delivered before 1st November 1980, the Purchaser has the option of cancelling this contract against being paid back the instalments paid on account of the contract price plus interest and also compensation due for payment as mentioned above.

The instalments already paid by the Purchaser in cash or by bills, at the highest rate charged from time to time by the Swedish private commercial banks on loans secured by mortgages on ships.

The Builders shall not be liable for damages or otherwise however if the delay is due to force majeure such as war or warlike operations, strike, lockout or other labour conflicts, whether approved or supported by trade unions or not, shorter working hours imposed on the Builders, shortage of manpower or materials, late delivery of materials or goods, defective parts or services, EXCEPTIONS (15 days) whatever materials or goods supplied by sub-contractors, fire, accident, act of God, strikes, lockouts, whether or any other circumstances outside the control of the Builders and whether affecting the Vessel or any other commitments of the Builders. And the time for delivery shall be extended by the number of working days lost to the Builders by reason of any of the above mentioned occurrences, even if the cause of the delay arises after the date of delivery stated in this Contract.

If, during the period of building, the Vessel sustains damage which has been repaired to the satisfaction of the Classification Society and/or the government authorities concerned, the Purchaser is not thereby entitled to refuse delivery of the Vessel or to claim compensation.

If the Vessel is put into service by the Purchaser before it is entirely ready for delivery, the Purchaser's right to claim compensation for any delay in the delivery shall cease from the day the Vessel is put into such service.

If the Vessel is ready for delivery before the date mentioned in the first paragraph of this Clause and the Builders give to the Purchaser at least two weeks notice thereof the Purchaser

gladly shall take delivery as soon as it has been ascertained that the Vessel has been built in accordance with the terms of the Contract. If such events occur, which in the Builders' judgement, may cause a delay, the Builders shall within two weeks notify the Purchaser of such events and, if possible, the estimated duration of the delay. If such written notice is not given within the stipulated two weeks, force majeure cannot be claimed for the period preceding such notice.

(a) If the Vessel has been delivered to the Purchaser or the Purchaser has, at his request, taken over the Vessel, the liability of the Builders shall cease, except that the Builders shall

remedy at their own yard, free of charge and as speedily as possible any defect detailed in writing by the Purchaser to the Builders which may have developed in the propelling or auxiliary machinery during the twelve months from the date the Vessel was delivered to or taken over by the Purchaser, provided such defect is due to inferior workmanship or latent defects in material or any period and is not due to overloading, incorrect fuel or lubrication, wear and tear, neglect, carelessness or may be handling, external causes, accident or the like, or is due to putting the Vessel into service before it was entirely ready for delivery.

contractor If the defect cannot be conveniently remedied at the Builders' yard, and if no other agreement can be arrived at between the parties, the Builders shall only be bound to pay in full and final settlement of their liability under this Clause to the Purchaser, such a sum as it would have cost the Builders had they done the work at their yard.

(b) During the guarantee period the Builders shall have the right to appoint a marine engineer, or mechanic fully conversant with the construction and running of the machinery as guarantee engineer, and the person so appointed shall receive from the Purchaser the customary salary and other remuneration due to a chief engineer on board a Swedish vessel of the same size, together, if so required, with a free passage and maintenance home as well as salary for the journey home. The Builders may accept the Purchaser's engineer as guarantee

The Builders' responsibility for the propelling and auxiliary machinery during the guarantee period shall cease if the guarantee engineer is dismissed without the Builders' approval. The Builders shall not be liable for any faults or omissions on the part of the guarantee engineer or on the part of any other member of the engineroom staff during the guarantee period.

(c) The Builders shall not in any circumstance be liable for loss of earnings or profits or for any other loss or damage, whether direct or indirect, or for accidents or the consequences thereof which may arise after the delivery of the Vessel nor shall their liability extend further or otherwise than in the first paragraph of this Clause provided.

(c) The Builders shall, upon request, supply the Purchaser with copies of the relevant guarantee clauses regarding important goods installed in the Vessel.

The same shall apply to late delivery caused by late delivery of substantial parts or services by sub-contractors providing the reason for late delivery would constitute force majeure for the Builders.

A

§ 10.

The Purchaser undertakes to pay to the Builders as follows:

	In Cash'	By bills of exchange	<i>Payerat</i>
On signing of this Contract	10 %	-	
the 15th October 1979	-	15 %	
On receipt of the bulk of rolled steel material	-	15 %	
the 15th December 1979	-	15 %	
On laying of the keel or when construction on the berth commences	10 %	-	
On launching	10 %	10 %	
On delivery	30 %	40 %	
On delivery to be covered by way of the loan	30 %	40 %	
Total	60 %	40 %	

The Builders shall inform the Purchaser at least fourteen days in advance of the date on which each of the foregoing instalments is due for payment.

The Purchaser undertakes to hand over to the Builders at the signing of the contract the following securities in addition to the first instalment:

The total fixed price for the Vessel amounts to eightytwomillionsevenhundred-andfiftythousand (DEM 82.750.000,-) German marks. The Bills of exchange and additional instalment of 30 %, equalling total of 70 % of the contract price will be covered by a loan.

The Purchaser shall pay to the Builders in advance, interest on the amount of outstanding bills together with any charges at the rate charged from time to time by the Swedish private com-

mercial banks for bills of the kind delivered (the rate at present being %).

The cost of additional work done as well as allowances made, in accordance with Clauses 2, 3 and 5 hereof, shall be settled in cash on the delivery of the Vessel.

If for any reason the Purchaser cannot take delivery of the Vessel on the date the Builders have notified that the Vessel will be ready for delivery, the Purchaser shall nevertheless be liable to make full and final payment on that date.

The bills shall mature at six monthly intervals and shall be redeemed by half yearly instalments of

beginning six months after the date of delivery. The Purchaser shall, however, have the right to redeem the amount of the bills wholly or in part at any time prior to their maturity dates.

As security for the bills the Purchaser shall on the delivery of the Vessel hand over to the Builders a first priority mortgage in a form to be approved by the Builders registered on the Vessel for the full amount of the bills and interest thereon.

If the Builders so desire, the Purchaser shall apply to a credit institution approved by the Builders for the largest sum obtainable by way of loan on the security of a mortgage on the Vessel and in her charterparty (if any). The amount of such loan shall be paid to the Builders as soon as received and the Builders shall then hand to the Purchaser bills of the same amount as the loan as well as the mortgage required for the loan. If and when such loan is redeemed the mortgage thereby released shall be transferred to the Builders in exchange for any mortgage of lesser priority which the Purchaser may have created on the Vessel in favour of the Builders.

As long as any part of the bills remains unpaid the Purchaser shall keep the Vessel after delivery fully insured with such underwriters, insurance companies or institutions and on such terms as approved by the Builders for all marine and other risks and protection and indemnity risks and war risks, with (if possible) mortgagee's protection insurance in addition. The policies shall provide (unless otherwise agreed) that all losses and claims shall be paid direct to the Builders who shall be entitled, out of the proceeds of the insurances, to retain an amount sufficient to meet what is owing by the Purchaser to the Builders.

If, at the time of delivery, there exists an abnormal international situation affecting currency and/or importance conditions which may, in the Builders' opinion, prejudice the ready transfer of money to the Builders, the Purchaser shall at the request of the Builders redeem on delivery of the Vessel all outstanding bills or make available a guarantee acceptable to the Builders.

In addition to the foregoing the "General Loan conditions" annexed to this Contract shall apply.

§ 11.

If payments in accordance with Clause 10 hereof are not made on due dates, the Builders shall be entitled to interest on the amount due, until payment made, at the highest rate charged by the Swedish private commercial banks for short term loans on securities other than bonds or real estate mortgages, with a minimum of 6%.

If, during the period of building, any payment is more than thirty days in arrear, the Builders shall have the right to cancel this Contract and to claim damages according to law. If any delay in payment occurs after the delivery of the Vessel, the Builders shall be entitled to call for the immediate payment of all sums due from the Purchaser for the Vessel, with interest thereon.

§ 12.

If, by reason of circumstances of an exceptional nature, such as, for example, war, or the risk of war, or occurrences or incidents which have a like effect or consequence as war or the risk of war, the rate of wages, and/or costs and/or prices for materials increase to such an extent that it would be unreasonable for the Builders to bear the increase occasioned as aforesaid, then the Builders shall be entitled to request an additional payment from the Purchaser of an amount which the parties hereto may agree on a basis reasonable to them both. If the parties are unable to reach an agreement, the amount of the payment shall be decided by arbitration in the manner laid down in Clause 14 hereof.

Such payment shall be made in cash on the delivery of the Vessel.

§ 13

Until delivery has been effected, the Builders shall keep the Vessel and Insurance all parts intended for use in her construction insured against the usual builder's risks, including war risk and sabotage as from the launching until the delivery of the vessel, for an amount not less than the instalments paid on account by the Purchaser. If considered necessary by the Purchaser the Vessel shall also be insured for an amount equaling the difference between the contract price and the present repurchase price and the additional cost of such insurance shall be borne by the Purchaser.

Should the Vessel be a total loss the parties may agree to cancel this contract and the Builders shall thereupon refund to the Purchaser the instalments paid on account of the contract price, plus interest and, in the event an additional insurance has been taken for the repurchase price, the difference between the contract price and the repurchase price.

§ 14

This contract shall be construed and the relations between the parties determined in accordance with German law. Disputes shall be settled by arbitration at the venue of the place of building according to the German law relating to arbitrations.

If the Builders so require the Purchaser shall lodge such security as is approved by the arbitrator(s) for costs and damages likely to arise from the arbitration proceedings. If the Purchaser does not meet this requirement, he shall be debarred from any further step in the proceeding.

§ 15

This contract cannot be assigned without the written consent of the Builders, which the Builders shall not unreasonably withhold. Assignment of contract

§ 16

The scope of supply for S. 592 is included in the specification for the Vessel. Scope of supply

§ 17

Defects in major forgings or castings can only be considered to constitute force majeure for the Builders provided the Builders have ordered the res-forgings and respective goods with utmost dispatch, have had the respective goods tested by X-ray or other available effective method either at the sub-contractors works or at the yard at the earliest possible date, and have taken every reasonable step to avoid delay and provided such defects and the resulting delay in the construction affects the delivery date of the Vessel.

§ 18

This contract is subject to the approval of Finlands Bank. Subject

This contract with attached specifications and drawings has been drawn up and signed by or on behalf of the parties hereto in duplicate, one copy being retained by each party.

Mariehamn, 11th September, 1979.

REPERIAKTIETBOLAGET SALLY
Sven-Erik Johansson

JOS. L. MEYER
Joseph F. Meyer

Witnesses:

E. Johansson

MF/Marco H.


1

Part of drawing dated 20.12.79


PRINZIP FÜR ROHVERLEGUNG 49111

79.12.20

A-DECK
2. DECK

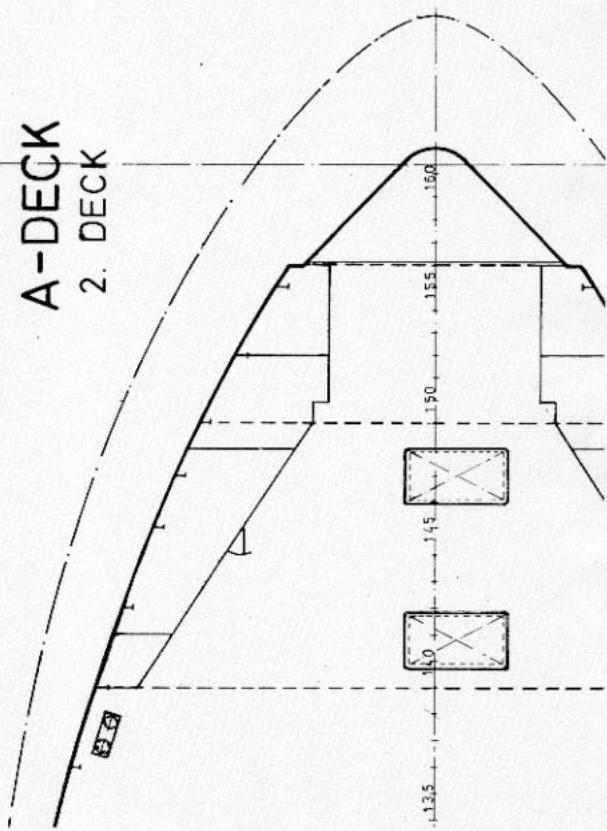

Part of ga plan as built

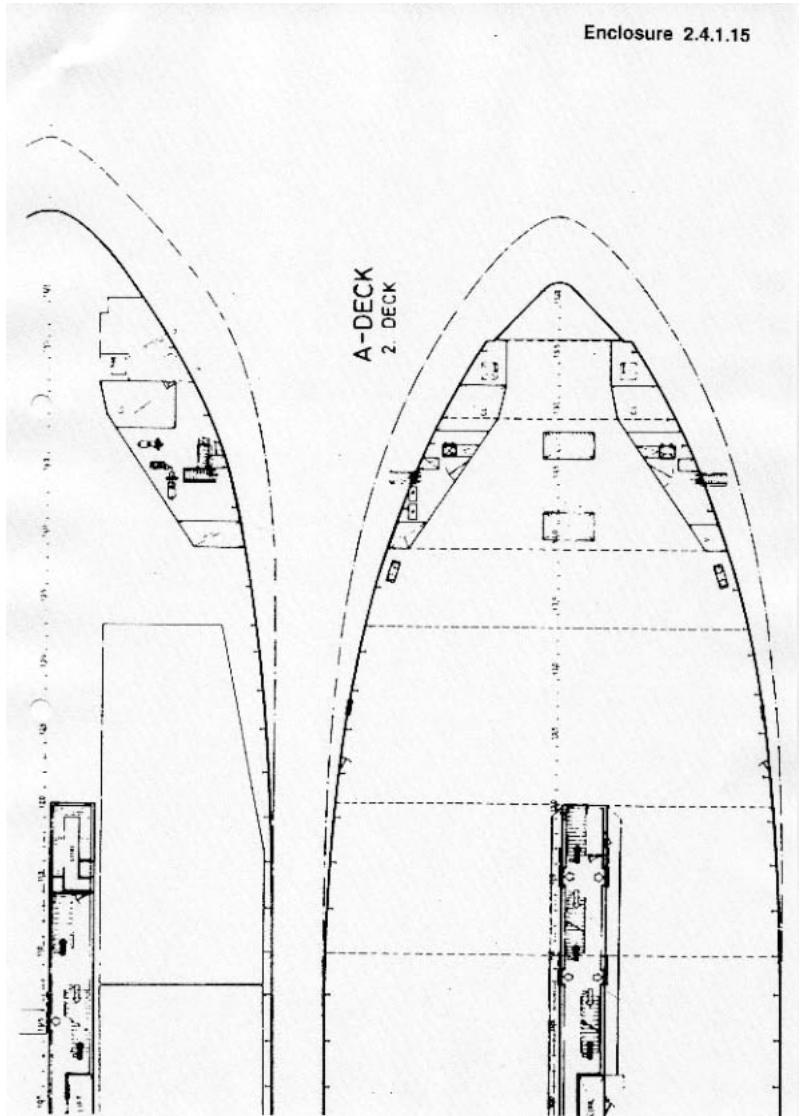

Telex P motikat to A johansson dated 30.08.79

RECEIVED - 105/10/79. TEL NO. 2378 30/8/79

att. Mr. Alf Johansson

81

-museum einer-fahne
-projekt nr. 5675/79-79

sehr geehrter Herr Johansson,

bezugnehmend auf das gestrige Telefongespräch möchte ich Ihnen hiermit aufzeigen, welche mit Ihnen besprochenen Punkte in meinem angebot mir es vom 28.6.79 nicht bzw. modifiziert berücksichtigt worden sind:

1. Klasse: Bureau Veritas anstelle von Det Norske Veritas.
 2. Maschinenanlage wird gebaut nach den Vorschriften und mit Abnahmen von b.v., die Automation wird ausgelegt nach den Vorschriften von b.v. fuer das Klassenzeichen (Aut), jedoch ohne Abnahme.
 3. Schleppversuche sind nicht vorgesehen, da mit dem Bau des Schiffes nach Auftragserteilung sofort begonnen werden muss, zur Information koennen sie zu einem spateren Zeitpunkt, falls gewunscht, durchgefuehrt werden.
 4. Die genannten US-Vorschriften sind bei diesem Schiff nur teilweise zu erfüllen, die Regeln, die nicht eingehalten werden koennen, werden Ihnen aufgegeben.
 5. Die statischen Qualitaetsnormen fuer den Schiffskorper werden entsprechend den Vorschriften von b.v. gewaehlt.
 6. Bug- und Heckkampfseitenordnung entsprechend: "diana li".
Betriebsdruck der Hydrauliksaetze bis 250 bar.

ich hoffe, Ihnen hiermit gezeigt zu haben.

mit s.
jos.L. meyer, papenburg
oerz. motikat

271.1By 3dypb dttttttccccccccc
6315-6Lgqt sf

Memo concerning conversion, viking sally/ earl granville

Jos. L. Meyer, Papenburg-Ems

Schmitzwerk, Maschinenfabrik, Dachbetrieb

- 2 -

Umbau "VIKING 4"

Die Werft erhielt für englische Fischerei den Auftrag, die "VIKING 4" umzubauen. Dieses Schiff wurde 1973 unter der Baunummer S. 570 von der Werft an die Reederei SALLY abgeliefert und wurde erfolgreich von der VIKING-LINE im Verkehr zwischen Schweden und Finnland eingesetzt, bis sie jetzt durch die neue Fährengeneration, zu dem auch Neubau S. 590 "VIKING SALLY" gehört, ersetzt wird. Nach dem Sommersaison 1980 kommt das Schiff nach Papenburg, und die Werft wird folgende umfangreiche Arbeiten durchführen:

- Einbau einer neuen Hauptmotorenanlage
 - Einbau einer Flossenstabilisierungsanlage
 - Umstellung des Schiffes auf englische Flagge (Erfüllung der DOT-Vorschriften)
 - Änderungen in der Einrichtung für den neuen Liniendienst
 - Wartungsarbeiten.

Nach Rücklieferung des umgebauten Schiffes Anfang 1981 wird das Schiff von der Reederei SEALINK U.K. LIMITED gechartert und im Verkehr zu den Kanalinseln eingesetzt werden.

Papenburg, 25. Juni 1980

Page 11 of 11

Note by h wahnes- more /less list

1. Art [he Order] 1. 592

24. 6. 22

BR 1) Förderungspolitik KfW

Enclosure 2.4.1.18

4-18 a) Para 452 fallt in alle Para 226.

Stadt und Landesregierung / Steuerei.

a) Heid. ca. 320 Sekt. und Preis -

Angabe 150,- Reich + 12 f. Brandgriff.

b) Neuer Betriebsvertrag mit 900 m

fallt 800 m. ca. 500 Sekt. 100,- ?

c) Cottbus - 1500 m. Zeitabstand -

d) Brand. Kosten 700,- & statt 800 m

100,- 180

4-19 d) Städte Sonder-Bewilligung f. sp. 1000

1000,- mehr zu erzielen (453) 11.7.69 623

4-19a i) Bayreuth: "nur weiterhin Handels-

16.10.67 510,- zur Gewinnung kann je Stück 350,- was

fließt 200,- (Kupferspigel abziehen)

4-20 p) Röthen am Schwarzen See ab dem 1. 1.

fallt min. 2.4. - 200,- (453)

voll 3) Supermarkt (453) wurde so angep.

fließt min. 2.4. ca. 15,-

2. 5-4 i) Offenbach 100,- für Verlustposition

für Gewinn fallt. (5-4) (EVAK-Anlage

5-4 ii) Hanau und Spandau in öffentl. W's

fallen. (et. Händelstruktur)

ii) Dachau?

3-21 i) Liquidationskosten werden aus der Brutto

ca. 4.000 30.000,- ? (453)


2-28 iii) Berlin wird in Brutto 50.000,-

ca. 12.000 (2-2)

- 2 -

8. a) 3-3 Kollisionsschäde gefüllt.
 ca. 7.000 ... 18.000.
 - 9. b) 16. Türe im Oberdeck beschädigt
 und teilweise 2.000 20.000.
 - 10. c) 2-10 Fenster zerstört aus dem
 dritten Decksgang 100-150.
 - 11. d) 444 Fußböden und Treppen 3-4,
 diese unter Wasser oder zerstört.
 - 12. e) Bruchfall von Fenstern am U-Boot
 das 1. Rückwand ca. 12.000.
 13. f) Verluste für Überlebende?
 14. g) Schiffsliste:
 Pos. 1 Seile vom Heck zu Wurf vom
 4.9.74 dann von Achterkajüt
 15. h) Pos. 2 Für Wasserfälle gefüllt sind sie
 Pos. 1, seitenrichtig innen und
 zwischen den Zimmern.
 Pos. 3 out.
 Pos. 4 o.u. verloren
 Pos. 5 o.u. ~ ~ ~
 Pos. 6 ~ ~ ~
 Pos. 7 ~ ~ ~
 Pos. 8 ~ ~ ~
 Pos. 9 ~ ~ ~
 Pos. 10 ~ ~ ~ Landungswert? 9.240.

Part of drawing 1116 arrangement of the lanterns

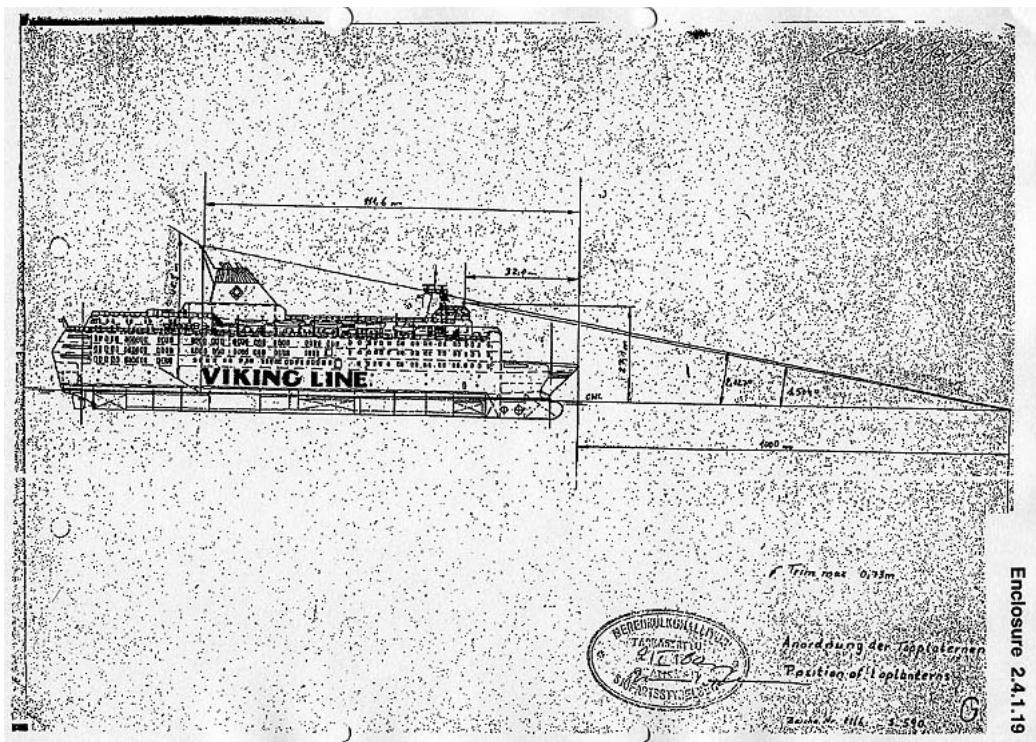

Purchase order no.3344/74 von tell

Enclosure 2.4.1.19

JOS. L. MEYER PAPENBURG-EMS

SCHIFFSWERFT

MASCHINENFABRIK

DOCKBETRIEB

Von: Tell UmsbX

Sophienallee 24

2600 Papenburg 12

Telefon: Hannover (0511) 811
 Fax: 0711/811
 Telefax: Meyerwerft Papenburg
 Postfach: Hannover (BLZ 51010050) Kto. 12700 003
 Bank: Oldenburgische Landesbank AG, Fr. Hannover
 BLZ 263 212 180 Kontonr. 1859204
 BLZ 263 200 002 Kontonr. 1859205
 BLZ 263 200 002 Kontonr. 1859206
 BLZ 263 200 002 Kontonr. 1859207
 Landesbank Hannover Niedersachsen, Filiale Leer
 BLZ 300 000 000 Kontonr. 055 00002
 Geschäftsstelle: 7:00 Uhr bis 16:00 Uhr

MEIN ZEICHEN: 2000 PAPENBURG 1
 MEIN ZEICHEN: HAUPTKANAL RECHTS 2
 MEIN REF.: DIREKT EXTENSION
 MEIN REF.: POSTFACH 1120
 KK-KR-01 (0 40 111 01 /211 27. Sept. - 1979)

Auftrag-Nr. 3344/79 - S. 500 - In allen Briefen, Rechnungen, Verandschriften, Frachtbriefen und/oder Versandanzeigen und Rechnungen zweck fach erbetet.

Hiermit erteile ich Ihnen nachstehenden Auftrag zu meinen wesentlichen Einkaufsbedingungen. Auftragbestätigung sofort erwünscht.

Technische Daten:

Referenz: siehe Seite 12 und 13

Menge	Artikel	Preis
Poz. 1	Hydraulische Befüllung für eine Bugklappe	

Die Bugklappe wird von Ihnen, wie von mir angegeben, mit einem Gewicht von 760 angesogen. Sie wird von zwei direkt angeschlossenen Hydraulikzylindern bewegt. Die Zylinder erhalten in Gelenklagern am Stiel Flächenteller aufgeschoben. Die direkt hinter den Zylindern vorgeschobene Drosselrohrzuleitung verleiht regelmässig die Schlaggeschwindigkeit des Hydraulikzylinders unter Ablauf einer Drehbewegung, die auf dem Bugdeckel abläuft.

Die Verriegelung der Bugklappe geschieht durch einen hydraulischen Zylinder, der ausgeschaltet, dass die Bugklappe abgeschalteter Hydraulik die Verriegelung

- 2 -

Jos. L. Meyer, Papenburg (Em)

Blatt: 2 zum Auftrag Nr. 3344/79 - S. 500

am 27. Sept. - 1979

Menge	Artikel	Preis
1	sicherstellt, da der Verriegelung werden Kontaktkontakte vorliegen, die bei geschlossener Verriegelung in der Hubverplatte und auf der Irdack befindlichen Lampen einschalten. Es wird eine zusätzliche Verriegelung für die Atlantik sicherung vorgesehen. Das Bugzylinder wird mit einer hydraulisch betätigten Feststellvorrichtung, welche nach Beendigung des Öffnungs vorganges bewegt wird, versehen. Die Bugklappe wird gegen die Bugklappe hydraulisch verbleckt.	
2	Ihr Lieferumfang für diese Anlage umfasst:	
1	Hochdruck-Hydraulikzylinder, Drossel rückschlagventile, Achsen mit Schmier nuten und Schmierschläppen sowie die erforderlichen Hochdruck-Hydraulikschläuche.	
1	Die erforderlichen Hochdruck-Hydraulikzylinder für die Verriegelung, die Verriegelung selbst, einschl. Achsen mit Schmier nuten und Zippeln, Hoch druckschläuche und Kontakt halter für die optische Anzeige.	
1	Hochdruck-Hydraulikzylinder für die Atlantikverriegelung mit Verstärk bolen, Achsen mit Schmier nuten und Schmierschläppen sowie Hochdruck Hydraulikschläuche.	
2	Hydraulikzylinder mit Vorstanthalben für die Sicherung der Bugklappe in geöffneter Stellung, einschl. der Achsen mit Schmier nuten und Zippeln und den Hochdruck-Hydraulikschläuchen. Die Zylinder werden hydraulisch aus geschaltet, das die Bugklappe zwangs weise verriegelt wird, wenn sie ganz geöffnet ist. Dagegen soll die Verriegelung beim Schließen der Bug klappe getrennt erfolgen.	

- 3 -

Joh. L. Meyer, Poppenburg (Em)

Blatt 3 zum Auftrag N. 3344/79 - H. 590 -

27. Sept. 1979

an von Tell Gmbh

Menge	Technische Zeichnung	Umriss-Plan
1	<p>Kastenplatte mit den hinterrgehenden hydraulischen Steuerungseinheiten für die vorstehend beschriebene Verriegelungsvorlage, einschl. Liegeplattform für geschlossene Verriegelung, Automatikverriegelung und Verriegelung in geöffneter Stellung, ferner Pumpenstart- und -Stop mit optischer Anzeige. Die hydraulischen Steuerungseinheiten werden verrohrt und die elektrischen Teile, soweit erforderlich, verkabelt.</p>	
2	<p>Beschläge für die manuelle Sicherung der Bugklappe</p> <p>Sie liefern ferner das hydraulische und, soweit erforderlich, auch das elektrische Schaltschema für die vorstehend beschriebene Bedienungen der Bugklappe, einschl. der Lüftungsunterlagen mit der Anordnung der Hydraulikzylinder und Verriegelung mit Angabe der Kräfte, die im Schiffskonstruktions eingesetzten werden müssen. An nicht oder schwer zugängigen Schniersstellen werden automatische Schnierschüsse angebracht.</p>	
Pos. 2	<p><u>hydraulisch betätigtes Bugrampe</u></p> <p>Die Bugrampe mit einer Länge von 7,625 m für eine Breite zwischen den Mauern von 5,5 m kann von 0,6 m mit einer Achslast von 12,0 t bei 1,3 m Achshöhestand und einem Radstand von 2,0 m befahren werden.</p> <p>Die wasserseitige Rampe hat an der Vorkante bewegliche Verlängerungen von 1,5 m Länge, die automatisch über Hebeleinstellung ausgeklappt werden können. Die Aufzulager werden im mittleren Teil als Galionsklappen ausgeführt. Die Rampe wird durch 2 direkt angetriebene Zylinder, die Galionsklappen betätigt. Die Zylinder erhalten eine Hydraulikleitung, die auf die Rampe den Schiffsbewegungen folgen kann. Die Verriegelung der geschlossenen Rampe erfolgt ebenfalls hydraulisch. Sie wird so ausgetötigt, daß sie auch bei</p>	- 4 -

Joh. L. Meyer, Poppenburg (Em)

Blatt 4 zum Auftrag N. 3344/79 - H. 590 -

27. Sept. 1979

an von Tell Gmbh

Menge	Technische Zeichnung	Umriss-Plan
1	<p>abgeschalteter Hydraulik für Verriegelungssicherstellung. An der Verriegelung werden Kontaktschalter vorgesehen, die bei geschlossener Verriegelung in der Handvorpflatte und auf der Brücke befindliche Lampen einschalten. Die Bugklappe wird gegen die Bugrampe hydraulisch verblockt. Die Hauptzylinder erhalten je 1 Rohrbruchsicherung und Absenkventile.</p> <p><u>Ihre Lieferung umfaßt:</u></p> <p>Bugrampe, kompl. mit Vorläufen in den vorgenannten Abmessungen und Belastungen. Die gesamte Fahrbahnbreite wird als Futschisicherung mit Quadratstahl in Flanschgratenform verlegt. Es werden feststehende Geländer vorgeschenkt, Achsen mit Schnierschrauben und Mippolen für die Befestigung am Schiffskörper. Die Stahlkonstruktion wird gesattelt mit ca. 2,5 mm und mit Epoxydharz ca. 30 kg konserviert. An nicht oder schwierig zugänglichen Schniersstellen werden automatische Schnierschüsse angebracht.</p>	
2	<p>Hydraulikzylinder, Drosselzöpfschlagventile, Achsen mit Schnierschrauben und Schnierschüsse sowie Hochdruck-Hydraulikschläuche.</p> <p>Die erforderlichen Hydraulikzylinder für die wasserseitige Verriegelung, die Verriegelung mit Achsen mit Schnierschrauben und Schnierschüsse, Zuschlußschläuche, Steuerschieber und Kontaktenschalter für optische Anzeige, ferner die erforderlichen Guanti-dichtungen.</p> <p>Handverplatten für die hydraulische Betätigung und Verriegelung liegen wie unter Pos. 1 beschrieben.</p> <p>Erforderliche Zeichnungen w. i. unter Pos. 1 beschrieben.</p>	
		- 5 -

Joh. L. Meyer, Papenburg (Ems)

Blatt 1 zum Auftrag Nr.

3311/79 - S. 390 -

vom 27. Sept. 1979

von Teil GmbH

Menge	Artikel-Nr.	Preis
Pos. 3	2	<p>hydraulisch betätigte Heckrampe</p> <p>Die Heckrampen, Längen 6,5 m und Breite 1,5 m (optisch: das Schwenkendeckelbrett bildet den Wasserstand des Wagenraums am Heck), die Belastbarkeit wird wie bei der Bugrampe vorgesehen. Die Vorläufe von 1,5 m Länge erhalten einen Ansteil, so daß sie sich beim Aufliegen der Rampe auf den KFV von selbst richtig aufliegen. Die Außenlager werden im mittleren Teil als Gelenkkörper ausgebildet. Die Verriegelung und Zentrierung erfolgt wie unter Pos. 2 für die Bugrampe beschrieben. Die Bugrampe wird gegen die Heckrampe hydraulisch verbleibt.</p> <p>Jede der Heckrampen erhält einen Anschlag für eine Kette oder Seil, um die Rampe im Notfall auch öffnen und befahren zu können, ohne daß sie am KFV aufliegt. Die andere Heckrampe erhielt Beißring für Ureventer.</p> <p>Drei Lieferung umfaßt:</p> <p>2 Heckrampen, komplett mit Vorläufen in den vorgenannten Abmessungen. Die Ausführung der Rampen: mit drehendem LKW-Feste und Zusatzverstärkern; wie für die Bugrampe beschrieben. Alnicht- oder schwer zugänglichen Schlußstellen werden automatische Schieberstifte angebracht.</p> <p>Je Rampe 2 direkt angelenkte Hydraulikzylinder, Drosselrohren, Antriebslinie, Achsen mit Schmierzapfen und Schmierdüsen sowie Hochdruck-Hydraulikkupplung.</p> <p>Für jede Rampe die erforderliche Schiene, Hydraulikzylinder, Führung, Vierdienteile, Verriegelung, die Verriegelung selbst mit Achsen mit Schiene, Zapfen und Schmierzapfen, Hochdruck-Hydraulikkupplung, Stegverschluß aber sowie Kontaktenschalter für die vertikale Ansteige.</p>
		- 6 -

Joe L. Meyer, Papenburg (Em)

Bildt 6 zum Auftrag Nr. 3344/TP - E. 590 -

an von Tell Gmbh

-- 27. Sept. 1979

Menge	Pos. 1	Pos. 2
	<p>Jo. Hanape 2 Hubschraub-Zylinder Für jede Hanape die erforderlichen Gummibüschungen</p> <p>Handverplatten für die hydraulische Betätigung der Hanape und die hydrau- lischen Verriegelungen, sonst wie unter Pos. 1 beschrieben.</p> <p>Die erforderlichen Zeichnungen wie unter Pos. 1 beschrieben.</p>	
Pos. 4	<p>hydraulisch betätigtes Passagier- Seitentor auf dem C- und D-Deck</p> <p>Die Seitentore, lichte Breite 2,5 m und lichte Höhe 2,0 m, sind einfügig, je auf einem Schwenkarm angelegt und öffnen parallel ge- führt nach außen. Die Tore werden komplett mit den erforderlichen Sogen- nennen angeliefert, wie die lie- fernden Fertiger so im die Außenhaut angebrachte und verschweißt werden können. Die Gummibüschungen werden lose mitgeliefert.</p> <p>Ihre Lieferung je Pforte umfaßt, d.h. versch. Stückzahlen genannt sind, - tx.</p> <p>Türblatt mit Verstärkungen und Lager, Entrostung und Kassettierung; wie unter Pos. 2 beschrieben.</p> <p>Schwenkarm mit Lager</p> <p>Parallellenkern mit Lager und Höchst- druck-Hydraulikzylinder</p> <p>Die erforderlichen Verriegelungs- zylinder für die wasserdichte Ver- riegelung, die Achsen mit Schnell- muttern und Schmierlippen, Höchst- druck-Hydraulikschläuche, Steuer- schieber und Kontaktenschalter für die optische Anzeige.</p> <p>Handverplatte für die Betätigung und Verriegelung, sonst wie unter Pos. 1 beschrieben.</p>	
	- 7 -	

Joe L. Meyer, Papenburg (Em)

Bildt 7 zum Auftrag Nr. 3344/79 - E. 590 -

an von Tell Gmbh

-- 27. Sept. 1979

Menge	Pos. 1	Pos. 2
	<p>Die erforderlichen Zeichnungen wie unter Pos. 1 beschrieben.</p>	
Pos. 5	<p>hydraulisch betätigtes Lotzen- Tore auf dem A-Deck</p> <p>Die Seitentore, lichte Breite 1,2 m und lichte Höhe 2,0 m, sind einfügig und werden nach innen um 90° hydrau- lisch geschwenkt. Die sonstige Aus- führung wie unter Pos. 4 aufgeführt.</p> <p>Lieferumfang je Pforte:</p> <p>Unter Berücksichtigung der anderen Betätigungsart wie unter Pos. 4 ausge- führt.</p>	
Pos. 6	<p>hydraulisch betätigtes wasserdichte Luke für Waschbäder auf dem A-Deck</p> <p>Der Klappdeckel verschließt eine lichte Öffnung von 2,4 m breit und 1,2 m lang und wird über die lange Seite hydraulisch betätigt und ver- riegelt. Der Lukendeckel wird für die gleichen Belastungen wie bei der Bug- rampe angegeben ausgelegt.</p> <p>Ihre Lieferung umfaßt:</p> <p>Lukendeckel mit Verstärkungen und Lagern, einschl. Gummibüschungen, kassettiert wie unter Pos. 1 aufge- führt.</p> <p>Den erforderlichen Hydraulikzylinder für das Öffnen und Schließen der Luke, die erforderlichen Hydraulikzylinder für die wasserdichte Verriegelung der Luke, einschl. der Verriegelung selbst, Achsen mit Schnellmuttern und Schmierlippen, Höchstdruck-Hydraulik- schläuche, Steuerschieber und Kon- tactschalter für die optische An- zeige.</p> <p>Handverplatte für die Betätigung der Luke und Verriegelung, sonst wie unter Pos. 1 aufgeführt.</p>	
	- 8 -	

Jos. L. Meyer, Papenburg (Em.)
Blatt: 8 zum Auftrag Nr.: 3344/79 - S. 590
an von Teile Schrift

vom 27. Sept. 1979

Menge	Inhalt
Pos. 7	<p>2 hydraulisch mechanisch betätigtes Hängedeck mit Auffahrrampen</p> <p>Am BB-Seite des Schiffes sind 3 Hängedecksktionen und 2 Auffahrrampen von je ca. 20 m Länge und 1,5 m Breite; an BB-Seite ebenfalls 1 Hängedecksktion und 2 Auffahrrampen von je ca. 20 m Länge und 1,5 m Breite; an BB-Seite ebenfalls 1 Hängedecksktion und 2 Auffahrrampen von je ca. 20 m Länge und 1,5 m Breite vorgesehen. Auf dem Hängedeck und Rampe können Fahrzeuge mit einem Raddruck von 100 kg direkt an dieck gestellt werden. Die vollbeladenen Rampen können aus der Rampenstellung in die Horizontale gehoben werden.</p> <p>In Staustellung liegen die Hängedecks und Auffahrrampen hydraulisch hochgezogen und verriegelt unter dem C-Deck.</p> <p>Jede Hängedecksktion wird durch einen hydraulischen Flanschringung, der in die Hängedecksktionen eingesetzt ist, sowie mit Stahlrollen und Umlenkrollen betätigt. Die Flanschenringe sind für das Zentrieren der leeren Hängedecksktionen ausgelegt. Abseits des Liegen der Hängedecksaktionen auf Seiten Konsole. Jede Sektion erhält einen eigenen Steuerstand.</p> <p>Die Rampen werden ebenfalls mit hydraulischer Flanschenringen bewegen, die jedoch an der Außenwand angebracht und über Umlenkungen mit Stahlrollen mit den Rampen verbunden werden. Die Rampen können mit Fahrzeugen von einer Rampe aus der Rampenstellung in die Horizontale gehoben werden.</p> <p>Die Funktionen, welche der 1. Rampe in die Horizontale abheben, liegen in der Außenwand zwischen der Rampe und Rahmen der leeren Hängedecksktion unter dem C-Deck. Die 2. Rampe kann von einem 2. Steuerstand aus der Rampenstellung durchgeführt.</p> <p>Die Sicherung der Rampen in Staustellung unter dem C-Deck erfolgt hydraulisch in horizontaler Anbaustellung mechanisch durch Klappverschlüsse.</p>

Jos. L. Meyer, Papenburg (Em.)
Blatt: 9 zum Auftrag Nr.: 3344/79 - S. 590
an von Teile Schrift

vom 27. Sept. 1979

Menge	Inhalt
5	<p>Die Beschreibungen für die Hängedecksanlage werden nach meinen Angaben vorst. Ihnen mit im Decke und Rampen vorgetragen.</p> <p>Überlieferung vertrag:</p> <p>Hängedecksktionen mit Umlenkrollen, Fundamente für die Hydraulikflaschen, Hydraulikleitung und Konservierung wie Pos. 1.</p>
6	<p>Hängedeck-Auffahrrampen, Dickeblech gen. nicht nehmen Wunsch aus Tränenblech.</p> <p>Die erforderlichen Stahlstützenrollen, die nicht in die Decks oder Rampen eingebaut werden, mit Stahlachsen, jedoch ohne die Käfige, Steuerschieber, Höchststahl-Hydraulikschläuche sowie Kontakt-Schalter für optische Anzeige.</p>
7	<p>Die erforderlichen Klappständer mit Gelenk.</p> <p>Die erforderlichen Hydraulikflaschen zum Fahren der Decks und Rampen, einschließlich erforderlicher Hydraulikzylinder, sowie Verstärker usw., wie Ecken und weiteren Zubehör für die hydraulische Verriegelung der Decks und Rampen in Staustellung unter dem C-Deck.</p>
12	<p>Montagepläne für Decks und Rampen, sonst wie oben.</p> <p>Die erforderlichen Leichsen gen. etc., wie Pos. 1 sowie zusätzliche die Leichsen für die Umlenkrollen - Käfige, die nicht in den Decks oder Rampen eingesetzt werden.</p>
Pos. 8	<p>Hydraulische Betätigung mit 2 Passagier-Übergängen</p> <p>Zwischen dem Mitteschiffsausgang auf dem Hängedeck und dem Gangdecker auf BB-Seite und der Zwischendeck durch Passagier-Übergänge übersteicht werden. Die Übergänge selbst werden verfüllig gefertigt. Sie müssen für die Hydraulik und Steuerung.</p>

Joh. L. Meyer, Papenburg (Ems)

Blatt 16 - vom Auftrag Nr. 3344/79 - S. 590

am 27. Sept. 1979

an von Tell GmbH

Menge	Inhalt	Preis
	<u>Ihre Lieferung umfasst:</u> Die erforderlichen Hydraulikzylinder mit Schubstangen, mit Schiebern und Schieberköpfen, Hochdruckhähnen und Steuerschieber.	
2	Manöverplatten für die Belebung der Übergänge und die hydraulische Verriegelung, sonst wie Pos. 1.	
Pos. 9	Die erforderlichen Leichungen wie Pos. 1.	
4	<u>Elektrische-Hydraulik-Zentrale:</u> und zwar: 2 mit jeweils 3 Pumpen als Kompaktsäulen zusammengebaut, für Bug- und Heckhydraulik und Hängedecks mit Aufahrtrampen versorgen. 1 mit 2 Pumpen als Komplettheit zusammengebaut für die 3 Passagierporten und die 2 Passagier-Übergänge. 4 mit 2 Pumpen als Komplettheit zusammengebaut für die Maschinenrumen und Laderäume. Sicherheit vorgesehen, daß 1 von den großen Aggregaten je eines im Vorschiff und einer im hinteren Schiff zur Aufstellung kommt. Es wird vorgesehen, daß die getrennten Rohrleitungssysteme dieser beiden Anlagen Ventile so vorruhen werden können, daß 1 je einen Aggregat auf das Rohrleitungssystem des anderen Aggregates und ungekehrt gefahren werden kann. Die Förderleistung von 2 Pumpen der 1er-Aggregate wird so dimensioniert, daß sich folgende reine Betriebszeiten ohne Verriegelung einer der beiden ergeben: Dachklappe ca. 60 sec. Bug- oder Heckrampe ca. 40 sec. Aufahrtrampen ca. 30 sec. Hängedeck ca. 15 sec. - 11 -	

Joh. L. Meyer, Papenburg (Ems)

Blatt 17 - vom Auftrag Nr. 3344/79 - S. 590 -

am 27. Sept. 1979

an von Tell GmbH

Menge	Inhalt	Preis
	<u>Die 3. Pumpe je Aggregat wird als Reservepumpe vorgesehen.</u> Die weiteren Doppelpumpenaggregate für die Pforten, Passagier-Übergänge und Luke erhalten je 2 Pumpen gleicher Förderleistung, von denen 1 sind in der Lage, eine Pforte bis ca. 15 sec. zu öffnen bzw. zu schließen auch wiederum als reine Reservepumpe, ohne die Verriegelung. Die 1. Pumpen wird auch hier als Reserve vorgesehen.	
	<u>Ihre Lieferung je Kompaktsäule umfasst:</u> Ültank mit den erforderlichen Hochdruck-Hydraulikzylindern (2 x 1 Stück, 2 x 2 Stück), einschl. der 1-Metres für 350 V, 50 Hz. Überdruckventile, Niveauschalter, Ültankdrosselvige, Manometer, By-Pass-Ventile, Absperrschieber, Rückschlagventile und die Ventile für die Kreuz-Schalldämmung.	
	<u>Ihre Lieferung umfasst elektrisch betreute an den Klemmstellen der X-Knoten.</u> Sie liefern die erforderlichen Leichungen wie Hydraulikschaltuhren, Rohrleitungssystem etc.	
Pos. 10	<u>Reserveaggregate nach den Vorschriften der Klassifizierungsgesellschaft bzw. Ihren Standard. Die genaue Spezifikation folgt.</u> Da keine Fernsteuervorstellungen nicht realisierbar waren, fertigen Sie nach Ihren Zeichnungen Pos. 2 1. Bugrampe Pos. 3 1. Heckrampe Pos. 7 5 Hängedecks und 4 Aufahrtrampen Auch der Anbau der von Ihnen bestimmteten Teile und Beschläge sowie der Einbau der Betriebszähler und Hydraulikzähler erfolgt durch Sie.	

Joh. L. Meyer, Papenburg (Em.)

Bor. 12 zum Auftrag N. 3344/79 - B. 390 -

27. Sept. 1979

von Well GmbH

<u>Mehrpreis</u>		
GESAMT-MEHRSATZ	DM 650.000,-	

	+ frei Werft	
	+ MW-Standort	
Über die folgenden Mehr- und Minde-		
rlieferungen und nach einer Klärung mit		
dem Reeder wird hierbei geöffnet werden,		
und zwar:		
Lieferung und Einbau von 130 Sensoren		
Mehrpreis: DM 3.250,-		
Falls die Luke für den Massenladekran		
einfach! Angriffe (Fes. 6) entfällt.		
Minderpreis: DM 10.400,-		
Falls die Seiten türen mit 4 Sandpumpen		
ausgerüstet werden müssen.		
Mehrpreis: DM 4.000,-		
Falls dafür 1 Motorpumpe aufzubauen,		
Minderpreis: DM 3.000,-		
Falls die Bugklappe mit automatischer		
Versiegelung versehen wird	DM 1.000,-	
Mehrpreis: DM 3.500,-		
<u>Lieferungen von Fahrzeugen mit 3 Platten</u>		
Fragebogen der vorliegenden Zeichnungen		
für die Rücksiede zur Fertigung bis		
Kunde das 30. XII. 1979;		
Mindestens der neuen Isolationslagen für		
die neuen Rücksiedeckung bis Ende		
hekteter Woche.		
Lieferung der Zeichnungen für Auffahrrampe bis zur 42. IV. 1979.		
Lieferung der Zeichnungen für Heckrampe		
bis zur 45. IV. 1979.		
Lieferung der Zeichnungen für Bugrampe		
bis zur 48. IV. 1979;		
Vorlage sämtlicher X-Pläne bis zum		
31. XII. 1979. Die X-Werte legt die mir		
bis zur 48. IV. 1979 vor.		
Klarheiten der Hydraulik-Schaltsets bis		
KUN. 31. XII. 1979.		

- 13 -

Joh. L. Meyer, Papenburg (Em.)

Bor. 12 zum Auftrag N. 3344/79 - B. 390 -

27. Sept. 1979

von Well GmbH

<u>Mehrpreis</u>		
<u>DIREKTLIEFERUNG</u>		
2 Seitengelenke kompl. und Beschläge		
für Rücksiedeck, Heck- und Bugrampe		
und Bugklappe bis zum 31. XII. 1979 auf		
der Werft.		
Hydraulikmaterial für die Rücksiedeck-		
und Gangway bis zum 31. XII. 1979 auf der		
Werft.		
Hydraulikzylinder bis zum 28.02.1980 auf		
der Werft.		
Pumpenaggregate bis zum 15.01.1980 auf		
der Werft.		
<u>KONVENTIONALSTRAFEN</u>		
Bei Überschreiten der vorgenannten		
Liefertermine zahlen Sie nach Ablauf		
einer Fristfrist von 14 Tagen eine		
Konventionalstrafe im Höhe von 0,5 %		
je Volumen pro Tag vom Auftrag gerechnet.		
<u>ZAHLUNGSBEDINGUNGEN</u>		
10 % - nach Erhalt der Auftragsbestätigung		
30 % - nach Erhalt der 1. Materiallie-		
ferung 31.12.1979;		
55 % - bei Lieferung des Kommatierials		
06.02.1979		
5 % - bei Ablieferung des Schiffes an		
die Reederei (Ende Juli 1980).		
In dem obigen Preis ist eine Montur-		
gestaltung von 35 Tagen für jeden Stahl-		
bau bei normaler Arbeitszeit und ein-		
maliger Ab- und Rückfahrt eingeschlossen.		
Ferner eine kostenlose Monturgestaltung		
für einen Montagelinspektor für die		
Wahrnehmung der Anlagen.		
<u>ANMÄLDE - FEST</u>		
Die vorgenannten Anlagen sind nach Vor-		
schrift und mit Abschlag auf Fest des		
hierunter Verfassten Auf und den im hiesigen		
Rechte - Finanz - Handelsregister -		
eingetragen.		

- 14 -

Int'l. Mayer, Posenburg (Fer.)

Tele. 14 zum Autoren-Nr.

3344/79 - S. 390 -

von Tell Gauth

17. Sept. 1979

Menge	Lieferzeitraum	Preis
	<p>SCHEINDECK in englischer Sprache</p> <p>INSTRUMENTENPUNKTE</p> <p>1 x schwedisch/englisch 1 x Deutsch</p> <p>WIRKLICHLEISTUNG</p> <p>1. Die Gewährleistungsfrist beträgt 15 Monate nach Schiffsablieferung, jedoch max. 18 Monate nach Verkauf der Liefergegenstände.</p> <p>2. Im Gewährleistungsfall tragen Sie die Kosten für die Kosten der Montage und für von den Montierern benötigtes Hilfspersonal. Außerdem tragen Sie die Kosten der aus Werk- und Ausbau benötigten Materialien ff. die Liefergegenstände.</p> <p>Voraussetzung dazu ist, dass die Arbeiten unter ihrer Aufsicht in einem deutschen oder norddeutschischen Kafen durchgeführt werden.</p> <p>3. Weiter tragen Sie die Transportkosten für ausgetauschte reparierte Teile zwischen Ihren Werk und Aufstellungsort der Anlage. Sofern innerhalb der Garantiezeit die Lieferung der Arbeitsmänner in einem anderen Land als in dem vorgenannten erfolgen, tragen Sie die Kosten in der Höhe, wie sie normalerweise in einem der vorgenannten Häfen entstehen würden.</p> <p>4. Für im Rahmen der Garantie geleisteten Reparaturen beginnt die Gewährleistungsfrist mit deren Abschluss und nicht nach 18 Monaten.</p> <p>Zur die Abwicklung dieser Bestellung gelten keine Kalkaufbedingungen.</p> <p style="text-align: center;">Rückichtnahme volla</p>	

Statement G todsen

Enclosure 2.4.2.21

Günther Todsen, geb. 31. Juli 1932
wohnhaft Möhnweg 4, 24109 Kiel
Telefon: 0431 / 527591

Ich habe Kfz-Mechaniker in Eckernförde gelernt und diese Lehre 1951 beendet. Anschließend bin ich Lkw gefahren und habe dann 1955 bei HDW-Kiel als Stahlbauschlosser angefangen. Im Jahre 1959 begann HDW im Auftrage der Firma von Tell/Göteborg Lukendeckel zu bauen. Bestandteil des entsprechenden Vertrages zwischen HDW und von Tell war die Gestaltung eines Monteurs bei der Montage der Lukendeckel an Bord sowie bei eventuellen Reparaturen. Dies wurde meine Aufgabe. Ich habe also in den folgenden Jahren überwiegend den Einbau sowie die Reparaturen von Lukendeckeln auf Neubauten deutscher und ausländischer Werften überwacht. Mein erster Kontakt mit der Meyer Werft in Papenburg war der Auftrag durch Herrn Rottmann sen. der Firma von Tell, an einer Vorbesprechung über den Einbau von Bugvisier, Bug- und Heckrampe sowie Hängedeck und Außentüren in dem Neubau "DIANA II" teilzunehmen. Dies war im Februar 1979. Ich erinnere das deshalb so genau, weil wir durch den seinerzeitigen zweiten Teil der "Schneekatastrophe" Probleme hatten, mit dem Auto nach Hause zu kommen.

Zirka Anfang April 1979 nahm ich meine Arbeit in Papenburg auf. Kurz vor Himmelfahrt hatte ich einen Arbeitsunfall an Bord der "DIANA II", bei dem ich mir einen Trümmerbruch des großen Zahns des rechten Fußes zuzog. Dadurch fiel ich für mehrere Wochen aus und konnte daher die "DIANA II" nicht fertigstellen. Nach meiner Genesung habe ich Lukendeckel auf verschiedenen Neubauten eingebaut, bis ich im April 1980 den Auftrag bekam, auf dem Neubau "VIKING SALLY" der Meyer Werft in Papenburg den Einbau von Bugvisier, Bug- und Heckrampe, Hängedecks und Außentüren - wie bereits zuvor bei der nahezu baugleichen "DIANA II" - zu überwachen.

Meine Aufgabe bestand im einzelnen darin, die Werft beim Einbau der durch von Tell gelieferten Bauteile bzw. der durch die Werft nach von Tell-Konstruktionszeichnungen gebauten Teile zu unterstützen und die Arbeiten der Werft in dieser Hinsicht zu kontrollieren. Ich hatte eine große Anzahl von Detailzeichnungen dieser Bauteile zu meiner Verfügung, aus denen sich z.B. die Dimensionierung dieser Teile, aber auch die Schweißnahtstärke ergaben. Ich hatte Kopien dieser Zeichnungen in meinem Keller bis vor etwa zwei Jahren aufbewahrt, sie dann aber beim Aufräumen weggeworfen, da für mich nicht erkennbar war, daß ich sie jemals wieder gebrauchen würde.

Als ich meine Tätigkeit auf der "VIKING SALLY" aufnahm, befand sich das Visier in geschlossener Lage starr durch verschiedene angeschweißte Flach- und Profileisen mit dem Schiffskörper verbunden. In dieser Situation überwachte ich folgende, im Werftbereich durchgeführte Arbeiten:

a) Einbau der Scharniere

Die Bohrungen für die Buchsen waren in der Halle mittels eines Bohrwerks ausgeführt worden. Ich habe die Bohrungen persönlich in Augenschein genommen und befühlt, bevor die Buchsen eingebaut wurden und kann bestätigen, daß es sich keinesfalls um gebrannte Löcher gehandelt hat. Ich hätte eine derartige Pfuscharbeit, wie sie auf den mir vorgelegten Fotos der Restschamierbleche der "ESTONIA" zu sehen ist, niemals abgenommen. Für den Fall, daß die Werft meine Einwände nicht zur Kenntnis genommen hätte, wäre ich von Bord gegangen und hätte meine Auftraggeber informiert.

So ist es z.B. auf einem Schiff in Dünkirchen gescheten. Ich hatte den Auftrag, die Reparaturen von Lukendeckeln auszuführen. Als die Besatzung sich weigerte, mir die nach meiner Auffassung und Erfahrung erforderlichen Ersatzteile, ohne die die ordnungsgemäße Reparatur nicht möglich gewesen wäre, zur Verfügung zu stellen (obwohl diese an Bord waren), habe ich mich geweigert, die Arbeit fortzuführen und bin zurück nach Kiel gefahren.

An Bord wurden unter meiner Aufsicht die Stahlbuchsen in die Visierarme eingeschweißt und anschließend soweit ausgebohrt, daß die Bronzebuchsen paßten. Diese Bohrungen wurden sehr genau ausgeführt, so daß Backbord und Steuerbord genau in der Flucht waren, um Bruchbelastungen beim Öffnen bzw. Schließen des Visiers zu vermeiden. Anschließend wurden die Bolzen eingeführt, wobei gleichzeitig die Distanzringe (2 mm Stärke) eingesetzt wurden. Ich erinnere diese Arbeit insbesondere deshalb sehr genau, weil es sich um eine ziemliche "Fummelci" handelte. Diese Bolzen waren aus NIROSTA-Stahl und mit einer Fettnut mit Schmiereimpel verschen. Mittels dieser Schmiereimpel waren die Scharniere mindestens einmal pro Woche per Fettpresse zu schmieren.

Mir sind die Unterwasservideoaufnahmen der "ESTONIA" sowie mehrere Standfotos gezeigt worden. Darauf habe ich u.a. die Scharniere des Visiers mit Bolzen und teilweise Buchsen auf dem Backdeck des Schiffes identifizieren können.

Im einzelnen habe ich folgendes festgestellt:

Backbord-Scharnier:

- Bolzen mit davorhängender äußerer Buchse aus der mittleren, fest eingeschweißten Buchse gerutscht und auf dem angrenzenden Geländer stehend;
- der Distanzring ist nicht erkennbar;
- die Fettnuten am Bolzen sind nicht sichtbar;
- an der Unterseite der mittleren Buchse befindet sich ein rundes, ca. 50 mm breites Loch, von dem Rost- und Fettstreifen auf das direkt darunter liegende grüne Deck gelaufen sind. Eine derartige Öffnung ist beim Neubau nicht vorhanden gewesen;
- an beiden Scharnierblechen sind an den Vorkanten oben Kontakt- bzw. Aufschlagspuren sichtbar;
- der Bolzen glänzt auffällig; dies wäre nicht möglich bei einem Fettfilm.

Steuerbord-Scharnier

- Bolzen ohne äußere Buchse aus der mittleren, fest eingeschweißten Buchse gerutscht und auf dem angrenzenden Geländer stehend;
- der Distanzring ist nicht erkennbar;
- an beiden Scharnierblechen sind an den Vorkanten oben Kontakt- bzw. Aufschlagspuren sichtbar.

Darüber hinaus sind mir auch Fotos einer vom Wrack geborgenen Scharnierbuchse gezeigt worden. Auf den Fotos sind u.a. Teile der Schweißnähte zwischen dieser Buchse und dem Visierarm zu sehen. Ich kann ausschließen, daß es sich dabei um die Schweißnähte handelt, die seinerzeit beim Bau der "VIKING SALLY" durch Schweißer der Meyer Werft gelegt wurden.

b) Seitenverriegelungen

Soweit ich erinnere, waren die Augen für die hydraulischen Verriegelungen sowie die Haken für die manuellen Verriegelungen bereits auf die Achterkantschotte des Visiers geschweißt. Auf jeden Fall wurden die Gegenstücke auf der Schiffsseite dazu passend angegeschweißt.

c) Atlantik-Sicherung

Die drei auf das A-Deck geschweißten Augen sowie das an der Achterkante des Visierbodens angebrachte Auge sind Werflieferungen. Die drei erstgenannten Augen wurden mit Übermaß angefertigt. Es ist aus der entsprechenden Zeichnung ersichtlich, daß die beiden Buchsen der Bolzen sowie Zylinder mit Zylinderstange und die Endlageschalter (Sensoren) von Tell-Lieferungen waren. Das Auge des Visiers wurde angeschweißt und als Festpunkt bei der Ausrichtung der anderen drei Augen der Atlantik-Sicherung benutzt.

Beide Buchsen wurden in der Werkstatt so in die Augen eingeschweißt, daß die große Buchse zwischen Mittel- und Backbordauge und die kleine in das Steuerbordauge mit dem Stützblech paßte. Wie bereits oben erwähnt, lagen mir für alle Einzelteile Detailzeichnungen vor, aus denen u.a. auch die Stärke der Schweißnähte hervorging.

Mir sind Fotos von zwei der drei Restaugen der Atlantiksicherung vorgelegt worden, auf denen auch die Schweißnähte sehr gut zu sehen sind, mit denen die Buchsen mit den jeweiligen Augen verbunden waren. Ich schließe aus, daß es sich bei diesem höchstens 3 mm dicken Schweißnähten um die Originalschweißungen handelt. Diese sind nach meiner Erinnerung mindestens dreimal so dick gewesen. Ich habe die Schweißungen der Buchsen vor dem endgültigen Einbau kontrolliert und hätte derartige Schweißnähte, wie sie auf den mir vorgelegten Fotos zu sehen sind, niemals akzeptiert.

Der Einbau der Atlantik-Sicherung vollzog sich bei geschlossenen, wie oben beschriebenen Visier, wie folgt:

- Der Festpunkt war das Visierauge;
- danach wurden Hydraulikzylinder und die drei Augen mit bereits zuvor angeschweißten Buchsen ausgerichtet, passend gebrannt und angeschweißt.

Dabei habe ich insbesondere darauf geachtet, daß die drei Augen gleichmäßig, d.h. innen und außen gleich, auf das A-Deck geschweißt wurden und weiterhin dafür gesorgt, daß unterhalb jedes Auges in der Leerzelle unter dem A-Deck eine Verstärkung angebracht wurde.

d) Bugrampe

Die Bugrampe wurde ebenfalls unter meiner Kontrolle eingebaut und ausgerichtet. Die Sicherungsbolzen wurden angepaßt. Beim Verriegeln der Rampe klappten zunächst je ein Haken an jeder Seite über die entsprechenden Teile der Rampe und zog die Rampe nach innen, bis ein bestimmter Topunkt erreicht und überschritten war. Jetzt lag die Rampe an. Anschließend fuhren auf jeder Seite zwei Bolzen aus dem Schiff nacheinander in entsprechende Taschen an der Rampe.

Diese Bolzen rasteten hörbar in ihren Endstellungen ein. Da von dem Bedienpult auf dem Autodeck weder Visier- noch Rampenverriegelungen einsehbar waren, mußte sich der Bediener auf die Kontrolllampen und auf sein Gehör verlassen. Man konnte deutlich hören, wie die Bolzen mit knackenden Geräuschen in den Taschen einrasteten. Erst bei vollständigem Einrasten der Bolzen wurden die Sensoren betätigt, was - wenn alle Bolzen und auch die Haken entsprechenden Kontakt mit den Sensoren hatten - dazu führte, daß am Bedienpult und auf der Brücke "grün" aufleuchtete, d.h. Rampe geschlossen und verriegelt.

e) Gummidichtungen

Der Einbau der 50 mm dicken Gummidichtungen wurde mittels eines Innenstesters alle 300-400 mm der Abstand zwischen den gegenüberliegenden Teilen Visier/Schiff gemessen und - wo Abweichungen festgestellt wurden - wurden diese mit Flacheisen ausgeglichen. Dadurch war gewährleistet, daß die danach eingebauten Gummidichtungen bei geschlossenem Visier einen absolut gleichmäßigen Anpreßdruck hatten, da sich das Visier ca. 8-10 mm in die Gummidichtungen eindrückte und dadurch einen wasserdichten (wetterdichten) Abschluß des Innenraumes des Visiers bildete.

f) Erprobungen im Zusammenhang mit der Abnahme


Während der Werftprobefahrt nach Helgoland wurde u.a. auch das Visier auf seine Dichtigkeit geprüft. Es befand sich in vollständig verriegeltem Zustand, d.h. auch die manuellen

Verriegelungen waren eingelegt. Ich habe bei voller Fahrt, d.h. ca. 2,5 m hoher Bugwelle und leicht stampfendem Schiff, mit dem B.V.-Besichtiger Lohmann und einem Vertreter der Reederei, dessen Namen ich nicht erinnere, im Innenraum des Visiers gestanden und festgestellt, daß das Visier nicht völlig wasserdicht war, sondern an einigen Stellen etwas leckte. Nach Rückkehr wurden in Enden die Gummidichtungen mit Schlemmkreide eingeschmiert, das Visier geschlossen und anschließend wieder geöffnet. Aufgrund der verbleibenden Abdrücke wurden die lecken Stellen ermittelt und entsprechend wurden die Gummidichtungen in diesen Bereichen angehoben. Bei einer anschließenden erneuten Dichtigkeitsprobe wurde das Visier für dicht befunden und durch Reederei, Klasse und finnische Schiffsicherheitsbehörde endgültig abgenommen.

Die offizielle Abnahme war - nach erfolgreicher Funktionsprobe am 19. Juni 1980 - bereits am 20. Juni 1980 erfolgt. Anschließend wurde die in der Anlage beigelegte Abnahmeebescheinigung ausgefüllt und von Vertretern der Reederei, des B.V., der Werft und meinem Kollegen Brandt unterschrieben.

Ich habe die "VIKING SALLY" zuletzt bei ihrer Kiel-Kanal-Passage in die Ostsee geschen und danach mit dem Schiff keinen Kontakt mehr gehabt.

Hamburg, den 26. Juli 1995

Günther Todsen


Office Translation

Günther Todsen, born July 31, 1932
address: Möhnweg 4, 24109 Kiel
telephone: 0431 - 527591

states:

I became an auto mechanic in Eckernförde and terminated my apprenticeship in 1951. Afterwards I drove a truck and then in 1955 started work at HDW-Kiel as a steel construction mechanic. In 1959 HDW began to build hatch covers for von Tell/Göteborg. Part of the corresponding contract between HDW and von Tell was the supply of a mechanic to supervise the mounting of hatch covers onboard as well as possible repairs. This was my work. In the following years I thus supervised the installation as well as the repairs of hatch covers on newbuildings for German and foreign yards. My first contact with Meyer Werft in Papenburg was the participation in a meeting upon instruction of Mr. Rottmann, sen. when the installation of bow visor, bow and stern ramps as well as hanging decks and outer doors were preliminarily discussed. This was in February 1979. The reason for my recalling this so well is that we had tremendous difficulties getting home by car due to the 2nd part of the so-called "snow catastrophe".

Circa at the beginning of April 1979 I took up my work in Papenburg. Shortly before Ascension Day (national holiday in Germany) I had an accident at work onboard "DIANA II" shattering the big toe of my right foot. I was on sick leave for several weeks and therefore could not complete my work on "DIANA II". After my recovery I installed hatch covers on several newbuildings until in April 1980 I received the order to supervise - as previously for the practically identical construction on "DIANA II" - the installation of the bow visor, bow and stern ramps, hanging decks and outer doors on the newbuilding "VIKING SALLY" for Meyer Werft in Papenburg.

My work in detail consisted of assistance to the yard for installation of the components delivered by von Tell resp. the components made by the yard according to the von Tell construction drawings, and of supervising the yard's work in this respect. I had a large number of detail drawings of these construction parts at my disposal, which showed the dimensions of these parts and also of the welding seams. I had saved copies of these drawings in my basement until about two years ago, but then threw them away while cleaning out the basement because I didn't think I would ever need them again.

When I started work on "VIKING SALLY" the bow visor was in closed position, fixed to the ship's hull by means of various flat bars and structural bars. In this position I supervised the following work performed at the yard:

a.) Installation of Hinges

The bore holes for the bushings were made by means of a boring mill in the fabrication hall. I personally took a close look at the bore holes and touched them with my fingers before the bushings were installed and can confirm that by no means were they burned holes. I would never have accepted such dubbed work as can be seen on the photographs shown to me of the remnants of "ESTONIA's" hinge plate. In case the yard would have not taken notice of my objections I would have left the ship and would have informed my principals accordingly.

This was the case on a ship in Dunkerque. I had the order to execute the repair of the hatch covers. When the crew refused to put the necessary spare parts at my disposal, without which, in my opinion and experience, it was not possible to perform the repairs properly (although these parts were onboard), I refused to continue the work and returned to Kiel.

Under my supervision onboard the steel bushings were welded into the visor's arms and subsequently bored out to the extent that the bronze bushings did fit. These bores were carried out with extreme precision in

order that port side and starboard side were in alignment in order to avoid breaking tension when opening resp. closing of the visor. Subsequently the bolts were guided in whilst simultaneously the distance rings (2 mm thickness) were fitted. I recall this work especially because it was rather fumly work. The bolts were made of NIROSTA steel and had a grease groove with grease nipple. By means of these grease nipples the hinges had to be greased at least once a week by grease gun.

Underwater videos of the "ESTONIA" as well as several pictures have been shown to me. On these I have been able to identify a.o. the hinges of the visor on the forecastle deck of the vessel together with bolts and partly with bushings.

In detail I have found the following:

Port Hinge:

- Bolts with outer bushings hanging in front, having slid out of the middle firmly welded bushing and standing on the adjacent railing;
- the distance ring is not recognizable;
- the grease groove at the bolt is not visible;
- at the under side of the middle bushing there is a round ca. 50 mm wide hole, from which rust and grease have run onto the green deck directly below. Such an opening has not been there at newbuilding;
- at the upper front edges of both hinge plates contact resp. impact marks are visible.
- the bolt is noticeably shiny; this would not be possible if covered by a grease film.

Starboard Hinge

- Bolt without outer bushing having slid out of the middle, firmly welded bushing and standing on the adjacent railing;
- the distance ring is not recognizable;

- at the upper front edge of both hinge plates contact resp. impact marks are visible.

In addition to this, also pictures of a hinge bushing brought up from the wreck were shown to me. The photos showed among other things parts of the welding seams between this bushing and the visor arm. I can exclude that these welding seams are the welding seams made by welders of Meyer Werft during the newbuilding of "VIKING SALLY".

b) Side locks

As far as I remember, the lugs of the hydraulic locking as well as the hooks of the manual locking were already welded to the aft bulkhead of the visor. In any case the mating parts had been welded to the ship's side respectively.

c) Atlantic lock

The three lugs, welded to the A-deck, as well as the lug at the aft part of the visor's bottom are yard-supply. The 3 first mentioned lugs had been constructed with overmeasure. It can be seen from the respective drawing that both bushings of the bolt, the cylinder including piston rod and the limit switches (sensors) had been delivered by von Tell. The lug of the visor was welded and used as fixing point for the alignment of the other three lugs of the Atlantic lock.

At the workshop both bushings had been welded into the lugs in such a way that the large bushing fitted between the middle and the port lug and the small bushing into the starboard lug with the support bracket. As already mentioned above, I have had detail drawings for all components from which among others also the thickness of the welding seams were revealed.

Photographs were submitted to me, showing 2 of the 3 lug remnants of the Atlantic lock, on which welding seams can be seen very clearly, which had connected bushings with the respective lugs. I exclude that these welding seams, having a maximum thickness of 3 mm, are the original welds. According to my memory these welding seams had been at least 3 times as thick. I have checked the weldings of the bushings prior to final installation and would never have accepted such welding seams as recognisable on the photographs submitted to me.

The installation of the Atlantic lock was carried out as follows by closed visor:

- The fixing point was the lug of the visor
- accordingly hydraulic cylinder and the 3 lugs with already previously welded bushings were aligned, burned to fit and welded.

Thereby I paid special attention to the even welding of the 3 lugs to the A-deck, i.e. inner and outer side the same. Furthermore, I took care that below each lug, in the void space under A-deck, a reinforcement was fitted.

d) Bow ramp

The bow ramp as well had been installed and arranged under my supervision. The securing bolts were made to fit. During locking the ramp at first each one hook on each side of the corresponding parts at the ramp lowered and pulled the ramp inwards, up to a special point had been reached and passed. Now the ramp was tight in position. Then two bolts on each side were moving out of the ship into corresponding pockets of the ramp.

The bolts snapped audibly into their end positions. As from the control console on the car deck neither visor nor ramp-locking devices could be seen, the operator had to rely on the control lamps and his sense of hearing. It was clearly audible by snapping noises when the bolts engaged the pockets. Only after the bolts had fully engaged did the sensors become activated, which - if all bolts and also the hooks were in contact with the sensors - led to the "green light" at the control console as well as on the bridge, i.e. the ramp was closed and locked.

e) Rubber packings

Prior to installing the 50 mm thick rubber gaskets every 300 - 400 mm the distance between the opposite parts visor/ship were measured by means of an inside callipers and ascertained deviations were compensated by flat iron. This way guaranteed that the afterwards installed rubber gaskets had absolutely the same contact pressure, as the visor was pressed into the rubber gaskets up to 8 - 10 mm, which made the inside of the visor watertight (weathertight).

f) Testing in connection with acceptance

During the trial trip to Helgoland a.o. also the visor was checked in respect of its tightness. The visor was totally locked, i.e. also the manual locking devices were closed.

During full speed - i.e. about 2,5 m high bow wave and slightly pitching vessel - myself, Mr. Lohmann, surveyor of Bureau Veritas, and a representative of the owners, whose name I do not remember, were inside the visor and noted that the visor was not totally watertight, but at some places water was slightly leaking through. After returning to Emden the rubber packings were marked with chalk, the visor was closed and opened again. Due to the remaining imprints the leakages were found out and the rubber packings were raised in these particular areas. During a subsequent

tightness test the visor was found to be tight and finally accepted by the owners, the classification society and the Finnish board of navigation.

The official delivery took place already on 20th June 1980 - after successful function test on 19th June 1980. Afterwards the attached Delivery Certificate was filled in and signed by representatives of the owners, the B.V., the shipyard and my colleague Brandt.

I have seen the "VIKING SALLY" the last time when passing the Kiel Canal to the Baltic sea. Since that time I have never been in contact with this vessel again.

Hamburg, the 26th July 1995

signed by Günther Todsen

Receipt /transfer certificate of visor

Enclosure 2.4.2.22

AN KOM 7 JULI 1980

VON TELL

Rechnungs-Nr. 24
7-111-77

MOTTAGNINGS- EL. ÖVERLÄNNINGSBVIS^{x)}
Abnahme- oder Übergabebescheinigung^{x)}
Receipt or Transfer Certificat^{x)}

4911.1/80.151.1

von Tell-Ihr.: *FIRING SOHN*
M.S.

VARV } Joe L. Moyer NYBYGGE/OBYGGE^{x)} } 500
Bauwerft } Shipyard) Neubau/Neubau^{x)} Newbuilding/Rebuilding^{x)}

REDERI } Gally. KLASSE } Bureau Veritas
Reederei } Reederei Klasse
Shipping Co. Class

MONITOR } G. Todesen DATUM } 20. 6. 80
Service-Mann } H. Brundt Datum
Mounter Date

VATTENPROVNING/LUCKMANÖVRERING/ÖVERLÄNNING^{x)}
Wasserprobe/Deckelhandöver/Übergabe^{x)}
Waterproof/Hatch Operating/Transfer
LUCKOR } 1. Bodenloch, 1. Bugkranpox, 4. Heckkranpox, 4. Deckungspox
Lukens } 2. Achterdeck, 2. Ladekantportalen, 3. Steuerdecke mit Aufzehr-
Hatches }
..... " Wasserdichtmachung

ANMÄRKNING
Bemerkung Notes } *Notfall. 100% Etalering. St. Engelsborg*

MEBVERKANDE:
Teilnehmer:
Co-Operator:

REDERI } *E. Stig L. J. B.*
Reederei
Shipping Co.
KLASS } *Jf*
Klasse
Class
VARV } *Wenell*
Werft
Yard
von TELL *Heribert Braunsch*
UTIFÄRDANDEN } *G. Brundt* x) IKKE ILLAMPLIGA STRYKES
Ausfertigungen Issues Nichtzutreffendes streichen
Not applicable cross over



Telex von tell AB gothenburg to BV hamburg

To DTI - Ha Secretari
Ha Comarit
Sect 353 87 -
21542617934 ♀
20617 vontell s 80-03-18/868 10.10.34 SP.

good afternoon this is von tell ab gothenburg/sweden

att.: mr desoussa

re.: ferry in papenburg
bow visor
our ref 4911.1

we refer to phone conversation with mr desoussa.

in lack of bv rules we have used the lr rules and got

total horizontal force abt 230 tonne
total vertical force abt 470 tonne

we have calculated with the two side cleatings and the atlantic
securing device and will then have a load of abt 80 tonne for
each device.

calculated shear stress will be 800 kp/cm² and bending stress
2400 kp/cm².

we think we are slightly above the stress permitted by lr and
we could change the present steel with min breaking strength of
50 kp/mm² to a material with a breaking strength of 90 kp/mm².

please advise++


35 kp/m²

regards
von tell / a eriksson

♀
21542617934 ♀
20617 vontell s

Meyer werft calculations of visor loads

Angrifende Kräfte nach BV-RULES 1976

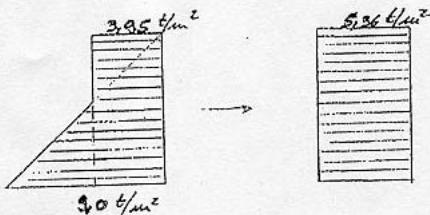


Kraftangriffspunkt im Flächenschwerpunkt
der projizierten Flächen:

$$P_x = 381 \text{ to}$$

$$P_z = 536 \text{ to}$$

$$G = 60 \text{ to}$$

(2)

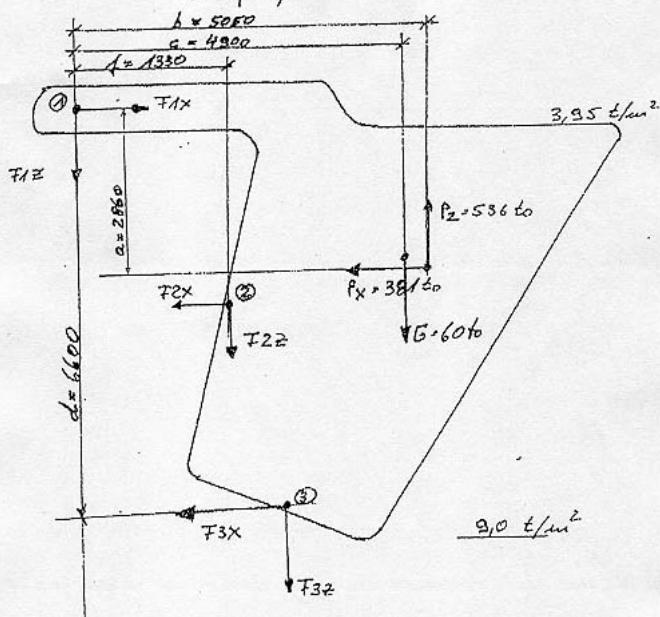Bugklappe 590Kraftsystem

(3)

Gesamt horizontalkraft:

$$R_x = \frac{P_2(b - \ell_2) - G(c - \ell_2) - P_x \cdot a}{d} = 152,5 \text{ t}_0$$

Gesamt vertikalkraft:

$$R_z = P_2 - G = 476 \text{ t}_0$$

Sugesamt 5 Aufhängepunkte

$$F_{ix} = R_x/5 = 30,5 \text{ t}_0$$

$$F_{iz} = R_z/5 = 95,2 \text{ t}_0$$

$F_R = \sqrt{F_{ix}^2 + F_{iz}^2} = 100 \text{ t}_0$

→ 100 t0 Belastung / Aufhängepunkt


Mindes + querschnitt für Augen:

(4)

Material: St 52-2

$$R_{\text{eff}} = 355 \text{ mm}^2 \Rightarrow k = 0,75$$

$$F_{\text{zul}} = 123 / k \Rightarrow 164 \text{ N/mm}^2$$

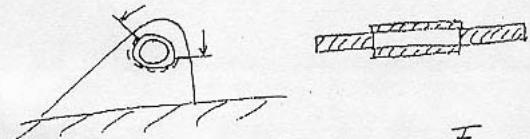

$$\sigma = \frac{F}{A} \quad A_{\text{min}} = \frac{F}{164}$$

$$A_{\text{min}} = \frac{100 \text{ t}_0}{164 \text{ N/mm}^2} = 6,100 \text{ mm}^2$$

Memo concerning checking of old von tell files

Enclosure 2.4.2.25

The German Group of Experts
investigating the sinking of M/V "ESTONIA"
c/o AHLERS & VOGEL · Schaar tor 1 D-20459 Hamburg · Telephone 49-40-37 85 88-0

Memo

Betr.: Besuch bei Kvaerner Ships Equipment AB, Göteborg und Durchsicht der
alten von Tell AB Akten bezüglich "Diana II" und "Viking Sally"

Am 8. und 9.1. d.J. wurde die

Kvaerner Ships Equipment AB

Kämpegatan 3

S-411104 Göteborg

Tel. + 46 - 31 - 725 7900

Fax + 46 - 31 - 705 40 4062

besucht und mit tatkräftiger Unterstützung des Managing Directors Göran K. Johansson, des Sales Managers Dan Magnusson sowie des Consultants Per Fagerlund insgesamt 42 Ordner und Schnellhefter mit Konstruktionsunterlagen und Korrespondenz der Firma von Tell & Trading AB, Göteborg bezüglich "Diana II" und "Viking Sally" durchgesehen.

Zur Vorgeschichte wurde folgendes mitgeteilt:

- Kvaerner hat Ende der 80er Jahre den Aktenbestand mit Kundenkartei aus der Konkursmasse der von Tell & Trading AB gekauft, ohne die Firma selbst zu übernehmen, die als Name nach wie vor besteht und mit der Nummer von Kvaerner im Telefonbuch von Göteborg steht. Die Akten waren in 20-25 Kartons verpackt, die gesichtet wurden und der interessante Teil wurde in das Kvaerner Archiv direkt im Bürogebäude übernommen (ca. 20 lfd. Meter Aktenordner) während der Rest in Kartons in einem Schuppen eingelagert blieb, wo er sich nach wie vor befinden soll.

- Als die "Estonia" Katastrophe bekannt wurde, war Peter Rösholm MD in Göteborg (jetzt Kvaerner, Rostock) und veranlaßte
 - (a) Schreiben an das Kommunikationsministerium vom 13.10.94 gemäß Anlage 1, welches mit Schreiben vom 9.2.95 beantwortet wurde (Anlage 2);
 - (b) Durchsicht der "Diana II" und "Viking Sally" Akten und Information über deren Vorhandensein an der schwedischen Teil der Internationalen Kommission offenbar telefonisch;
 - (c) Kalkulation der Verriegelungen des Visiers mit dem Ergebnis, daß die LCC - nach heutigem Standard – im unteren Bereich lag.
- Im 2. Halbjahr 1995 meldete sich Jan-Ove Carlsson – MD von MacGregor, Göteborg, und verlangte Akteneinsicht. Dieses wurde von Göran Johansson, der inzwischen Peter Rösholm als MD abgelöst hatte, zunächst abgelehnt und um Vorlage einer entsprechenden Vollmacht durch die Internationalen Kommission ersucht. Diese wurde kurz darauf durch Börje Stenström erteilt und J.O. Carlsson beschäftigte sich daraufhin 2 Tage mit den Akten und kopierte diverse, im einzelnen nicht bekannte Teile der Akten. Dafür waren Teile der Akten für mehrere Wochen außer Haus.
- Als nächstes meldete sich im Dezember 1996 Tuomo Karppinen, der anschließend in Begleitung von Klaus Rahka sowie eines weiteren Mitarbeiters der VTT, Helsinki, erschien und einen Tag mit den Akten verbrachte. Anschließend besuchten sie noch die

GRIMMEREDS VERKSTADS AB

in Göteborg, wo alle Komponenten der Verriegelungssysteme beider Schiffe, mit Ausnahme der von der Werft hergestellten Augen, angefertigt worden waren. Angeblich sollen sie da von einem langjährigen Mitarbeiter abgefertigt worden sein, nachdem sie ihre Theorie vorgetragen hatten, und mit hängenden Köpfen wieder abgezogen sein.

- Danach war wieder Ruhe bis sich im Vorfeld der Veröffentlichung des Berichtes der Internationalen Kommission mehrere Medienvertreter meldeten, denen jedoch Einsicht in die Akten verwehrt wurde.

Das Ergebnis der Aktendurchsicht durch den Unterzeichneten läßt sich folgendermaßen zusammenfassen (nur bezogen auf die Verriegelungen von Visier und Bugrampe):

1. "Diana II" – S 592 - 48611

- 1.1. Es sind alle Zeichnungen einschl. Detailzeichnungen vom Entwurf bis zur BV genehmigten Endfassung mit handschriftlichen Vermerken in rot (Original) vorhanden. Es wurden jedoch keine durch das Sjöfartsverket Rotterdam genehmigten Kopien gefunden. Dieses ist wahrscheinlich mit der bis zur "Estonia" Katastrophe durch Sjöfartsverket, wie auch F.B.N., verfolgten Philosophie zu erklären, nämlich daß alle strukturellen Komponenten Sache der Klasse seien. Dieses bezog sich jedoch offensichtlich nicht auf die Belastung der Hängedecks, über die noch weit nach Indienststellung der "Diana II" mit dem Sjöfartsverket korrespondiert wurde.
- 1.2. Es gibt einen Ordner mit handschriftlichen Berechnungen plus Tipstreifen für die Bereiche:
 - Bug- und Heckkrampenverriegelungen – keilförmige Bolzen (7 Seiten)
 - Belastung Autodecks und Rampen (10 Seiten)
 - Verschlußanordnung Maschinenraumluke (3 Seiten)
 - Autodeck und Auffahrrampen (42 Seiten)
 - Heckkrampen
 - Bugvisier – ohne Inhalt

- 1.3. In den insgesamt 3 Korrespondenzordnern, die vollständig zu sein scheinen, wurden u.a. folgende Bemerkungen gefunden:
 - Besprechung 26.7.78: Visier soll mit 2 hydraulischen Bolzen verriegelt werden, Atlantiksicherung wird von der Werft gemacht.
 - Besprechung 14.9.78: Bugrampe nach 11-44.21 als Kollisionsschott unter Berücksichtigung der rollenden Last.
Bugvisier wie benachbarte Außenhaut gemäß 11.-44.22, also 1,75 ts.
 - 19.10.78 mit BV-de Souza:
Bugrampe muß spritzwasserdicht sein.
Bugrampe = Kollisionsschott.
Bugklappe: - Gummidichtungen müssen durch Schraubverbindungen befestigt werden;
- Hydraulische Verriegelung plus Handverriegelung
 - 20.10.78: Es waren für das Visier ursprünglich 4 manuelle Sicherungen vorgesehen, dieses wurde am 3.10.78 auf Vorschlag von Tell auf 2 reduziert und von der Werft akzeptiert.
 - 15.12.78: Einsatz von Todsen abgestimmt.
 - 22.12.78: BV hat uns darauf aufmerksam gemacht, daß die Löcher in der Schottwand (Frontschotten) für Verschlußanordnung abgedichtet werden müssen.
 - 5.1.79: Kommentar zur Änderung des Visierscharniere.
 - 9.1.79: Nach Rücksprache mit der Werft wollen Sie sich wegen der Farben für die Lampen der Verriegelungsanzelge nach den Vorschriften der schwedischen Behörden richten.
Todsen weist darauf hin, daß im Falle einer Beschädigung der Gummipackungen des Visiers, die Endlagenschalter der Atlantiksicherung unter Wasser stehen und fragt: Sind sie wassergeschützt?
 - 24.1.79: Die Reederei (Kure) besteht darauf, die Verriegelung des Visiers und die Atlantiksicherung zu trennen, d.h. 2 Steuerschieber.
 - 29.1.79: Es sind nur noch die Beschläge Atlantiksicherung auf dem Zeichentisch und sollen alsbald bestellt werden.

- 5.2.79: Atlantiksicherung liegt noch auf dem Zeichentisch.
- 12.2.79: Endgültige Zeichnungen Atlantiksicherung 372 + 373 + Details abgeschickt.

2. "Viking Sally" – S 590 - 49111

2.1. Es sind Zeichnungen vorhanden, auch Detailzeichnungen mit Schweißnahtstärkenangaben, z.B. für Rampenhaken 5 mm, jedoch keine Originale mit den handschriftlichen BV-Eintragungen.

2.2. Aus den Bestell- bzw. Rechnungsordnern geht hervor, daß die Beschläge für Bugrampe und Visier gemäß Zeichnungen
49111 – 304 / 305
49111 – 360 / 361
49111 – 371 / 372 / 373

am 5.11.79 bei Grimmered bestellt und am 21.12.79 (Rechnungsdatum) geliefert wurden.

Anmerkung: Das bedeutet, daß die Komponente der Atlantik- und Seitenverriegelungen bereits fertig vor Ort waren, als sich die Diskussionen zwischen de Souza und von Tell AB über die Dimensionierung im März/April 1980 abspielten.

2.3. Der Korrespondenzordner, wie auch jedwede Kalkulationsordner, fehlen. Auch eine Durchsicht des Kvaerner Archivs führte zu keinem anderen Ergebnis. Kvaerner wird jedoch die Kartons im Schuppen gelegentlich durchsehen und sich melden, falls die Ordner auftauchen sollten.

3. von Tell & Trading AB Angestellte

Es ergibt sich aus den Unterlagen, daß es sich im Wesentlichen um folgende Personen gehandelt hat:

- Bo Bengtsson – Manager Design Office
- Bo Jonasson
- Alv Eriksson
- Herbert Brandt
- Tage Karlsson (TK)
- Sven Samuelsson
- Ernst Magnusson

Davon wurden vor Abreise des Unterzeichneten in Göteborg


Bo Jonasson (Gothenburg Port Authority)

Alv Eriksson (retired)

lokalisiert und werden in der kommenden Woche angesprochen. Der langjährige Mitarbeiter von Grimmered wurde ebenfalls lokalisiert, ist jedoch aufgrund einer Krebserkrankung nicht mehr ansprechbar. Die Fa.

Grimmered bemüht sich jedoch herauszufinden, ob eine 2. Atlantik-sicherung für "Viking Sally" geliefert wurde.

Hamburg, 11.1.98


Werner Hummel

KOMMUNIKATIONSDEPARTEMENTET
103 33 STOCKHOLM

ATT: KOMMUNIKATIONSMINISTERN

Ettat
Tillstånd
Dokt. ref.
Väntat
Dokt. ref.
PR/CAX
1994-10-13

SÄKERHET PÅ RO-RO FÄRTYG/FÄRJOR

Vi kontakter Er med anledning av den tragiska olyckan med M/S Estonia och den information som cirkulerar om tillsättande av en arbetsgrupp för att studera RoRo-fartygs säkerhet.

Kvaerner Ships Equipment AB konstruerar, säljer och utför service av fartygsutrustning såsom lastluckor, ramper, portar (bl.a. bogportar och bogvisir), hissbara bildäck, lastelevatorer etc.

Bolaget tillhör norska Kværner koncernen med aktiviteter inom skeppsbyggeri, rederverksamhet, offshore, skogs- och mekanisk industri. Kværner är idag en av världens ledande fartygsbyggare - och störst i Europa.


Vi vill med detta brev visa vårt intresse för att delta som experter i arbetet med att skapa säkrare fartyg och fartygsdrift i framtiden.

Vårt bolags kunskaper inom området är unika och vi har samtidigt tillgång till kunskaper och erfarenheter från koncernens aktiviteter inom områdena skeppsbyggeri, fartygsdrift och offshore.

Vår utrustning sitter i flera färjor som opererar i Nordsjön, Engelska Kanalen och i Isländska Sjön där väderförhållandena kan vara hårdare än de vi upplever i Östersjön.

Hoppas Ni finner denna information intressant och vi ser fram emot att höra från Er.

Med vänliga hälsningar


KVAERNER SHIPS EQUIPMENT AB

Peter Rösholm
Verkställande Direktör

KVÆRNER

Microsoft Word - D:\Kvaerner\Peter Rösholm\Kvaerner\Kvaerner Ships Equipment AB\Kvaerner Ships Equipment AB - 1994-10-13.DOC
Microsoft Word - D:\Kvaerner\Peter Rösholm\Kvaerner\Kvaerner Ships Equipment AB\Kvaerner Ships Equipment AB - 1994-10-13.DOC
Microsoft Word - D:\Kvaerner\Peter Rösholm\Kvaerner\Kvaerner Ships Equipment AB\Kvaerner Ships Equipment AB - 1994-10-13.DOC
C:\MSOFFICE\WINWORD\PR\12-10KOM.B



KOMMUNIKATIONSDEPARTEMENTET
Statsrådet och chefen

Annex 2

1995-02-09 K94/2638/2

Peter Rösholm
Kvaerner Ships Equipment AB
Kilsgatan 4
411 04 GÖTEBORG

Tack för Ditt brev kring säkerhet på Ro-Ro fartyg och färjor. M/S Estonia förlisning har förorsakat mänskliga tragedier. Det återstår mycket arbete för att klarrätta katastrofens orsaker.

Vi måste också medverka till att sjösäkerheten förbättras i framtiden. Regeringen har därför tillsatt en kommitté för att analysera möjligheterna att ytterligare utveckla säkerheten inom sjöfarten. Kommittén skall lämna förslag om hur det nationella och internationella sjösäkerhetsarbetet bör inriktas och bedrivas för att förbättra säkerheten främst i den sjöfart som berör Sverige. Kommittén skall utarbeta ett handlingsprogram för ökad sjösäkerhet med speciell inriktning på passagerartransporter med färjor och redovisa en samlad strategi för det svenska agerandet i Europeiska unionen, IMO och i det övriga internationella samarbetet.

Kommittén skall redovisa sitt arbete senast den 1 november 1995.

Med vänlig hälsning

Ines Uusmann

Time schedule of final building phase viking sally

Enclosure 2.4.2.26

Jos. L. Meyer
Schiffswerft - Maschinenfabrik
2890 Papenburg 1
Postfach 1120

Techniplan

Blatt ...^a

Woche 24.

Termin Date	Verantwortlich Responsible	Abnahme Acceptance		Auszuführende Arbeiten work to be carried out
		Klasse Class.	Bauaufz. Build. superv.	
Freitag, 13.6.	Bless RL, MB, RL, Ganea,	X	"	Überfeuerte Hilfskessel in Betrieb nehmen. Heizungsanlage in Betrieb Wärmeabgabe für Maschinen- anlage sicherstellen.
	Wecke, SL, Schl. Bless			Bugklappe betriebsbereit
	Bühl, Schl.	FSS	X	Maschinenraumreinigung Kontrolle aller Rettungs- mittel (Schwimmwesten, Inseln, Rettungsringe Flöße)

Jos. L. Meyer

Schiffswerft - Maschinenfabrik

2990 Papenburg 1

Postfach 1120

Terminplan

Blatt ... 7

W o c h e . 25.

Termin Date	Verantwortlich Responsible	Akzeptanz Acceptance		Aussuführende Arbeiten work to be carried out
		Klasse Class.	Bauaufz. Build. superv.	
H i t t w e c h s . 18.6.1980	Bless NB RL EL Alfa-Laval	BV	X "	Brennstoffseparatoren in Betrieb Spülbetrieb Brennstoff für die Hauptmotore
	Buhl, EL,Ti Buhl,RL,EL,schl.		X	Weckanlage betriebsbereit Scheibenwischer, Scheiben, Scheibenwaschanlage betriebsbereit
	Bless/Stal-astra Buhl,Eissine EL			Klimakompressoren in Betrieb, zentralantennenanlage in Betrieb
	Buhl, Elba, EL			Wechselsprechanlage in Betr.
	Buhl, Teleste ED			Musikanlage in Betrieb
	Bless, RL, EL,Hipress			Einregulieren Klimaanlage
D o n n e r s t 19.6.1980	Bless NB RL			Auffüllen des Kühlwasser- systems Hauptmotor
	Bless,NB, RL,EL,MS	X		Inbetriebnahme Anlaßluftkomp.
	Bless,Eissine NB, EL	X		Inbetriebnahme Ruderanlagen
	Mecke, v.Tell,Schl. FSS	X		Funktionsprobe aller Rändedecks, Seitenpforten, Bug- und Heckrampen, Bugklappe

Jos. L. Meyer

Schiffswerft - Maschinenfabrik

2990 Papenburg 1

Postfach 1120

Terminplan

Blattte ... 9

W o c h e ... 26

"

Termin Date	Verantwortlich Responsible	Abnahme Acceptance		Auszuführende Arbeiten work to be carried out
		Klasse Class.	Reaufs. Build. superv.	
Montag, 23.6.80	Bless,MAN/ RL, MB, EL		"	Kalte Funktionsproben Hauptmotore
	Abrams			Fahrerlaubnisschein SeeBG
				nach Programm Herr Abrams
Dienstag, 24.6.	Bless/Abrams MB,MA,EL,RL	BV	x	Standprobe Hauptmotor
	Rosema,Bless Buhl			Schiffsreinigung Stellagen & Werkzeuge von Bord
Mittwoch 25.6.80	Abrams, Bless/Buhl	BV FSS	x	SchiffsÜberführung nach Enden mit anschließender Probefahrt

6702

NEUERTEINER WEINL

00009 1989 01+02 01:01 26. 10/90

Correspondence von tell AB FBN

Enclosure 2.4.2.27

Translation summary of correspondance between von Tell AB and the Finnish Board of Navigation regarding the ramp and visor installation in MV Viking Sally

Letter dated 1979-12-14 from von Tell AB to Sjöfartsstyrelsen, Helsingfors (the Finnish Board of Navigation)

Attn: The Ship Section

Subject: Approval of drawings, our ref no 4911.1

The Sally shipping company, Mariehamn, is building at Jos. L Meyer, Papenburg, a passenger and car ferry for traffic between Sweden and Finland. This ferry is to be built to Bureau Veritas and your approval.

We have got from the yard in Germany the contract to deliver elevating car decks, ramps for stern and bow, visor and side doors. Identical equipment was delivered to the sister vessel DIANA II that was build in 1979 by Meyer with approval by BV and the Swedish National Maritime Administration.

We would like to be informed about the details for which we should submit drawings for your approval.

We look forward with interest to your early reply.

With kind regards,

Letter dated 27.12.1979 from the Finnish Board of Navigation to von Tell AB, Gothenburg

Subject: Newbuilding at Jos. L Meyer

Regarding the bow and stern ramps, the side doors and the visor we assume that the drawings are examined by Bureau Veritas. Only in case the class is uncertain about how any detail in the Load line and SOLAS conventions is interpreted by the Finnish Administration should drawings be sent to this office.

In such case the problem should be clearly defined in order to facilitate dealing with it. The Board is lacking resources for routine examination of all the drawings required in a modern newbuilding.

Also regarding the elevating car decks do we accept the approval by class unless special questions arise. If it is intended that it should be possible to lift and lower the decks in loaded condition, i.e. with cars, are the devices to be regarded as loading devices and must be approved by the Finnish Board of Labour Safety.

With kind regards,

*Handwritten remark by F.B.N. Ref. Co. 5.
"Sapposetly it is regarding drawings concerning
LL [Load line] questions
As long as we stay within LLquestions, matter
can be dealt with by BV
when it comes to interpretations and/or
exemptions, the approving authority is F.B.N."*

Mölndal-Sweden

Vår datum Our date
1979-12-14 CB/IA
Ert årsd. Your date CB referens/Vour reference

von Tell

von Tell AB

Sjöfartsstyrelsen
Bergmansgatan 1
HELSINGFÖRS
Finland

M.

Att.: Fartygssektionen

Betr.: Godkännande av ritningar
vår ref. nr 4911.1

Rederi AB Sally, Mariehamn bygger vid Jos. L Meyer, Papenburg en passagerar- och bilfärja för trafik mellan Sverige och Finland. Denna färja skall byggas till Bureau Veritas och Ert godkännande.

Vi har av varvet i Tyskland erhållit i uppdrag att leverera höj- och sänkbbara bildäck, ramper i för och akter, visir och sidoportar. Samma utrustning levererade vi till systerfartyget DIANA II som byggts 1979 hos Meyer med godkännande av B.V. och Svenska Sjöfartsverket.

Vi önskar veta på vilka detaljer vi skall överlämna ritningar för Ert godkännande.

Vi avväntar med intresse Er snabba behandling och svar.

Med vänliga hälsningar

von Tell AB

Conny Bryfors
Conny Bryfors

1. Edleham
2. Wierry
(3. Hanteren) ?
1979-12-20
OS.

Kryssat om här är LL.
Lyftaggregatet är flyttat
på lastbilsbord.
Vän hanen hem pågått sedan
varje LL - lyftbord är den lasten B
kan man där lastbordet ja/nej
ge tillbaka, när lyftbordet är KTT.

Postal address:	Office address:	Phone:	Telex:	Teleg.	Bank:	Bank Giro No.
P.O. Box 472 S-412 27 Göteborg 1 Sweden	Göteborgsvägen 17 S-411 21 Mölndal Sweden	411-8700 00	20 611 Mönle	Tellrade	Skandinaviska Kreditbanken, Göteborg	501-3835
						Post Giro No.
						2409 43-4

SJÖFARTSSTYRELSEN

Helsingfors 27.12.1979

Nr KD 3965/79/301

L-1296

von Tell AB
PB 472
S-40127 Göteborg 1
Sverige

ARKISKO

Hämtnings CB/IA

Arende Nybygge f/s Jos.L.Meyer

Beträffande för- och akterramperna, sidoportarna och visiret förutsätter vi att ritningarna i första hand granskas av Bureau Veritas. Endast i det fall att klassen är osäker om hur någon punkt i lastlinje- eller SOLAS-konventionen tolkas av den finska administrationen, skall ritningar sändas till Sjöfartsstyrelsen.

För snabb behandling bör i så fall problemet vara klart beskrivet. Sjöfartsstyrelsen saknar kapacitet för rutinmässig genomgång av allt det ritningsmaterial ett modärnt fartyg förutsätter.

Även beträffande de höj- och sänkbara bildäcken nöjer vi oss med att de godkänns av klassen om icke speciella problem uppstår. Om det dock är meningen att bildäcken skall kunna lyftas och sänkas i lastat tillstånd d.v.s. med bilar på, betraktas de som lastningsanordningar och skall godkännas av arbetskyddsstyrelsen.

Med vänlig hälsning

Byråingenjör Gunnar Edeimann

GE/MS

Lam. 1,44

ADRESS: Bergmansgatan 1
HELSINGFORS 14

POSTADRESS: PB 158

00141 Helsingfors 14
Finland

TELEFON: 90-650411

TELEFAX: 121401 mäh sf

POSTGIROKONTO: 3801-4

Sketch list on drawing 49111-372

MATERIALLISTE

Enclosure 2.4.2.28

POS	BENENNUNG	ANZ	SKIZZE	MATERIAL, TYP
1.	VERSCHLUSSBOLZEN	1	49111-372/1	SIEHE DET.
2.	STEUERGEHÄUSE FÜR VERSCHLUSSBOLZ	1	49111-372/2	ROHR SIS 2172 (ST 52)
3.	VERSCHLUSSRÖHR	1	49111-372/3	"
4.	STEUERGEHÄUSE FÜR SICHERUNGSSTIFT	1	49111-372/4	SIS 1412 (ST 42)
5.	SICHERUNGSSTIFT	1	49111-372/5	SIS 2172 (ST 52)
6.	VERSCHRAUBUNG	1	49111-372/6	SIS 1412 (ST 42)
7.	AUGENBOLZEN	1	49111-372/7	SIS 2172 (ST 52)
8.	ACHSE	2	49111-372/8	SIS 2172 (ST 52)
9.	ACHSE	1	49111-372/9	2321 W.NR. 14057
10.	SCHEIBE	1		Ø 110/50 x 20 F.Z.V.
11.	"	2		Ø 80/51 x 5 F.Z.V.
12.	"	8		Ø 52/31 x 5 F.Z.V.
13.	TELLERFEDER	10		40 x 20,4 x 1 DIN 2093
14.	STEUERSCHRAUBE	2		T 6 SS M10 x 35 F.Z.V.
15.	MUTTER	2		M6M M10 F.Z.V.
16.	"	1		M6M M48 x 5 F.Z.V.
17.	SEEGER RING	4		A 30 x 1,5 DIN 471 F.Z.V.
18.	SPLINT	2		SP 10 x 80 F.Z.V.
19.	SCHMIERNIPPEL	4		DIN 3404 AM 10 x 1 F.Z.V.
20.				

Diese Zeichnung und alle dazugehörigen Teile
dürfen nicht kopiert werden.
Die offizielle Zulassung ist nur gültig, wenn sie
nur nach Dokument-Nr. gezeichnet wurden.
Die unerlaubte Verbreitung und Vervielfältigung
des Dokuments ist strengstens untersagt.

20 NOV 1979

SHIPIARD: JOS. L. MEYER PAPENBURG	OWNER:
SHIP: S 590	DRAWN BY: TK DATE: 79-10-03
CLASS: B.V.	SCALE: 1:10-1:5
<small>This document must not be copied without our written permission, and the contents thereof must not be imparted to a third party nor be used for any unauthorized purpose. Contingent will be prosecuted.</small>	

AUTOMATISCHE UND MANUELLE
VERSCHLUSSANORDNUNGEN
FÜR BUGKLAPPE

vonTeil

49111-372

Sketch list on drawing 49111-373

MATERIALLISTE

Enclosure 2.4.2.29

POS	BENENNUNG	ANZ	SKIZZE	MATERIAL, TYP
1	VERSCHLUSSBOLZEN	1	49111-373/1	SIEHE DET.
2	STEUERGÄNSE FÜR VERSCHL.-BOLT	1	-372/2	ROHR SIS 2172 (ST 5)
3	VERSCHLUSSROHR	1	-373/2	
4	STEUERGÄNSE FÜR SICHERUNGSSTIFT	1	-372/4	SIS 1412 (ST 42)
5	SICHERUNGSSTIFT	1	-372/5	SIS 2172 (ST 52)
6	VERSCHRAUBUNG	1	-372/6	SIS 1412 (ST 42)
7	ACHSE	2	-371/4	SIS 2321 W.NR. 140
8	SCHEIBE	8		Ø 52 / 31 x 5 FZV
9	TELLERFEDER	10		40 x 20,4 x 1 DIN 20
10	STEUERSCHRAUBE	2		T6SS M10 x 35 FZ
11	MUTTER	2		M6M M10 f.z.
12	SEEGER RING	4		A 30 x 15 DIN 471
13	SCHMIERNIPPEL	4		DIN 3404 AM 10 x 1 f

60151-1

'Viking Sally'

20 NOV. 1979

SHIPYARD: JOS. L. MEYER PAPENBURG		OWNER:	
SHIP: 590	DRAWN BY: T.K.	DATE: 79.10.03	
CLASS: B.V.	SCALE: 1:10 / 1:5	ATLANTIKSICHERUNG (UND EINWEISER)	
This document contains confidential information which may not be copied without permission, and the contents thereof must not be imparted to a third party, nor be used for any unauthorized purpose. Contravention will be prosecuted.			
		von Tell	
		49111-373	

Letter BV hamburg to von tell GmbH

Bureau Veritas

Enclosure 2.4.2.30

INTERNATIONALE GESELLSCHAFT FÜR DIE KLASSEIFIKATION
VON SCHIFFEN UND LUFTFAHRZEUGEN SOWIE ABNAHME VON WERKSTOFFEN
UND INDUSTRIEERZEUGNISSEN

BUREAU VERITAS-DZB Hopfenmarkt 33 D 2000 Hamburg 11

von Telk GmbH.
Sophienallee 24
2000 Hamburg 13

DEUTSCHES ZENTRALBÜRO
HOPFENMARKT 33
D 2000 HAMBURG 11

TELEFON 364957-59
TELEGRAMME: BUVER HAMBURG
TELELEX: 2 15 426 BUV D

SECTION No. 35-397
Um Antwortadressen bitte zu wiederholen

Hamburg, den 2 July 1980.

NR. TB 1002

COPIE

Betr.: Neubau 590 der Werft
Jos. L. Naya, Papoubaug.

Ihr Schreiben von 10. April 1980.

Sehr geehrte Herren,

Sie erhalten in der Anlage die nachstehend aufgeführten
Unterlagen mit unserem Sicht - bzw. Genehmigungsvermerk
versehen zurück.

Mit freundlichen Grüßen!

Bureau Veritas
Hamburg

Anlage:

49111-373 Abtaufzeichnung
49111-372 Aut. u. man. Verschluss
für Bugklappe.

Anzahl: je 2 "

Zu beachtende Bemerkungen: 1- vol

cc mit Anlagen: BV Oktaubaug

BANK: DEUTSCHE BANK A.G. HAMBURG, ZWEIGST. MATTENTWIEDE, KTO. 37/09664 (BLZ 20070000)

Von tel manual

M/S "VIKING-SALLY"

OPERATION INSTRUCTIONS
SPARE PARTS SPECIFICATION
HYDRAULIC CYLINDERS

von Ten

Operation instructions for hydraulic and mechanical installations
on board passenger ferry, yard No 590, built at Jos. L. Meyer,
Papenburg, 1980.

The hydraulic and mechanical arrangements are constructed by
VON TELL under manufacturing No 4911.1.

I. STERN RAMP page 4:19 - 6:19

- 1) Construction
- 2) Maintenance
- 3) Load capacity
- 4) Locking device
- 5) Operation
- 6) Control

II. BOW VISOR page 6:19 - 8:19

- 1) Construction
- 2) Maintenance
- 3) Locking device
- 4) Operation
- 5) Control

III. BOW RAMP page 8:19 - 9:19

- 1) Construction
- 2) Maintenance
- 3) Load capacity
- 4) Locking device
- 5) Operation
- 6) Control

IV. HANGING DECK page 9:19 - 11:19

- 1) Construction
- 2) Maintenance
- 3) Load capacity
- 4) Locking device
- 5) Operation
- 6) Control

V. DRIVE-ON RAMPS

page 11:19 - 14:19

- 1) Construction
- 2) Maintenance
- 3) Load capacity
- 4) Locking device
- 5) Operation
- 6) Control

For I.-V. in the operation instructions the position Nos in brackets (.) correspond to the hydraulic scheme 49111-801.

VI. PASSENGER BRIDGE

page 14:19 - 15:19

- 1) Construction
- 2) Maintenance
- 3) Locking device
- 4) Operation
- 5) Control

VII. PASSENGER- AND PILOT DOORS

page 15:19 - 16:19

- 1) Construction
- 2) Maintenance
- 3) Locking device
- 4) Operation
- 5) Control

For VI and VII in the operation instructions the position Nos in brackets (.) correspond to the hydraulic scheme 49111-802.

DRAWINGSSTERN RAMP, BOW VISOR AND BOW RAMP

49111-230, -260, -304, -330, -360, -361, -371, -372, -373

HANGING DECK, DRIVE-ON RAMPS

49111-101, -161, -162, -163, -164

PASSENGER BRIDGE, PASSENGER- AND PILOT DOORS

49111-761, -423, -426, -427, -428

HYDRAULIC

49111- 287, -387, -401, -785, -801, -802, -804, -805, -806,
-821, -822, -823, -824, -825, -826, -827, -828, -830, -831,
-871

- + all the hydraulic cylinders
- + 49111-502 Spare parts spec.

I. STERN RAMP (SB and PS)**1) Construction**

Dimensions: L = 6500 mm
B = 5500 mm between the tracks

Weight: abt 11,5 tons

The fore-end part of the ramp is provided with 9 sloping flaps of 1,5 m length. Any sloping flap can be moved independent from the others in order to level the incline of the ramp to the quay in case of heeling of the ship (2 degrees max.). The ramp is pivoted to the ship with 4 hinges. The two outer hinges are pivoted with spherical bearings and the inner ones with bronze bushes. The axles are of stainless material.

The ramps are provided with fastenings for preventer stays.

2) Maintenance

All bearings without zerk fittings and sloping flaps must be lubricated with engine oil in space of about two weeks.

The cylinder bearing bolts are provided with zerk fittings type DIN 3404 AM 10 x 1. The lubricating point should be lubricated with seawater consistent grease under use of the grease gun in space of every four weeks.

The axles of the ramp bearings are equipped with "automatic" grease filler. The lifetime for these is 5-6 months. Control at regular intervals that the grease fillers are intact and have lubricant.

All piston-rods and cylinders should be covered during painting. Dry paint spirits upon the surface of the piston-rod would spoil the cylinder packings within short time; what means undesirable leakages.

Check all hoses, hose connections and pipe connections to prevent leakages. Damaged components should be replaced if necessary in order to avoid interruption.

The hose connections should be painted, but not the hydraulic hoses.

The rubber packings should be treated with Tellin or similar mixture containing graphite and tallow in order to reduce the wear of the rubber. When a defect rubber packing is going to be replaced the packing channel has to be sufficiently cleaned before the new packing is fitted with glue. von Tell UK 2 glue or glue of the same quality has to be used.

3) Load capacity

The ramp is constructed to carry an axle load of 18 tons at the distance between the axle of 1,3 m and the distance between the wheels of 2,0 m.

The star board ramp is provided with lugs for emergency operations, designed for normal load (axle load of 18 t).

4) Locking device

In closed position the ramp is locked by 3 wedges on each side and 2 hooks on the upper side. The wedges are operated by one hydraulic cylinder (11), on each side and each hook by one hydraulic cylinder (10).

The hooks on the upper side are first pressing the ramp into the rubber sealing frame and then the ramp is locked by the wedges.

The rubber packing is fixed with bolts.

The pressure reducing valves (32) (33) are reducing the pressure on the cleats, and the valves (28) and (29) are controlling the operating sequence of hooks and wedges.

5) Operation

For operation of the ramp, a hand-operated electric valve (17) is used which guides an operating valve (21) and a relief and by-pass valve (16). The operation itself of the ramp is carried out by two hydraulic cylinders (5) with spherical bearings. Two ice-breaking cylinders (8) assist the opening process. When the locking device of the ramp has been released the ice-breaking cylinders (8) are put under pressure to push the ramp outwardly. The ramp continues lowering by sole weight until it rests upon the quay. The control lever remains in lowering position all through the loading process in order to adjust the ramp inclining according to the actual depth of the quay. The lowering speed is adjustable by throttle non-return valves (40) at the cylinders (5). The throttles are to tune on parallel lowering of both sides. For closing the cylinder (5) is put under pressure and the ramp will close. Speed is adjusted by throttle valve (41). When the ramp is fully closed it is locked with hooks and wedges.

For the operation of the hydraulic cylinders for the hooks and the wedges a manual operating valve (24) is used. The speed is adjusted by the throttle valve (41).

The relief and by-pass valve (16) is reducing the pressure if the ramp is not correctly operated and one forgets to set the operating valve on "floating position", when the ramp rests upon the quay.

6) Control

Opening of the ramp

- 1) Start one of the pumps.
- 2) Close the ramp. The control lever will be in UPP position. (The pressure on the wedges is reduced.)
- 3) Open up the cleats. The control lever will be in position UPPNA until red lamp indicates UPPEN.
- 4) Lower the ramp. The control lever will be in position NER until the ramp is resting on the quay. The lever should remain on NER ("floating position") until the ramp will be closed.
- 5) Switch off the pump.

Closing of the ramp

- 1) Start one of the pumps.
- 2) Check that red lamp indicates UPPEN for the cleats. If not; open up the cleats.
- 3) Close the ramp. The control lever in position UPP until green lamp indicates UPPE.
- 4) Close the cleats. The control lever will be in position LASA until green lamp indicates LAST.
- 5) Switch off the pump.

II. BOW VISOR

1) Construction

The visor has a weight of abt 54,5 tons and forms the W.T. front closure of the ship. The bow visor is pivoted at the upper deck. It opens in upward direction.

2) Maintenance

Under circumstances when temperature reaches 0° C or below check that the limit switches and other equipment on weather deck are not getting covered with ice. See also item I pos. 2).

3) Locking device (25)

In closed position the visor is locked by two locking pins which are operated by one hydraulic cylinder (12) each. As a reserve the visor can also be locked by two manually operated locking devices. There is also one hydraulic operated "atlantic locking device" (12).

In open position the bow visor is locked by 2 locking pins which are hydraulic operated with one hydraulic cylinder (12) each.

In closed position the rubber packing is compressed by the sole weight of the bow visor. The rubber packing is fixed with bolts.

4) Operation

For the operation of the bow visor a hand-operated electrical valve (pos 17) is used which is guiding an operating valve (19). An electrical blocking is built in to prevent faulty operation between bow visor and bow ramp.

The very operation of the visor is performed by two hydraulic cylinders (2) with spherical bearings. Two ice-breaking cylinders (8) assist the opening process when the visor starts opening. When the locking devices of the bow visor are released the ice-breaking- and operating cylinders are put under pressure and the visor will open. When the visor is fully opened it will be locked.

When lowering the bow visor the top of the cylinder will be put under pressure. In the bottom of the cylinder a valve (15) is fitted which is controlling the lowering when a pressure arises in the cylinder which is higher than the adjusting pressure of the valve. The lowering speed is adjustable by throttle non-return valves (39) and they should also be so adjusted that the cylinders get the same timing.

5) Control**Opening of the bow visor**

- 1) Start both of the pumps.
- 2) Open the atlantic locking device and the cleats.
Put the control levers (one by one) in position UPNA until red lamp indicates OPEN.

If the manual locking device has been used this has to be opened.

- 3) Check that the lamp for the locking devices indicates OPPEN. If not, open up the locking devices which are locked.
- 4) Open the bow visor. The control lever will be in position UPP until green lamp indicates UPPE.
- 5) Close the locking device. The control lever will be in position LASA until green lamp indicates LAST.
- 6) Lower the bow visor and let it rest on the locking device in order to release the hydraulic pressure in the operating cylinder.
- 7) Switch off the pumps.

Closing of the bow visor

(Check that the bow ramp is closed and locked.)

- 1) Start the pumps.
- 2) Check that red lamp indicates OPPEN for cleats and the atlantic locking device. If not, open up the cleats and the atlantic locking device.
- 3) Open up the bow visor. (The load on the locking device is released.)
- 4) Open up the locking device. Put the control lever on UPPNA until red lamp indicates UPPEN.
- 5) Close the bow visor. The control lever will be in position NER until green lamp indicates NERE.
- 6) Lock the cleats. The control lever will be in position LASA until green lamp indicates LAST.
- 7) If the atlantic locking device is going to be used this should also be locked.
- 8) Switch off the pumps.

III. BOW RAMP

1) Construction

Dimensions: L = 8225 mm
B = 5500 mm between the tracks
Weight: abt 12,1 tons

The fore-end part of the ramp is provided with 8 sloping flaps, which automatically extend when the ramp is opening. Each sloping flap is working independently

from the others in order to compensate for the heeling of the ship (2 degrees max.).

The ramp is pivoted to the ship with 4 hinges. The two outer hinges are provided with spherical bearings and the two inner with bronze bushes. The axles are of stainless steel.

The ramp is equipped with fastenings for preventer stays.

2) Maintenance

See item I. pos. 2).

3) Load capacity

See item I. pos. 4).

4) Locking device

The side cleats consists of 2 hydraulic operated locking pins on each side of the ramp in contrast to the stern ramp which has hydraulic operated wedges. See also the stern ramp (item I).

5) Operation

On the bow ramp an electrical blocking is built in which is preventing faulty operation between bow-visor and bow ramp. The bow ramp has no ice-breaking cylinders similar to the stern ramp. In other respects see the stern ramp (item I).

Note: The bow ramp must not be operated until the bow visor is fully opened and in locked position.

6) Control

See item I pos. 6).

IV. HANGING DECK

1) Construction

The hanging decks are constructed for the transport of passenger cars. They are laid out as installation of raisable car decks. The area of decks consists of all together 8 sections, $L = 6 \times 20\text{ m} + 2 \times 18,4\text{ m}$. The sections at port are $B = 5,5\text{ m}$ - those at star board $B = 8,5\text{ m}$. At star board side the lowered decks rest

upon consols fixed to the ship. At the port side there are fixed supports to the ship side and towards the centre line of the ship hanging standers (folding standers) which can be folded. Lateral guide rollers prevent the decks to be bent out of line when manoeuvring to stowed position under C-deck.

On port side hanging deck there are hand rails mounted between the folding standers. These are automatically folded together with the hanging standers when the deck is lifted up to stowed position.

2) See item I. pos. 2).

3) Load capacity

The decks can be loaded with vehicles with the max. load from each wheel of 400 kg, and be stowed close by close. The axle load of the single axle amount to maximum 800 kg. The star board side has the capacity of 4 lines of vehicles and the port side 2 lines.

4) Locking device (25)

In stowed position the hanging decks rest underneath the C-deck where they are locked by means of hooks which are hydraulic operated by hydraulic cylinders (14).

5) Operation (22)

Each section is suspended to four steel wire-ropes which are fixed to the C-deck. They are led over guide rollers to a hydraulic tackle-block in the hanging deck.

Each deck is furnished with a separate control stand with control valves. Over a control valve the deck can be lifted or lowered. The lifting speed and the opening- and closing speed for the locking hooks are adjustable by the installed throttle (41) at the control stand, while the lowering speed is to be adjusted by the throttle (40) at the cylinder (4) on star board and (7) on port side.

6) Control

Lifting of the hanging deck

- 1) Start one of the pumps (two pumps on P.S.).
- 2) Check that the red lamp indicates OPEN for the locking device. If not, open up the locking device.
- 3) Lift the hanging deck to the stop. The control lever in position UPP.

- 4) Lock the locking device. The control lever will be in position LASA, until a green lamp indicates LAST.
- 5) Lower the hanging deck to the locking arrangement in order to release the wires.
- 6) Switch off the pump.

Lowering of the hanging deck

- 1) Start one of the pumps.
- 2) Lift the hanging deck to the stop. The control lever in position UPP.
- 3) Open up the locking device. The control lever will be in position OPPNA until the red lamp indicates UPPEN.
- 4) Lower the hanging deck down to the consols. The control lever in position NER.
- 5) Switch off the pump.

V. DRIVE-ON RAMPS

1) Construction

The end parts of the hanging decks are equipped with drive-on ramps of length 19,8 m each. In horizontal position the decks are supported by folding supports and folding standers which are automatically folded when the ramps are stowed underneath the C-deck. The supports are manually operated. When the ramp shall be brought into drive-on position from horizontal position the folding standers have to be unshackled. Folding supports for the horizontal position of the ramp are folded away and supports for the lowered position are folded out.

The folding stander for the drive-on position of the port side ramps will always be connected. It is placed on about half the length of the ramp towards the centre line of the ship and is folding in the longitudinal direction.

2) Maintenance

See item I. pos. 2).

3) Load capacity

The decks can be loaded with vehicles with the max. load from each wheel of 400 kg, and be stowed close by close. The axle load of the single axle amount to max. 800 kg. The star board side has the capacity of 4 lines,

and the port side 2 lines of vehicles.

The fully loaded ramps can be hydraulic lifted from drive-on position to horizontal position, where it is locked by folding standers and folding supports.

4) Locking device

See item IV. pos. 4).

5) Operation

For the lifting of the ramp from drive-on position to the horizontal position four points of suspensions are used. The points are connected 2 + 2 with wires, which are guided over a "sledge". The sledge is connected with wires to a hydraulic tackle-block which is placed at the side shell of the ship.

When the ramp is lifted from the horizontal to the stowed position underneath the C-deck the four lifting points mentioned above are used plus 2 more stations at the pivoting end of the ramp.

The control station consists of 3 operation valves:

1 for lifting the loaded ramp from drive-on position to the horizontal position, valve I (22),

1 for lifting the ramp from horizontal position to the stowed position, underneath the C-deck, valve II (22),

1 for the locking of the deck in stowed position (25).

A hydraulic limit switch stops the hydraulic oil to the operation cylinder, when the ramp reaches the horizontal position.

The lifting speed is adjusted by the valve (42) on S.B. (for P.S. it is full pump flow) and the opening- and closing speed of the locking arrangement by valve (41) at the control station. The lowering speed of the ramp is adjusted by a valve (40), which is placed at the bottom of the cylinder (1) S.B. and (3) P.S.

A relief valve (30) is built in, in order to reduce the pressure, when the ramp is lifted up against the C-deck.

6) Control

The lifting of the drive-on ramp from the drive-on position to the horizontal position (star board ramp).

- 1) Start one of the pumps (two pumps on P.S.).
- 2) Check that the folding supports for the horizontal position are free.
- 3) Lift the ramp to the horizontal position. The control lever I in position UPP.
- 4) Connect the folding standers and extend the supports.
- 5) Lower the ramp so that it rests upon the folding standers and the supports. This will release the wires.
- 6) Switch off the pump.

Lowering.

- 1) Start one of the pumps.
- 2) Extend the supports for the inclined position of the ramp.
- 3) Lift the ramp so that the folding standers and the supports will be free. The control lever I in position UP.
- 4) Release the folding standers and the supports.
- 5) Lower the ramp. The control lever I will be in position NER.
- 6) Switch off the pump.

Lifting of the ramp from the horizontal position to the stowed position.

- 1) Start one of the pumps (two pumps on P.S.).
- 2) Fold the hand rails all way round the ramp.
- 3) Check that the folding standers are connected.
- 4) Check that the lamp for the locking arrangement indicates OPEN. If not, open up the locking device.
- 5) Lift the ramp towards the stops. The control lever II in position UPP.
- 6) Lock the locking arrangement. Put the control lever in position LASA until the green lamp indicates LAST.

- 7) Lower the ramp on the locking arrangement. This will release the wires. The control lever II will be in position NER.

8) Switch off the pump.

Lowering

- 1) Start one of the pumps.
- 2) Extend the supports for the horizontal position of the ramp.
- 3) Lift the ramp. The control lever II in position UPP.
- 4) Open up the locking arrangement. Put the control lever in position UPPNA, until red lamp indicates UPPEEN.
- 5) Lower the ramp so that it is resting on the supports and folding standers. The control lever II in position NED.
- 6) Rise the hand rails all round the ramp.
- 7) Switch off the pump.

For the port side ramp the same operation will take part but this ramp has no folding supports in the inclined position.

I. PASSENGER BRIDGE

1) Construction

For passenger traffic between the trunk in centre line and the port side hanging deck there are 2 passenger bridges. The bridges are designed by the yard and have the dimensions L X B = abt 6,2 x 1,2 m.

2) Maintenance

See item I. pos. 2).

3) Locking device (7)

The locking of the passenger bridge in lifted position toward the C-deck is arranged by locking devices at both ends. These are hydraulic operated (3).

4) Operation (11)

The lifting operation is arranged by wires, which are connected to a hydraulic tackle-block underneath the C-deck.

The lifting speed is controlled by the valve (9) and the opening- and closing speed of the locking arrangement by the valve (8). For the lowering speed there is a valve (9) which is situated at the bottom of the cylinder (5).

The pressure is reduced for the lifting cylinder by the valve (12).

5) Control

Lifting and lowering (one pump only)

See hanging deck IV, pos. 6)

I. PASSENGER- AND PILOT DOORS**1) Construction**

The doors are installed on port side and star board side according to the following numbers and dimensions:

Passenger doors 4 pcs 2,5 x 2,0 m
Pilot doors 2 " 1,2 x 2,0 m

The passenger doors are opened in the aft directions and parallel to the ship side. The pilot doors are opened 90 degrees towards the centre line of the ship.

2) Maintenance

See item I, pos. 2).

3) Locking device (6)

The doors are locked to the ship by wedges, which are compressing the rubber packing in order to give a suitable sealing. The wedges are hydraulic operated (4).

4) Operation (6)

The passenger doors are operated by a hydraulic cylinder(1) and a link system, so that the doors will open parallel to the ship side.

The pilot doors are operated by a hydraulic cylinder (2), which gives the opening direction 90 degrees towards the centre line of the ship.

5) ControlOpening of the doors

- 1) Start the pump.
- 2) Release the security for the locking device.
- 3) Open the locking device. The control lever in position ÖPPNA, until red lamp is indicating ÖPPEN.
- 4) Open the doors. The control lever in position ÖPPNA.
- 5) Secure the door.
- 6) Switch off the pump.

Closing of the doors

- 1) Start the pump.
- 2) Check that the red lamp for the locking device indicates ÖPPEN. If not, open the locking device.
- 3) Release the security for the door.
- 4) Close the door. The control lever in position STÅNGA.
- 5) Lock the locking device. The control lever will be on LASA until green lamp is indicating LAST.
- 6) Secure the locking device.
- 7) Switch off the pump.

PUMPSTATIONS

There are 3 pumpstations, 2 big ones and 1 small one. The working pressure for the big ones is about 250 bar and for the small one about 150 bar.

1 big pumpstation is placed in the stern part on star board side and is serving the port side stern ramp, the port side drive-on ramps, the port side hanging decks. Drawing No 49111-804.

1 big pump station in the fore part on port side is serving the bow visor, the bow ramp, the star board stern ramp, the drive-on ramps on star board and the star board hanging decks. Drawing No 49111-805.

1 small pumpstation placed in the midship trunk is serving 2 pilot doors, 4 passenger doors and 2 passenger bridges on port side. Drawing No 49111-806.

The big pumpstations consist of 1 oil tank each containing 900 ltrs. The tanks should be filled up to the maximum level only, to be able to receive oil from the other system by emergency operation.

In the pumpstation there are 3 pumps. Normally when the system is operating only two pumps, sometimes only one, should be in service. If the system is served by two pumps instead of one, this will make no difference in capacity as volume limiting valves will protect the hydraulic components. The only disadvantage is that the oil will be warm quicker.

All the pumps should be regularly changed so that all pumps will be frequently used in service. The third pump should be used as a reserve if one of the other pumps is out of order.

The hydraulic system is connected parallelly and the pumps are pressure compensated axial piston pumps which deliver only that quantity of oil requiring on every occasion. Required quantity at every user is adjusted with throttle valves. The max. working pressure of the pumpstation is adjusted on the valve (17); this valve is adjusted at delivery and must afterwards not be altered. The valve (18) is a safety valve which is normally not in function but only comes into effect when the pressure exceeds the valid max. working pressure.

The pumpstation is equipped with a level control unit which protects the pumps from breaking down, if the oil reaches a level which is too low.

At the aft pumpstation there is a hydraulic lift connected.

For position No. in brackets () see drawings Nos 49111-804, -805.

The small pumpstation consists of 2 pumps and an oil tank containing 150 ltrs. Normally when the system is operating one pump is working and the other is used as a reserve.

The hydraulic system is connected parallelly. In order to reduce the pressure in the system, when no item is to be served, a hydraulic relief valve (11) will make the oil circulate to the tank. To stop the valve from opening and closing too frequently an accumulator (17) is connected. To reduce the pressure completely, for instance when repairing, a shut-off valve (17) will be opened.

For position No. in brackets () see drwg No 49111-806.

For the service and maintenance of the accumulators see the recommendations from the manufacturer.

Hydraulic oil

Check the oil level of the tank in regular intervals.

Check also the oil cleaner in regular intervals to protect from interruption of the service. Dismantle the filter to check that the filter is intact.

Check the oil in regular intervals and change it according to the recommendations from the oil supplier.

Use NYNKS TD-17 HVX (Visga 22).

Oil from different manufacturers may not be mixed.

When the filter has to be changed, it is of great importance to be careful when refilling or repairing the system in order to prevent dirt in the hydraulic system.

Emergency, "cross-over", for the big pump stations only

If a pumpstation is put out of operation the other pumpstation can be connected. The two shut-off valves (Avstängningsventiler för "Cross-over körning", orange coloured) of the pumpstation which do not work will then be switched off. Then the "cross-over" between the two hydraulic systems will be opened by the two shut-off valves (Huvudventiler för "Cross-over körning", orange coloured) which are situated in the aft pumpstation, drwg No. 49111-804. The operating time will be slightly longer, if the pumpstation aft is used to serve the forward system. This is valid for the bow visor and drive-on ramps on S.B.

Check the oil level in the tank carefully. Before the pumpstation which broke down, is going to be used again, the items which were reserved before the breaking down, should be in the same positions again in order to put the oil levels of the tanks back to normal. Before going back to normal service don't forget to reset all the shut-off valves for the "cross-over".

~~von Tell~~

19:19

SPARE PARTS

When ordering spare parts the following data must be specified:

- 1) The name of the ship: M/S "VIKING-SALLY"
- 2) Yard and newbuilding No.: Jos. L. Meyer, Papenburg, No. 590
- 3) Number, symbol and drawing No.
- 4) Delivery address.
- 5) Delivery time.

von Tell GmbH
Sophienallee 24
D-2000 HAMBURG 19
West Germany

Tel.: 040/493755
Telex: 02 14277 erokg d
Telegram: Erottmann Hmb

Scandinavia

von Tell AB
Box 472
S-401 27 GÖTEBORG
Sweden

Tel.: 031/870500
Telex: 20617 vontell s
Telegram: Telltrade

Great Britain

von Tell (U.K.) Co Ltd
Aldwych House
Aldwych
LONDON WC2B 4EL

England
Tel.: 01-404-0755
Telex: 8952161 ajcoul g
Telegram: Agenticum London

Benelux

von Tell B.V.
Postbus 30061
3001 DA ROTTERDAM
Holland

Tel.: 010/126267
Telex: 21565 tbg nl
Telegram: Grenhuis



Request for classification

DESCRIPTION OF THE SHIP

Hull No. or Ship's Name	S 590	Flag	SP	
Owner's Name	A-B SALLY, MARINHAM, FINLAND.			
Shipyard's Name	JOS. L. MEYER 122 / 1971 GERMANY			
Schedule (1) Keel laying	Launching	3 - 80	Delivery	6 - 80
HULL				
Length (BH)	137,4 m	Breadth (M)	24,20 m	
Depth (M)	7,65 m	Draught	5,55 m	
Gross Tonnage (approx.)	<u>Leergew. 268t</u>	Deadweight (MT or LT)	<u>592t</u>	
Type of Ship	Passenger- and car ferry			
PROPELLER MACHINERY	Material hull - steel			
No. Type, Model and Licence	4 x 8 L 40/45, je 4400 kW built by MAN, Augsburg			
No. Type, Model and Licence	I 32 Diesel 2600 kw class I			
Total power	17.600	KW (23936 BHP) at	600/188,5 rpm	
Number of tailshafts	2	Number of screw propellers	2	
AUXILIARY MACHINERIES				
No. Type, Model and Licence	4 x 6 S 28 LH, je 1104 kW built by B + W, Holeby/DK			
No. Type, Model and Licence	I 32 Diesel 2600 kw class I			
No. Type, Model and Licence	I 32 Diesel 2600 kw class I			
Total power	4416	KW (6000 BHP) at	750 rpm	
ELECTRIC INSTALLATION				
No. and Type of Generator	XIV/100 kVA - 400V - 50Hz - 3 phases			
BOILER				
Main. No.	Type	Boiler type		
Pressure (bar)	Heating Surface (m ²)	Steam Production (t/h)		
Auxiliary. No.	Type	Thermalöl-Kesselanlage 2 x 8lgef. je 2.800 Mcal/h		
Pressure (bar)	Heating Surface (m ²)	Steam Production (t/h)		
RMC:				
AUT:	(AUT)			

Certificates to be issued by the Society (on behalf of National Authorities):

Loadline:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Other:	<input type="checkbox"/>								
Statutory	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Safety Construction	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Safety Equipment	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Safety Radio	<input type="checkbox"/>	Other:	<input type="checkbox"/>
Tonnage	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	National	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Suez canal	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Panama canal	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Cargo Gear documents	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Please fill in the "minimum information required" for data processing

10

Application for an international freeboard certificate



BUREAU VERITAS Enclosure 2.4.3.33

INTERNATIONAL REGISTER FOR THE CLASSIFICATION OF SHIPPING AND AIRCRAFT

APPLICATION FOR AN INTERNATIONAL FREEBOARD CERTIFICATE OR FOR AN INTERNATIONAL LOAD LINE EXEMPTION CERTIFICATE WITHIN THE SCOPE OF THE INTERNATIONAL CONVENTION ON LOAD LINES, 1966

The undersigned, owner (1) of the vessel described below, hereby applies to the Administration of BUREAU VERITAS for an international freeboard certificate with (1) the special marks for the stowage of timber deck cargo:

Name of ship (1) : S. 590 "VIXING SALLY"

Owned by (1) : Rederi A.B. Sally, Mariehamn, Finland

Port of Registry : Mariehamn, Finland

Classification : class symbols: T 3/3 *
Marks and notations: Ferry-Sea - Ica A

Length (L) measured in compliance with Article 2 (8) : 138.13 m

Type of ship (1) : type A, type B, type B with reduced freeboard, type B with increased freeboard.

The Certificate is to be set up in compliance with Attachment 1 or with Article 6 of the International Convention on Load Lines, 1966.

The documents listed overleaf are appended to the present application.

The undersigned undertakes to comply with the «General Conditions of BUREAU VERITAS» as quoted below.

Place, date and signature :

Papenburg, 21st April 1980
Jos. L. Meyer
M. J. Blaauw

Section No.: 35387

GENERAL CONDITIONS OF BUREAU VERITAS.

ARTICLE I. — Bureau Veritas is a Society created for the purpose of underwriting the Classification of Ships, of all kinds, and the Inspection of ships and equipment, as well as inspection and survey reports of construction of Buildings and General Civil Engineering.

Bureau Veritas publishes General Regulations, Instructions and Classification Rules, and Certificates, Attestations, Reports or similar Documents which result from its intervention.

ARTICLE II. — Requests for interventions shall, as a rule, be submitted in writing. They entail, for the requesting party, the obligation to comply with the Regulations published by Bureau Veritas, as well as the payment of the fees, except for specific cases where the fee may be waived and the acceptance without reservation, of the present General Conditions and of any special conditions which may be attached thereto.

Bureau Veritas alone is qualified to apply and to interpret its own Regulations.

Any reference to these Regulations, emanated with their application is strictly forbidden and does not imply the intervention of Bureau Veritas, which is however bound by the said regulations.

ARTICLE III. — Bureau Veritas does not act as Underwriter, Consulting Engineers, Architects or Naval Architects, nor as Builder or Contractor, and cannot assume the responsibilities inherent to such functions. It can, however, act as a technical advisor in all questions concerning matters not covered by its own Regulations. Also it cannot act in substitution for Constructional or Engineering Works or Contracts, nor in the execution of such works. In case of any dispute concerning the intervention of Bureau Veritas, nor can the Society act in lieu of the competent National Authority, even where legal texts make reference by name or not, to Bureau Veritas.

(1) delete where not applicable.

Mod Ad E 542 a - 5000-1-74

The interventions of Bureau Veritas, carried out either in accordance with its own Regulations or according to standards, specifications or similar documents explicitly called for, or otherwise, will be made in accordance with the instructions given by the requesting party. Certificates, Attestations, Reports or similar documents, shall not in any case, involve the responsibility of the Society.

Although the utmost care is taken in the drafting of the documents, Bureau Veritas declines any responsibility for errors or omissions which may be found therein, or in the Certificates, Attestations, or Reports drawn up by its staff, or by the parties concerned, which shall not in any case, involve the responsibility of the Society.

Bureau Veritas declines any responsibility for errors of judgment, mistakes or negligence which may be committed by its staff, or by the parties concerned, in the drawing up, the preparation of each documents and in the performance of the interventions which they cover; nor shall the responsibility of the staff be involved.

ARTICLE IV. — Any intervention by representatives of Bureau Veritas, whatever may be the nature of the same, shall be subject to the payment of expenses, whether or not the payment of fees in accordance with the importance of the services rendered, and the reimbursement of expenses incurred.

The attribution of the corresponding marks, the duty in the Registration of Certificates, Attestations and Reports or similar documents, as well as the acceptance of the corresponding invoices.

ARTICLE V. — Should a technical disagreement arise between the requesting party and the Representatives of Bureau Veritas the Administration may, at the request of the interested party, submit the matter to an Expert.

ARTICLE VI. — All disputes shall come under the exclusive jurisdiction of the Courts of Justice, save in the case of an appeal under a guarantee, or of force majeure, in which case the intervention site or the case of a plurality of defendants.

APPENDED DOCUMENTS (2)

1-fold Freeboard-Report

6-fold Draw. 02/2

6-fold Draw. 02/3

6-fold Draw. 02/6

6-fold Draw. 02/19

6-fold Draw. 61/1

6-fold Draw. 61/3

(2) For a newbuilding, a drawing is to be appended to the present application showing the principal dimensions of the ship as well as the basic data needed for the calculation of the preliminary freeboard. Additional information may be obtained through BUREAU VERITAS Surveyors regarding this drawing.

For a type A ship or for a type B ship with reduced freeboard, a special questionnaire entitled « Data required for the study of subdivision and stability after damage » is to be appended to the present application. The questionnaire may be obtained through BUREAU VERITAS Surveyors.

Where a ship is to carry special marks for timber deck cargo, a drawing showing the stowage arrangements for the timber deck cargo is to be further appended to the present application.

Extract of BV rules 1977 in force 1980

16 - It is recommended to protect side doors against shocks which can result of cargo misstowage (for instance by use of a net or cables). To be efficient, protection devices is to be at so me distance of the door.

2 - Bow and stern doors

21 - When the ship is equipped with a bow door, to allow access to garage, the collision bulkhead must have a removable part. This design is acceptable only above freeboard deck and only if the removable part has a watertightness and a strength equivalent to those of fixed rule bulkhead.

A movable access ramp may be used for this purpose.

22 - Scanlings of plating and stiffeners of a bow door is to be equivalent to those of adjacent shell structure.

23 - Thickness of a stern door plating is not to be less than:

$$e = 4,75E\sqrt{h}$$

Section modulus of stiffeners is not to be less than:

$$W = 7,7hE^2$$

where value of h is calculated in 11-42.25.

24 - If stern door is used as access ramp for vehicles, it has also to be checked that scanlings of plating and stiffeners comply with rules of 11-43.

3 - Securing of doors

31 - Decks and screen-doors have to be firmly secured by use of cleats conveniently spaced or other similar devices.

Particularly, it has to be provided one of these devices at each corner of opening.

Structure reinforcements have to be realised on door and adjacent shell plating to attached points of cleats, hinges, jacks, etc.

32 - If door opens to inside of ship, securing devices have to be scanned in way to resist at a load height, in metres, equal to value calculated in 11-42.2.

- 13 -

BV list of drawings concerning viking sally

3SP387 DRAWINGS LIST

DRWG N°	HULL N°	DRWG DATE	TITLE	REVIEW	DATE	LOCATION
021	590	28.05.1952	GENERAL ARRANGEMENT			MEYER
49 111 201	590	28.09.1978	HECKRAMPE B.B.	APP/PROUVE	05.11.1979	HAMBURG
49 111 202	590	01.10.1978	HECKRAMPE ST.B. (MIT NOTSETZTUGUNGSAUFE)	APP/PROUVE	01.10.1979	HAMBURG
49 111 203	590	28.09.1978	DETAILS FÜR HECKRAMPE ST.B UBB	APP/PROUVE	05.11.1979	HAMBURG
49 111 204	590	04.10.1978	DETAILS FÜR HECKRAMPE (VON TELL LIEFERUNG WO NICHTS ANDERS GESETZ)	APP/PROUVE	04.10.1979	HAMBURG
49 111 205	590	27.09.1978	HYDRAULISCHE VERSICHERUNGSANORDNUNG HECKRAMPE ST	VU	05.11.1979	HAMBURG
49 111 206	590	27.09.1978	HYDRAULISCHE VERSICHERUNGSANORDNUNG HECKRAMPE ST	VU	05.11.1979	HAMBURG
49 111 413	590	05.10.1978	SHELL PORT FOR PILOT	APP/PROUVE	05.11.1979	HAMBURG
49 111 420	590	30.11.1978	ERCTION OF PILOT PORT WITH HYD.JACK	VU	05.11.1979	HAMBURG
49 111 427	590	23.11.1978	HYD. SECURING CLEAT ARR. FOR PILOT SHELL PORT	VU	05.11.1979	HAMBURG
49 111 412	590	28.08.1978	SHELL PORT FOR PASSENGER	APP/PROUVE	05.11.1979	HAMBURG
49 111 426	590	30.09.1978	ARR. OF HYDRAULIC SECURING CLEAT FOR PASSENGER SHELL PORT	VU	05.11.1979	HAMBURG
32841	590	29.05.1978	HAKEN	VU	05.11.1979	HAMBURG
1321	590	11.09.1978	DOPPELBOODEN SPT.23-32	APP/PROUVE	06.11.1979	HAMBURG
1322	590	11.09.1978	DOPPELBOODEN SPT.33-43	APP/PROUVE	07.11.1979	HAMBURG
1323	590	11.09.1978	DOPPELBOODEN SPT.43-53	APP/PROUVE	08.11.1979	HAMBURG
1324	590	11.09.1978	DOPPELBOODEN SPT.53-63	APP/PROUVE	08.11.1979	HAMBURG
1325	590	11.09.1978	DOPPELBOODEN SPT.63-75	APP/PROUVE	08.11.1979	HAMBURG
1323	590	11.09.1978	DOPPELBOODEN SPT.78-00F	APP/PROUVE	08.11.1979	HAMBURG
1334	590	20.08.1978	DOPPELBOODEN SPT.450-400	APP/PROUVE	09.11.1979	HAMBURG
1355	590	25.09.1978	DOPPELBOODEN SPT.107-08	APP/PROUVE	09.11.1979	HAMBURG
1341	590	16.09.1978	DOPPELBOODEN SPT.87-97	APP/PROUVE	09.11.1979	HAMBURG
1342	590	18.09.1978	DOPPELBOODEN SPT.98-108	APP/PROUVE	09.11.1979	HAMBURG
1343	590	18.09.1978	DOPPELBOODEN SPT.109-119	APP/PROUVE	09.11.1979	HAMBURG
1321	590	27.09.1978	DOPPELBOODEN SPT.120-135	APP/PROUVE	09.11.1979	HAMBURG
1352	590	11.09.1978	HAIFMASCHEN HAUPTMOTOR	APP/PROUVE	09.11.1979	HAMBURG
1321	590	11.09.1978	FUNDAMENT HAUPTMOTOR	APP/PROUVE	09.11.1979	HAMBURG
1221	590	15.10.1978	QUERSCHOTT SPT.33	APP/PROUVE	09.11.1979	HAMBURG
1222	590	13.09.1978	QUERSCHOTT SPT.43	APP/PROUVE	09.11.1979	HAMBURG
1223	590	13.09.1978	QUERSCHOTT SPT.53	APP/PROUVE	09.11.1979	HAMBURG
1331	590	13.09.1978	QUERSCHOTT SPT.71	APP/PROUVE	09.11.1979	HAMBURG
1372	590	04.10.1978	QUERSCHOTT SPT.405E/B0H UND LANGSSCHOTT 6900A M.SPT.80E-B0H	APP/PROUVE	09.11.1979	HAMBURG
1033	590	04.10.1978	QUERSCHOTT 85R	APP/PROUVE	09.11.1979	HAMBURG
1344	590	04.10.1978	QUERSCHOTT SPT.45	APP/PROUVE	09.11.1979	HAMBURG
1441	590	22.09.1978	QUERSCHOTT SPT.43	APP/PROUVE	09.11.1979	HAMBURG
1442	590	03.10.1978	QUERSCHOTT SPT.110	APP/PROUVE	09.11.1979	HAMBURG
1443	590	02.10.1978	QUERSCHOTT SPT.120	APP/PROUVE	09.11.1979	HAMBURG
1526	590	18.10.1978	A-DICK SPT.43-43	APP/PROUVE	14.12.1979	HAMBURG
1534	590	15.10.1978	A-DICK V. SPT.54-64	APP/PROUVE	14.12.1979	HAMBURG
1535	590	17.10.1978	A-DICK VON SPT.63-75	APP/PROUVE	14.12.1979	HAMBURG
1431	590	12.09.1978	AUBERHAUT V. SPT.54-64 V. DOPPELBÖTEN A-DICK	APP/PROUVE	14.12.1979	HAMBURG
1432	590	13.09.1978	AUBERHAUT VON SPT.65-75 VON DOPPELBÖTEN BIB A-DICK	APP/PROUVE	14.12.1979	HAMBURG
1523	590	20.10.1978	ZWISCHENDECK SPT.43-54	APP/PROUVE	14.12.1979	HAMBURG
1531	590	14.09.1978	ZWISCHENDECK SPT.54-64	APP/PROUVE	14.12.1979	HAMBURG
1522	590	14.09.1978	ZWISCHENDECK SPT.65-75	APP/PROUVE	14.12.1979	HAMBURG
1212	590	18.09.1978	ZWISCHENDECK SPT.65-75	APP/PROUVE	14.12.1979	HAMBURG
1524	590	20.10.1978	A-DICK VON SPT.33-42	APP/PROUVE	14.01.1980	HAMBURG
1525	590	17.09.1978	A-DICK VON SPT.33-42	APP/PROUVE	21.12.1979	HAMBURG
1558	590	18.09.1978	A-DICK VON SPT.73-65F	APP/PROUVE	21.12.1979	HAMBURG

DRWG H ⁺	HULL N ⁺	DRWG DATE	TITLE	REVIEW	DATE	LOCATION
1535	590	02.10.1979	A-DECK VON SPT 360-66	APPROVE	18.11.1979	HAMBURG MEYER
1544	590	10.10.1979	A-DECK VON SPT 37-87	APPROVE	18.11.1979	HAMBURG MEYER
1545	590	12.12.1979	A-DECK SPT 31-105	APPROVE	18.11.1979	HAMBURG MEYER
1548	590	20.10.1979	A-DECK VON SPT 103-119	APPROVE	18.11.1979	HAMBURG MEYER
1552	590	07.11.1979	A-DECK SPT 120-135	APPROVE	14.01.1980	HAMBURG MEYER
1521	590	30.10.1979	ZWISCHENDECK SPT 24-32	APPROVE	14.01.1980	HAMBURG MEYER
1525	590	29.10.1979	ZWISCHENDECK V. SPT 53-42	APPROVE	21.12.1979	HAMBURG MEYER
1533	590	29.10.1979	ZWISCHENDECK SPT 57-60F	APPROVE	21.12.1979	HAMBURG MEYER
1537	590	22.09.1979	ZWISCHENDECK SPT 250-300	APPROVE	18.11.1979	HAMBURG MEYER
1541	590	04.10.1979	ZWISCHENDECK SPT 57-97	APPROVE	18.11.1979	HAMBURG MEYER
1542	590	09.10.1979	ZWISCHENDECK SPT 108-119	APPROVE	18.11.1979	HAMBURG MEYER
1551	590	03.11.1979	ZWISCHENDECK V. SPT 120-138 KOFFERDAMM DECK V. SPT.120-133	APPROVE	14.01.1980	HAMBURG MEYER
590 557 1	590	22.11.1979	5. DECK (DECK)	APPROVE	18.01.1980	HAMBURG AG "WESER"
590 557 2	590	09.10.1979	6. DECK (DECK)	APPROVE	18.01.1980	HAMBURG AG "WESER"
590 557 3	590	28.11.1979	7. DECK (DECK)	APPROVE	18.01.1980	HAMBURG AG "WESER"
590 557 4	590	24.11.1979	8. (DECK)	APPROVE	19.01.1980	HAMBURG AG "WESER"
590 557 5	590	13.09.1979	9. (DECK)	APPROVE	11.01.1980	HAMBURG AG "WESER"
590 557 1A	590	20.11.1979	AUßENHAUT 42 DECK SPT 6-75 1/2	APPROVE	18.01.1980	HAMBURG AG "WESER"
590 551 2	590	1979	AUßENHAUT 42 DECK SPT.75 172-139	APPROVE	18.01.1980	HAMBURG AG "WESER"
1421	590	12.09.1979	AUßENHAUT SPT 23-52	APPROVE	18.01.1980	HAMBURG AG "WESER"
1422	590	22.10.1979	AUßENHAUT V. SPT.33-43 V. DOPPELBODEN BIS A-DECK	APPROVE	21.12.1979	HAMBURG MEYER
1423	590	13.09.1979	AUßENHAUT SPT.43-53 VON TANKDECK BIS A-DECK	APPROVE	21.12.1979	HAMBURG MEYER
1423	590	13.09.1979	AUßENHAUT V. SPT.55F V. DOPPELBODEN BIS A-DECK	APPROVE	21.12.1979	HAMBURG MEYER
1426	590	21.09.1979	AUßENHAUT V. SPT.500-59 V.DOPPELBODEN BIS A-DECK	APPROVE	29.11.1979	HAMBURG MEYER
1441	590	29.11.1979	AUßENHAUT VON SPT.67-97 VON DOPPELBODEN BIS A-DECK	APPROVE	29.11.1979	HAMBURG MEYER
1442	590	15.09.1979	AUßENHAUT SPT.93-108 VON TANKDECK BIS A-DECK	APPROVE	29.11.1979	HAMBURG MEYER
1443	590	15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	29.11.1979	HAMBURG MEYER
1451	590	18.09.1979	AUßERBAUT SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	14.01.1980	HAMBURG MEYER
584 289		24.10.1978	KA-ME WA - STEUERPROPELLER 200/24-C/P726KIV - 1650/AS-CP595KIV INSTALLATION	VU	09.04.1980	HAMBURG K.M.W.
F002 200-1/2		05.05.1978	KA-ME WA - STEERING PROPELLER 1650IAS - CP595KIV SAMMANSTÄLLNING ASSEMBLY	VU	09.04.1980	HAMBURG K.M.W.
F002 200-2/2		05.05.1978	KA-ME WA - STEERING PROPELLER 1650IAS - CP595KIV SAMMANSTÄLLNING ASSEMBLY	VU	09.04.1980	HAMBURG K.M.W.
909 297		03.10.1977	WELDING OF PROPELLER UNIT	APPROVE	09.04.1980	HAMBURG K.M.W.
57485-1/2		11.11.1978	STEERING PROPELLER	VU	09.04.1980	HAMBURG K.M.W.
590 550-02		03.09.1976	STEERING PROPELLER	VU	09.04.1980	HAMBURG K.M.W.
590 551-01		12.02.1978	STEERING PROPELLER UNIT	APPROVE	09.04.1980	HAMBURG K.M.W.
590 551-02		17.10.1979	FRONTWARD PROPELLER	APPROVE	15.02.1980	HAMBURG K.M.W.
590 551-03		17.10.1979	REARWARD PROPELLER	APPROVE	15.02.1980	HAMBURG K.M.W.
590 551-04		14.11.1979	OUTERSCHOTT SPT.122-133 TANKLAGNSWAND V. SPT.120-132	APPROVE	15.02.1980	HAMBURG K.M.W.
1441	590	19.11.1979	EINBAUVANDE A. D. TANKDECK	APPROVE	15.02.1980	HAMBURG K.M.W.
1422	590	03.01.1978	EINBAUVANDE AUF DEM ZWISCHENDECK SPT.22-133	APPROVE	15.02.1980	HAMBURG K.M.W.
1412	590	14.11.1979	AUßENHAUT A-C-DECK SPT 2 BIS 68	APPROVE	15.02.1980	HAMBURG K.M.W.
1444	590	20.11.1979	AUßENHAUT SPT.57-158 A-BIS C-DECK	APPROVE	15.02.1980	HAMBURG K.M.W.
1411	590	17.09.1979	HINTERSCHIFF HINTEN SPT.9	APPROVE	18.04.1980	HAMBURG MEYER
590 551 1C	590	10.12.1979	4. (C-) DECK	APPROVE	05.05.1980	HAMBURG AG "WESER"
1030	590	17.04.1978	VERSTÄNGH. UNT. 4. DECK	APPROVE	05.05.1980	HAMBURG AG "WESER"
1423	590	03.10.1979	SCHÄCHTVANDE AUF DEM A-DECK VON SPT.23-64	APPROVE	05.05.1980	HAMBURG MEYER
1443	590	03.11.1979	SCHÄCHTVANDE AUF DEM A-DECK VON SPT.65 BIS 86	APPROVE	05.05.1980	HAMBURG MEYER
1411	590	11.11.1979	SCHÄCHTVANDE AUF DEM A-DECK VON SPT.67-120	APPROVE	05.05.1980	HAMBURG MEYER
1411	590	11.12.1979	HINTERSCHIFF SPT.2 BIS HINTEN VON A-DECK BIS C-DECK	APPROVE	05.05.1980	HAMBURG MEYER

DRWG N ⁺	HULL N ⁺	DRWG DATE	TITLE	REVIEW	DATE	LOCATION
1028	590	24.09.1979	STUTZENPLAN	VU	02.07.1980	HAMBURG MEYER
1003	590	30.01.1979	AUßENHAUTABWICKLUNG	APPROVE	25.08.1979	HAMBURG MEYER
1022	590	16.06.1980	STAHLPLAN D-8-I-IG-DECK	APPROVE	25.06.1980	HAMBURG MEYER
1023	590	16.06.1980	STAHLPLAN TD, A-8-IG-DECK	APPROVE	25.06.1980	HAMBURG MEYER
1413	590	15.09.1979	RÜDERSCHAFT FINGERLÖCHER	APPROVE	18.04.1980	HAMBURG MEYER
1420	590	30.10.1979	RÜDERSCHAFT FINGERLÖCHER UND RÜBECHT	APPROVE	18.04.1980	HAMBURG MEYER
11119445		25.05.1983	STRUCTURAL ARRANGEMENT (WV200)	APPROVE	05.05.1983	CORPORATION BROWN BROTHERS
1451		18.09.1979	AUßENHAUT SPT.120-135 V. TANKDECK BIS A-DECK	APPROVE	18.01.1980	HAMBURG MEYER
1442		15.09.1979	AUßENHAUT SPT.52-168 VON TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1441		28.11.1979	RÜDERSCHAFT FINGERLING UND RÜBECHT	APPROVE	28.11.1979	HAMBURG MEYER
1420		09.05.1983	STRUCTURAL ARRANGEMENT (WV200)	APPROVE	17.04.1980	HAMBURG MEYER
1451		21.09.1979	AUßENHAUT V. SPT.55-68 V. DOPPELBODEN BIS A-DECK	APPROVE	18.01.1980	HAMBURG MEYER
1442		15.09.1979	AUßENHAUT V. SPT.55-68 VON TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1443		15.09.1979	AUßENHAUT V. SPT.119	APPROVE	28.11.1979	HAMBURG MEYER
1450		21.09.1979	AUßENHAUT V. SPT.120-135 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1423		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1424		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1425		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1426		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1427		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1428		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1429		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1430		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1431		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1432		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1433		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1434		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1435		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1436		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1437		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1438		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1439		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1440		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1441		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1442		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1443		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1444		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1445		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1446		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1447		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1448		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1449		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1450		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1451		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1452		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1453		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1454		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1455		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1456		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1457		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1458		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1459		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1460		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1461		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1462		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1463		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1464		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1465		15.09.1979	AUßENHAUT V. SPT.120-138 V. TANKDECK BIS A-DECK	APPROVE	28.11.1979	HAMBURG MEYER
1466		15.09.1				

DRYG N°	HULL N°	DRAW DATE	TITLE	REVIEW	DATE	LOCATION
MA 515	590	22.10.1979	DRAGRAAF COOLING WATER SYSTEM	APPROUVE	27.11.1979	PARIS MEYER
MA 512	590	22.10.1979	DRAGRAAF OF SEPARATOR PLANT	APPROUVE	27.11.1979	PARIS MEYER
B11.70110.4036			HALBFARUKAT PRE-PRODUCT SCHWINGRAD FLYWHEEL	VU	15.11.1979	HAMBURG M.A.H.
B11.70110.5344		17.10.1978	SCHWINGRAD FLYWHEEL	VU	15.11.1979	HAMBURG M.A.H.
B11.244.56.0016		18.10.1978	SCHWINGRADANORDNUNG ARRANGEMENT OF FLYWHEEL	APPROUVE	15.11.1979	HAMBURG M.A.H.
MA 561	590	11.09.1979	LINIE SHIFTING	APPROUVE	12.10.1979	HAMBURG MEYER
MA 294	590	20.09.1979	SHAFTING	APPROUVE	06.11.1979	HAMBURG K.M.W.
23065 D		02.10.1979	FLANSCHWELLE TYPE DIDB 140-G5D	VU	29.10.1979	PARIS A.VAN KAICK
590		15.10.1979	RUDERSCHAFTS UND FINGERLINGS ABDICHTUNG	APPROUVE	17.04.1980	HAMBURG MEYER
590		15.10.1979	RUDERSCHAFTS UND FINGERLINGS ABDICHTUNG	APPROUVE	18.04.1980	HAMBURG MEYER
590		20.10.1979	RUDERSCHAFT FINGERLINGS UND ZUBEHOR	APPROUVE	18.04.1980	HAMBURG MEYER
1211	590	17.09.1979	HINTERSCHEIFFRÄTEN SPITZ	APPROUVE	18.04.1980	HAMBURG MEYER
531.398		09.02.1972	KAMEVIA STEERING PROPELLER 1650AS-CP	APPROUVE	08.04.1980	HAMBURG K.M.W.
531.4749 1/2		11.11.1979	KAMEVIA STYRPROPELLER 1650-2000AS-CP	VU	08.04.1980	HAMBURG K.M.W.
531.4749 1/2		03.12.1978	KAMEVIA STYRPROPELLER 1600-2000AS-CP	VU	08.04.1980	HAMBURG K.M.W.
900 297		03.10.1977	WELDING OF PROPELLER UNIT	APPROUVE	09.04.1980	HAMBURG K.M.W.
900 295-1/2		05.05.1978	KA ME WA - STEERING PROPELLER 1650AS - CP/590KV SAMMANSTALLNING ASSEMBLY	VU	09.04.1980	HAMBURG K.M.W.
900 295-2/2		05.05.1978	KA ME WA - STEERING PROPELLER 1650AS-CP/590KV SAMMANSTALLNING ASSEMBLY	VU	09.04.1980	HAMBURG K.M.W.
531.398		24.10.1979	KA ME WA - STEUERPROPELLER 2000AS-CP/730KV 1650AS-CP/590KV INSTALLATION	VU	09.04.1980	HAMBURG K.M.W.
33-03.500 5/10	590	11.09.1979	ELECTRIC SCHEM W.T. DOOR SYSTEM	APPROUVE	04.02.1980	PARIS SCHOENROK-HYDRAULIK
33-03.500 2/10	590	20.11.1979	ELECTRIC SCHEM W.T. DOOR SYSTEM	APPROUVE	04.02.1980	PARIS SCHOENROK-HYDRAULIK
33-03.500 3/10	590	28.11.1979	ELECTRIC SCHEM W.T. DOOR SYSTEM	APPROUVE	04.02.1980	PARIS SCHOENROK-HYDRAULIK
33-03.500 4/10	590	26.11.1979	ELECTRIC SCHEM W.T. DOOR SYSTEM	APPROUVE	04.02.1980	PARIS SCHOENROK-HYDRAULIK
33-03.500 5/10	590	26.11.1979	ELECTRIC SCHEM W.T. DOOR SYSTEM	APPROUVE	04.02.1980	PARIS SCHOENROK-HYDRAULIK
53-03.500 8/10	590	11.11.1979	ELECTRIC SCHEM W.T. DOOR SYSTEM	APPROUVE	04.02.1980	PARIS SCHOENROK-HYDRAULIK
53-03.500 9/10	590	25.06.1980	GENERAL ARR. ENGINE LOAD CONTROL	APPROUVE	04.02.1980	PARIS SCHOENROK-HYDRAULIK
B1108.5224		04.06.1980	GENERAL ARR. DECK 2 & 4	APPROUVE	29.07.1980	PARIS MEYER
B1106.5293		03.08.1980	GENERAL ARR. DECK 5 & 7	APPROUVE	28.07.1980	PARIS MEYER
B1106.5291		07.05.1980	GENERAL ARR. DECK 8 & 10	APPROUVE	28.07.1980	PARIS MEYER
511.45702	590	11.12.1979	DISELSSTART AND CONNECTION BOX	APPROUVE	27.11.1980	PARIS ROLF JANSEN GMBH
01016.L265	590	04.07.1980	LIST OF LAMPS	VU	28.07.1980	PARIS SIEMENS AG
133-003		24.01.1980	ELECTRIC DIAGRAM FOR POSITION INDICATOR	APPROUVE	19.03.1980	PARIS CAVO
F01.46824		28.01.1980	ELECTRIC DIAGRAM FOR VALVE CONTROL	APPROUVE	19.03.1980	PARIS CAVO
HA 688 5		19.03.1975	EXHAUST GAS HEATER GENERAL ARR.	APPROUVE	05.03.1980	PARIS SANEA
111169		19.03.1975	GENERAL ARR. ENGINE LOAD CONTROL II	APPROUVE	03.04.1980	PARIS K.M.W.
592939		26.10.1978	PROPELLER LOAD SIGNAL UNIT	APPROUVE	03.04.1980	PARIS K.M.W.
14097		04.10.1979	PROPELLER COMBINATOR GRAM	APPROUVE	03.04.1980	PARIS K.M.W.
592974 1&2		14.11.1979	PROPELLER SPARE PARTS ELECTRIC REMOTE CONTROL SYSTEM	APPROUVE	03.04.1980	PARIS K.M.W.
MA 668 6	590	23.02.1980	ISOLIERUNG THERMAL OL RÖHRE	APPROUVE	03.04.1980	PARIS MEYER
594928		04.10.1979	PROPELLER EL. REMOTE CONTROL SYSTEME ERIC I	APPROUVE	03.04.1980	PARIS MEYER
594927 1/3		04.10.1979	PROPELLER EL. REMOTE CONTROL CABLE DIAGRAM	APPROUVE	03.04.1980	PARIS K.M.W.
594927 2/3		04.10.1979	PROPELLER EL. REMOTE CONTROL CABLE DIAGRAM	APPROUVE	03.04.1980	PARIS K.M.W.
594927 3/3		31.10.1979	PROPELLER EL. REMOTE CONTROL CABLE DIAGRAM	APPROUVE	03.04.1980	PARIS K.M.W.
594928		04.10.1979	PROPELLER CONNECTION DIAGRAM O.D.-BOX	APPROUVE	03.04.1980	PARIS K.M.W.
594933 1/2		01.11.1979	PROPELLER EL. REMOTE CONTROL SYSTEM CONTROL PANEL BRIDGE	APPROUVE	03.04.1980	PARIS K.M.W.

DRYG N°	HULL N°	DRAW DATE	TITLE	REVIEW	DATE	LOCATION
594551 3/2		01.11.1979	PROPELLER EL. REMOTE CONTROL SYSTEM CONTROL PANEL BRIDGE	APPROUVE	25.01.1980	PARIS K.M.W.
232975 1/2		17.05.1974	PROPELLER EL. REMOTE CONTROL SYSTEM CONTROL PANEL CONTROL ROOM	APPROUVE	03.04.1980	PARIS K.M.W.
232975 3/2		17.05.1974	PROPELLER EL. REMOTE CONTROL SYSTEM CONTROL PANEL FOR CONTROL ROOM	APPROUVE	03.04.1980	PARIS K.M.W.
232974 1/2		17.05.1978	PROPELLER EL. REMOTE CONTROL SYSTEM CONTROL PANEL ANNEX	APPROUVE	03.04.1980	PARIS K.M.W.
232974 3/2		17.05.1978	PROPELLER EL. REMOTE CONTROL SYSTEM CONTROL PANEL ANNEX	APPROUVE	03.04.1980	PARIS K.M.W.
03 1	590	18.11.1979	ANHÖR DER SPERGT, GRÄVLASS, TKS AUFBEREIT, ANLAG, AUSTRITTE IN DER AUßENSEITEN	APPROUVE	25.01.1980	PARIS MEYER
53 2	590	12.10.1979	QUEISCHUTTE WAGENDECK SPAGETTIE	APPROUVE	25.01.1980	PARIS MEYER
61 1	590	01.02.1980	VENTILATION PLAN BLATT 1	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 2	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 3	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 4	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 5	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 6	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 7	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 8	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 9	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 10	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 11	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 12	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 13	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 14	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 15	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 16	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 17	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 18	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 19	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 20	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 21	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 22	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 23	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 24	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 25	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 26	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 27	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 28	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 29	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 30	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 31	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 32	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 33	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 34	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 35	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 36	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 37	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 38	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 39	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 40	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 41	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 42	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 43	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 44	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 45	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 46	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 47	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 48	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 49	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 50	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 51	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 52	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 53	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 54	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 55	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 56	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 57	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 58	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 59	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 60	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 61	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 62	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 63	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 64	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 65	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 66	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 67	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 68	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 69	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 70	APPROUVE	17.04.1980	PARIS MEYER
590		01.02.1980	VENTILATION PLAN BLATT 71	APPROUVE	17.04.1980	

DRWG N°	HULL N°	DRWG DATE	TITLE	REVIEW	DATE	LOCATION
611	599	19/11/1979	AHRSCHLÜSSEL DER LUFT-UND PELZROHRE	APPROUVE	19.02.1980	HAMBURG MEYER
00109-525	599	14.12.1979	MAIN SWITCHBOARD PANEL 1.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00109-515	599	11/12/1979	MAIN SWITCHBOARD PANEL 5.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00109-516	599	17.12.1979	KEMERG. SWITCHBOARD PANEL 5.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-A151C	599	13.11.1979	EMERG. SWITCHBOARD	VU	19.02.1980	HAMBURG SIEMENS AG
00106-S16	599	19.12.1979	SINGLE LINE DIAGRAM	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S162	599	17.12.1979	EMERG. SWITCHBOARD PANEL 2.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S164	599	27.12.1979	EMERG. SWITCHBOARD PANEL 1.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S163	599	17.12.1979	EMERG. SWITCHBOARD PANEL 2.4	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S164	599	17.12.1979	EMERG. SWITCHBOARD PANEL 3	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S165	599	17.12.1979	EMERG. SWITCHBOARD PANEL 4.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-L16A	599	12.12.1979	EMERG. SWITCHBOARD	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-A101	599	11.12.1979	220V/MAIN SWITCHBOARD FRONT VIEW	VU	19.02.1980	HAMBURG SIEMENS AG
00106-A203	599	11.12.1979	380V/MAIN SWITCHBOARD FRONT VIEW	VU	19.02.1980	HAMBURG SIEMENS AG
00106-S110	599	10.01.1980	220V/SWITCHBOARD	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S112	599	17.12.1979	220V-SWITCHBOARD PANEL 2.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-L117A	599	07.12.1979	220V-SWITCHBOARD	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-G111A	599	16.12.1979	220V-SWITCHBOARD PANEL 1.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S112	599	17.12.1979	220V-SWITCHBOARD FRONT VIEW	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S16	599	15.12.1979	MAIN SWITCHBOARD PANEL 1.12	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S11	599	11.12.1979	MAIN SWITCHBOARD PANEL 1.13	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S12	599	15.12.1979	MAIN SWITCHBOARD PANEL 2.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S15A	599	11.12.1979	MAIN SWITCHBOARD PANEL 3.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S14	599	12.12.1979	MAIN SWITCHBOARD PANEL 4.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S17	599	12.12.1979	MAIN SWITCHBOARD PANEL 7.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S18	599	12.12.1979	MAIN SWITCHBOARD PANEL 8.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S19	599	12.12.1979	MAIN SWITCHBOARD PANEL 9.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S20A	599	17.12.1979	MAIN SWITCHBOARD PANEL 10 ALTERNATOR 1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S21	599	15.12.1979	MAIN SWITCHBOARD PANEL 10 ALTERNATOR 2	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S22	599	11.12.1979	MAIN SWITCHBOARD PANEL 12 BOV THRUSTER 1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S22A	599	14.12.1979	MAIN SWITCHBOARD PANEL 13 ALTERNATOR 3	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S24A	599	17.12.1979	MAIN SWITCHBOARD PANEL 14 ALTERNATOR 4	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S26	599	12.12.1979	MAIN SWITCHBOARD PANEL 16.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S27	599	12.12.1979	MAIN SWITCHBOARD PANEL 17.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S28	599	12.12.1979	MAIN SWITCHBOARD PANEL 18.13.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S29	599	12.12.1979	MAIN SWITCHBOARD PANEL 19.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-S30	599	12.12.1979	MAIN SWITCHBOARD PANEL 20.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-L037B	599	07.12.1979	MAIN SWITCHBOARD PANEL 21.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
00106-L037C	599	07.12.1979	MAIN SWITCHBOARD PANEL 22.1	APPROUVE	19.02.1980	HAMBURG SIEMENS AG
3102259	599	26.11.1979	KURZELCLUBBERECHNUNG NACH DIN 89013	APPROUVE	23.04.1980	PARIS SIEMENS AG ??
3102259	599	26.11.1979	RICHR.U. HYDRAULIK SCHEM	APPROUVE	19.12.1979	HAMBURG SCHENORCK HYRAULIK
3102260A	599	26.11.1979	SCHOTTSCHLEIFER SPT 23 3700X2600	APPROUVE	07.01.1980	HAMBURG SCHENORCK HYRAULIK
1651	599	11.10.1979	QUERSCHOTT SPT. 132/133 TANKLÄNGSWAND V. SPT. 120/132	APPROUVE	15.02.1980	HAMBURG MEYER
1441	599	11.10.1979	EINBAUMANDE A. D. TANKOKECK	APPROUVE	15.02.1980	HAMBURG MEYER
3220254	599	26.11.1979	HYDR. SCHEMA SCHOTTUR NR.12 270/260MM	APPROUVE	07.01.1980	HAMBURG SCHENORCK HYRAULIK
3202255BD	599	02.01.1979	GENERAL ARRANGEMENT 1	VU	18.12.1979	HAMBURG MEYER
3202255G/D	599	02.01.1979	HYDRAULIC CONTROL SYSTEM FOR W.T. BULKHEAD DOORS RIGHT CLOSING	APPROUVE	19.12.1979	HAMBURG SCHENORCK HYRAULIK
3142002	599	12.10.1988	ZUSAMMENSTELLUNG	APPROUVE	18.12.1979	HAMBURG SCHENORCK HYRAULIK

DRWG N°	HULL N°	DRWG DATE	TITLE	REVIEW	DATE	LOCATION
1643	599	02.10.1979	QUERSCHOTT SPT. 120	APPROUVE	09.11.1979	HAMBURG MEYER
1642	599	03.10.1979	QUERSCHOTT SPT. 110	APPROUVE	09.11.1979	HAMBURG MEYER
1641	599	25.09.1979	QUERSCHOTT SPT. #5	APPROUVE	09.11.1979	HAMBURG MEYER
1640	599	25.09.1979	QUERSCHOTT SPT. #6	APPROUVE	09.11.1979	HAMBURG MEYER
1633	599	05.10.1979	QUERSCHOTT SPT. #8	APPROUVE	09.11.1979	HAMBURG MEYER
1632	599	08.10.1979	QUERSCHOTT SPT. 10/250H UND LANGSSCHOTT 690A.M. SPT. 80/60H	APPROUVE	09.11.1979	HAMBURG MEYER
1631	599	13.09.1979	QUERSCHOTT SPT. 71	APPROUVE	09.11.1979	HAMBURG MEYER
1622	599	13.09.1979	QUERSCHOTT SPT. #3	APPROUVE	09.11.1979	HAMBURG MEYER
1623	599	13.09.1979	QUERSCHOTT SPT. #5	APPROUVE	09.11.1979	HAMBURG MEYER
1621	599	15.10.1979	QUERSCHOTT SPT. 33	APPROUVE	09.11.1979	HAMBURG MEYER
42-02151		09.12.1979	ARRANGEMENT LIFT P/T SPT. 23/28	INFO		HAMBURG SCHENORCK HYRAULIK
1412	599	14.11.1979	AUßENKAUT A-D/DECK SPT. 2618 50	APPROUVE	15.02.1980	HAMBURG MEYER
1200-255	599	30.11.1979	TEILE VON DEM U/T	INFO		HAMBURG SCHENORCK HYRAULIK
144	599	30.11.1979	QUERSCHOTT SPT. 132/133 A-B/C-D/DECK	APPROUVE	15.02.1980	HAMBURG MEYER
122	599	03.11.1979	SCHACHTYVANDE AUF DEM A-DECK VON SPT. 25/24	APPROUVE	05.02.1980	HAMBURG MEYER
1443	599	03.11.1979	SCHACHTYVANDE AUF DEM A-DECK VON SPT. 45 BIS 66	APPROUVE	05.02.1980	HAMBURG MEYER
1553	599	12.11.1979	SCHACHTYVANDE AUF DEM A-DECK VON SPT. 57/52D	APPROUVE	05.02.1980	HAMBURG MEYER
1411	599	11.12.1979	HINTERSCHIFF SPT. 28/8 HINTEN VON A-DECK BIS C-DECK	APPROUVE	05.02.1980	HAMBURG MEYER
1053	599	17.04.1980	VERSTURKUNG UNTER C-DECK	APPROUVE	05.02.1980	HAMBURG MEYER
1590-561-1C	599	15.12.1979	4-C-DECK	APPROUVE	05.05.1980	HAMBURG AG MEYER
1590-567-1	599	22.11.1979	5. DECK D/DECK	APPROUVE	10.01.1980	HAMBURG AG MEYER
1590-567-2	599	09.10.1979	6. DECK E/DECK	APPROUVE	10.01.1980	HAMBURG AG MEYER
1590-567-3	599	09.10.1979	7. DECK F/DECK	APPROUVE	10.01.1980	HAMBURG AG MEYER
1590-567-4	599	24.11.1979	8. G/DECK	APPROUVE	10.01.1980	HAMBURG AG MEYER
1590-561-1	599	20.11.1979	AUßENKAUT 4-7. DECK SPT. #/05.1/2	APPROUVE	10.01.1980	HAMBURG AG MEYER
1590-551-2	599	1978	AUßENKAUT 4-7. DECK SPT. 75.1/2 - 139	APPROUVE	10.01.1980	HAMBURG AG MEYER
1590-547-5	599	18.11.1979	8. H/DECK	APPROUVE	10.01.1980	HAMBURG AG MEYER
1590-551-13	599	17.10.1979	FRONTVAUD SPT. 139	APPROUVE	15.02.1980	HAMBURG AG MEYER
599	599	27.03.1980	LIST OF DRAWINGS SUPPLY FOR CONTROL ENGINE, REMOTE CONTROL SAFETY SYSTEM AND MONITORING	APPROUVE	30.07.1980	PARIS M.A.N.
1580005/9/910		02.04.1980	LIST OF CONTROL + CONTROL DEVICE	WITHOUT AP		M.A.N.
A11.2100-2445			STEUERUNGSSCHEIBE ZUR ZWEI NICHT UMSTEUERBARE MOTOREN ÜBER	WITHOUT AP		M.A.N.
			BAUVELVENTIL/STEUERUNGSGETRIEBE AUF VERSTELLPROPELLER	WITHOUT AP		M.A.N.
G11.2560-001E			CONTROLLER FOR THE TWO MOTORS	WITHOUT AP		M.A.N.
G11.2560-3572		01.10.1979	OPERATING EQUIPMENT VP-D/DECKS-ENGINES	WITHOUT AP		M.A.N.
B11.2560-3574		10.10.1979	OPERATING EQUIPMENT VP-DOUBLES-ENGINES ENGINE	WITHOUT AP		M.A.N.
B11.2560-3511		14.05.1978	KLEIMENDEPLAN FÜR BEFESTIGUNGSTAND AM MOTOR FÜR ZWEI NICHT UMSTEUERBARE MOTOREN MIT SAMMELUNTERSETZUNGSGETRIEBE UND VERSTELLPROPELLER	WITHOUT AP		M.A.N.
B11.2560-3511		14.05.1979	KLEIMENDEPLAN FÜR BEFESTIGUNGSTAND AM MOTOR FÜR ZWEI NICHT UMSTEUERBARE MOTOREN MIT SAMMELUNTERSETZUNGSGETRIEBE UND VERSTELLPROPELLER	WITHOUT AP		M.A.N.
C11.12500-3576		09.01.1980	TELE ADMISSION TRANSMITTER	WITHOUT AP		M.A.N.
B11.12500-3443		03.10.1979	DREHAUPTSTEUERUNG FÜR ZWEI NICHT UMSTEUERBARE MOTOREN ÜBER	WITHOUT AP		M.A.N.
			SAMMELUNTERSETZUNGSGETRIEBE AUF VERSTELLPROPELLER	WITHOUT AP		M.A.N.
F11.12500-3448		05.09.1977	THEIR POSITION FROM REMOTE CONTROL ROOM	WITHOUT AP		M.A.N.
B11.4950-2025			CABLING OF ELECTRICAL MOTORS AND CLUTCHES WITH ENGINE	WITHOUT AP		M.A.N.
C11.4950-2023		26.09.1978	CABLING OF ELECTRICAL MOTORS AND CLUTCHES WITH ENGINE	WITHOUT AP		M.A.N.
A11.12500-3458		14.03.1980	CONNECTION DIAGRAM FOR REMOTE CONTROL CLUTCH AND ENGINE MONITORING	WITHOUT AP		M.A.N.
A11.12500-3466		14.03.1980	CONNECTION DIAGRAM FOR REMOTE CONTROL CLUTCH AND ENGINE MONITORING	WITHOUT AP		M.A.N.
A11.12500-3466		20.03.1980	CONNECTION DIAGRAM FOR REMOTE CONTROL CLUTCH AND ENGINE MONITORING	WITHOUT AP		M.A.N.
A11.12500-3468		14.03.1980	CONNECTION DIAGRAM FOR REMOTE CONTROL CLUTCH AND ENGINE MONITORING	WITHOUT AP		M.A.N.

DRWG N°	HULL N°	DRWG DATE	TITLE	REVIEW	DATE	LOCATION
A11.12500-4369		14.03.1969	CONNECTION DIAGRAM FOR REMOTE CONTROL CLUTCH AND ENGINE MONITORING	WITHOUT AP		M.A.N.
A11.12500-4369		14.03.1969	CONNECTION DIAGRAM FOR REMOTE CONTROL CLUTCH AND ENGINE MONITORING	WITHOUT AP		M.A.N.
S11189		12.03.1975	PROPELLER PANEL FOR INSTRUMENTS 2 ENGINES	APPROVUE	08.04.1980	HAMBURG KMW
S12189		29.10.1970	PROPELLER LOAD SHARING UNIT	APPROVUE	08.04.1980	HAMBURG KMW
S12190		12.03.1975	PROPELLER CONNECTION MAGAM Q.D. BOX	APPROVUE	08.04.1980	HAMBURG KMW
Z11432-3/3		11.10.1973	PROPELLER CONNECTION MAGAM Q.D. BOX	APPROVUE	08.04.1980	HAMBURG KMW
S12192-2/3		04.10.1979	PROPELLER EL REMOTE CONTROL CABLE GIGAM	APPROVUE	08.04.1980	HAMBURG KMW
S12192-3/3		04.10.1979	PROPELLER EL REMOTE CONTROL CABLE GIGAM	APPROVUE	08.04.1980	HAMBURG KMW
S12192		04.10.1979	PROPELLER EL REMOTE CONTROL CABLE GIGAM	APPROVUE	08.04.1980	HAMBURG KMW
S12193		04.10.1979	PROPELLER EL REMOTE CONTROL SYSTEM ERCI	APPROVUE	08.04.1980	HAMBURG KMW
J02975-1/2		17.08.1975	PROPELLER EL REMOTE CONTROL SYSTEM CONTROL PANEL CONTROL ROOM	APPROVUE	08.04.1980	HAMBURG KMW
J02975-2/2		17.03.1976	PROPELLER EL REMOTE CONTROL SYSTEM CONTROL PANEL CONTROL ROOM	APPROVUE	08.04.1980	HAMBURG KMW
J02975-4/2		17.03.1976	PROPELLER EL REMOTE CONTROL SYSTEM CONTROL PANEL ANNEX	APPROVUE	08.04.1980	HAMBURG KMW
J02975-7/2		17.06.1976	PROPELLER EL REMOTE CONTROL SYSTEM CONTROL PANEL ANNEX	APPROVUE	08.04.1980	HAMBURG KMW
S12194-2/2		01.11.1979	PROPELLER EL REMOTE CONTROL SYSTEM CONTROL PANEL BRIDGE	APPROVUE	08.04.1980	HAMBURG KMW
S12194-2/2		01.11.1979	PROPELLER EL REMOTE CONTROL SYSTEM CONTROL PANEL BRIDGE	APPROVUE	08.04.1980	HAMBURG KMW
S12195	590		PROPELLER CONTROL SYSTEM	APPROVUE	05.04.1980	HAMBURG KMW
S12196	590		PROPELLER CONTROL SYSTEM	APPROVUE	05.04.1980	HAMBURG KMW
S1114368.01		05.03.1982	ÜBERWACHUNGSSCHIFF USL 249	WITHOUT AP		M.EYER
S121	590	13.09.1979	ZWISCHENDECK SPT 152/23	APPROVUE	14.12.1979	HAMBURG MEYER
S121	590	30.10.1979	ZWISCHENDECK SPT 24/23	APPROVUE	14.01.1980	HAMBURG MEYER
S122	590	29.10.1979	ZWISCHENDECK SPT 33 + 42	APPROVUE	21.12.1979	HAMBURG MEYER
S123	590	23.10.1979	ZWISCHENDECK SPT 43 - 54	APPROVUE	14.12.1979	HAMBURG MEYER
S124	590	20.10.1979	A-DECK VON SPT 24-32	APPROVUE	14.01.1980	HAMBURG MEYER
S125	590	17.08.1979	A-DECK VON SPT 33 - 42	APPROVUE	21.12.1979	HAMBURG MEYER
S126	590	17.08.1979	A-DECK VON SPT 43 - 54	APPROVUE	21.12.1979	HAMBURG MEYER
S127	590	17.08.1979	A-DECK VON SPT 55 - 64	APPROVUE	14.12.1979	HAMBURG MEYER
S128	590	17.08.1979	A-DECK V. SPT 55 - 64	APPROVUE	14.12.1979	HAMBURG MEYER
S129	590	17.08.1979	A-DECK V. SPT 65 - 75	APPROVUE	14.12.1979	HAMBURG MEYER
S130	590	17.08.1979	A-DECK V. SPT 76 - 85F	APPROVUE	21.12.1979	HAMBURG MEYER
S131	590	14.09.1979	ZWISCHENDECK SPT 85 - 94	APPROVUE	14.12.1979	HAMBURG MEYER
S132	590	14.09.1979	ZWISCHENDECK V. SPT 65 - 75	APPROVUE	14.12.1979	HAMBURG MEYER
S133	590	14.09.1979	ZWISCHENDECK V. SPT. 76 - 85F	APPROVUE	21.12.1979	HAMBURG MEYER
S134	590	15.10.1979	A-DECK V. SPT 54 - 64	APPROVUE	14.12.1979	HAMBURG MEYER
S135	590	17.10.1979	A-DECK V. SPT 65 - 75	APPROVUE	14.12.1979	HAMBURG MEYER
S136	590	19.09.1979	A-DECK V. SPT. 76 - 85F&85 - 95	APPROVUE	21.12.1979	HAMBURG MEYER
S137	590	27.09.1979	ZWISCHENDECK SPT. 800 - 88	APPROVUE	18.11.1979	HAMBURG MEYER
S138	590	02.10.1979	A-DECK V. SPT. 800 - 88	APPROVUE	18.11.1979	HAMBURG MEYER
S139	590	02.10.1979	A-DECK V. SPT. 85 - 97	APPROVUE	19.11.1979	HAMBURG MEYER
S140	590	03.10.1979	ZWISCHENDECK SPT. 109 - 118	APPROVUE	19.11.1979	HAMBURG MEYER
S141	590	10.10.1979	A-DECK V. SPT. 37 - 57	APPROVUE	19.11.1979	HAMBURG MEYER
S142	590	12.10.1979	A-DECK V. SPT. 23 - 105	APPROVUE	19.11.1979	HAMBURG MEYER
S143	590	20.10.1979	A-DECK V. SPT. 103 - 119	APPROVUE	19.11.1979	HAMBURG MEYER
S151	590	03.11.1979	ZWISCHENDECK V. SPT. 120 - 138 KOFFERDAMM DECK V. SPT. 120 - 133	APPROVUE	14.01.1980	HAMBURG MEYER
S152	590	07.11.1979	A-DECK SPT. 123 - 135	APPROVUE	14.01.1980	HAMBURG MEYER
S153	590	03.01.1980	EINBAUWERK AUF DEM ZWISCHENDECK SPT. 23 - 133	APPROVUE	15.02.1980	HAMBURG MEYER
J01512500-4368		14.03.1969	CONNECTION DIAGRAM FOR REMOTE CONTROL CLUTCH AND ENGINE MONITORING	WITHOUT AP		HAMBURG M.A.N.
J01512500-4368		14.03.1969	ENGINE OVER RANGES OF WITH CONTROLLABLE CLUTCH PROPELLER	WITHOUT AP		HAMBURG M.A.N.
J1112500-4368	590	24.04.1979	FUEL OF THE ENGINE FOR THE LOAD CURVE WITH LOAD CONTROL	WITHOUT AP		HAMBURG M.A.N.
B1112500-3563		23.07.1977	STEIGERUNGSCHRAUBE X	WITHOUT AP		HAMBURG M.A.N.
J1112500-3508		23.05.1977	TERMINAL DIAGRAM FOR CONTROL UNIT CABINET "Z" WITHOUT PTO	WITHOUT AP		HAMBURG M.A.N.
G1112500-1820			EINSTELLUNGEN UND ANSCHLÜSSE AM WOOD WARDREGLER TYP P5-A	WITHOUT AP		HAMBURG M.A.N.
S1112500-1059			TECHNICAL NOTE MAUA 4370 PAGES 1 - 19	WITHOUT AP		HAMBURG M.A.N.
S1112500-1059			PIPE SPECIFICATION AND INSTRUCTIONS FOR INSTALLING PNEUMATIC DEVICES	WITHOUT AP		HAMBURG M.A.N.

DRWG N°	HULL N°	DRWG DATE	TITLE	REVIEW	DATE	LOCATION
A11.12500-3165		10.11.1977	CONTROL FOR ADMISSION DEPENDENT LUB. OIL PREHEATING FOR TURBO CHARGER	WITHOUT AP		HAMBURG M.A.N.
A11.12500-3445		12.07.1977	CONT. SCH. FOR TWO NON REVERS. ENG. WITH MULTIPLE GEARBOX AND CONTROLLABLE PITCH PROPELLER	WITHOUT AP		HAMBURG M.A.N.
C11.12500-4365		18.03.1978	MANUFACTURE OF THE PUMP FOR THE LUB. OIL SUPPLY OF EACH ENGINE	WITHOUT AP		HAMBURG M.A.N.
G11.99022-0019		08.05.1978	MANUFACTURE VALVE NW 80	WITHOUT AP		HAMBURG M.A.N.
G11.99023-0147		28.11.1975	3 WAY VALVE	WITHOUT AP		HAMBURG M.A.N.
F11.99023-0147		28.11.1975	3 WAY VALVE	WITHOUT AP		HAMBURG M.A.N.
E11.99021-0042		15.04.1975	FINE REGULATING VALVE	WITHOUT AP		HAMBURG M.A.N.
D11.99001-0049		22.11.1974	SCHAFTVENTIL	WITHOUT AP		HAMBURG M.A.N.
D11.99003-0181		02.05.1977	3/2 WAY SOLENOID VALVE	WITHOUT AP		HAMBURG M.A.N.
D11.99003-0182		04.05.1977	3/2 WAY VALVE	WITHOUT AP		HAMBURG M.A.N.
D11.99003-0002		04.05.1977	THREE WAY VALVE	WITHOUT AP		HAMBURG M.A.N.
D11.99003-0066		18.05.1983	3/2 WAY MAGNET VALVE	WITHOUT AP		HAMBURG M.A.N.
G11.99002-0002		18.01.1975	3/2 WAY SOLENOID VALVE OPEN CIRCUIT	WITHOUT AP		HAMBURG M.A.N.
G11.99024-0051		04.11.1975	3/2 WAY VALVE	WITHOUT AP		HAMBURG M.A.N.
F11.99024-0055		17.12.1985	DOUBLE NON RETURN VALVE	WITHOUT AP		HAMBURG M.A.N.
E11.99024-0055		05.10.1985	WATER SEPARATOR	WITHOUT AP		HAMBURG M.A.N.
D11.99024-0079		31.05.1972	DRUCKREGELVENTIL	WITHOUT AP		HAMBURG M.A.N.
D11.99005-0059		03.11.1975	3/2 WAY VALVE	WITHOUT AP		WAICO WESTINGHOUSE
D11.99005-0009		14.11.1975	3/2 WAY VALVE	WITHOUT AP		WAICO WESTINGHOUSE
G11.99005-0012		06.11.1975	TIME DELAY VALVE	WITHOUT AP		WAICO WESTINGHOUSE
G11.99005-0002		13.03.1975	TIME DELAY VALVE	WITHOUT AP		WAICO WESTINGHOUSE
G11.99005-0009		06.11.1975	PRESSURE SWITCH	WITHOUT AP		WAICO WESTINGHOUSE
G11.99005-0099		11.11.1975	PRESSURE SWITCH	WITHOUT AP		WAICO WESTINGHOUSE
B11.99005-0077		05.02.1972	DRUCKREGELVENTIL	WITHOUT AP		WAICO WESTINGHOUSE
G11.99005-0077		22.02.1972	DRUCKREGELVENTIL	WITHOUT AP		WAICO WESTINGHOUSE
G11.99005-0066		28.10.1975	IVECHI-SLVM/NTU	WITHOUT AP		WAICO WESTINGHOUSE
D11.99005-0056		11.11.1975	WECHSELVENTIL	WITHOUT AP		WAICO WESTINGHOUSE
E11.99003-0152		23.07.1972	3/2 WAY VALVE	WITHOUT AP		WAICO WESTINGHOUSE
E11.99003-0152		25.07.1972	3/2 WAY VALVE	WITHOUT AP		WAICO WESTINGHOUSE
D11.99005-0068		04.11.1975	3/2 WAY VALVE	WITHOUT AP		WAICO WESTINGHOUSE
D11.99005-0053		11.11.1975	3/2 WAY VALVE	WITHOUT AP		WAICO WESTINGHOUSE
G11.99005-0072		15.08.1975	PRESSURE REDUCING STATION	WITHOUT AP		WAICO WESTINGHOUSE
G11.99005-0002		15.08.1975	PRESSURE REDUCING STATION	WITHOUT AP		WAICO WESTINGHOUSE
A11.911			FLUSH TYPE ILLUMINATED ON/OFF PUSHBUTTON SWITCH TYP KNOB	WITHOUT AP		HAMBURG M.A.N.
E11.99007-0472		01.04.1977	UNIT SWITCH	WITHOUT AP		HAMBURG M.A.N.
E11.99007-0569		31.10.1975	ILLUMINATED KEY	WITHOUT AP		HAMBURG M.A.N.
E11.99007-0544		31.10.1975	ILLUMINATED SWITCH	WITHOUT AP		HAMBURG M.A.N.
D11.40002-0053		21.01.1987	BBB-D.C. SPEED TRANSMITTER	WITHOUT AP		HAMBURG M.A.N.
E11.99013-0169		12.01.1977	EL. SPEED INDICATING INSTRUMENT	WITHOUT AP		HAMBURG M.A.N.
G11.99013-0171		14.01.1977	ELEKTRISCHE DREHAHLANZEIGER	WITHOUT AP		HAMBURG M.A.N.
F11.99013-0175		20.03.1978	SPEED TRANSMITTER READY FOR INSTALLATION	WITHOUT AP		HAMBURG M.A.N.
E11.99013-0174		15.02.1978	EL. SPEED INDICATOR (TURBOLADER)	WITHOUT AP		HAMBURG M.A.N.
E11.99037-0111		09.04.1977	MULTIFUNCTIONAL SWITCH	WITHOUT AP		HAMBURG M.A.N.
E11.99012-0103		22.04.1977	PRESSURE SWITCH	WITHOUT AP		HAMBURG M.A.N.
E11.99011-0267		21.01.1977	TEMPERATURFÜHLER FÜR KURBELWELLEMÄGLER	WITHOUT AP		HAMBURG M.A.N.
E11.99012-0028		18.04.1985	PRESSURE DIFFERENTIAL SWITCH	WITHOUT AP		HAMBURG M.A.N.
214931-002		12.01.1980	UNIVERSAL MONITORING SYSTEM 212 MAIN BEARING SUPERVISION DIAGRAM	WITHOUT AP		HAMBURG SOREN, LYNGSO
E11.99011-0169		29.02.1979	TEMPERATURE SENSOR	WITHOUT AP		HAMBURG M.A.N.

DRAWING N°	HULL N°	DRWD DATE	TITLE	REVIEW	DATE	LOCATION
E11.9901-0118		26.02.1979	MODULAR SWITCHGEAR	WITHOUT AP		HAMBURG M.A.N.
E11.9901-0246		26.02.1978	MODULAR SWITCHGEAR	WITHOUT AP		HAMBURG M.A.N.
E11.9901-0318		22.05.1972	RESISTANCE THERMOMETER	WITHOUT AP		HAMBURG M.A.N.
E11.9901-0105		13.05.1972	SWITCHGEAR FOR MONITORING FUEL TEMPERATURE	WITHOUT AP		HAMBURG M.A.N.
E11.9901-0106		13.07.1972	SWITCHING DEVICE FOR CONTROL OF FUEL TEMPERATURE	WITHOUT AP		HAMBURG M.A.N.
F11.6401-0175		11.01.1972	F.O. LEAKAGE COLLECTING TANK WITH BAR-TYPE PROBE	WITHOUT AP		HAMBURG M.A.N.
F11.6401-0185		27.09.1972	CONDENSATE WATER COLLECTING TANK WITH BAR-TYPE PROBE	WITHOUT AP		HAMBURG M.A.N.
E11.9901-0225		30.04.1974	BAR-TYPE PROBE WITH ELECTRONIC INSERT	WITHOUT AP		HAMBURG M.A.N.
E11.9901-0232		27.09.1972	SWITCHGEAR FOR MONITORING FUEL TEMPERATURE	WITHOUT AP		HAMBURG M.A.N.
E11.9901-0216		17.09.1975	DOUBLE TUBING COUPLE WITH PROTECTING WELL	WITHOUT AP		HAMBURG M.A.N.
A11.12500-0364		09.11.1973	ARRANGEMENT OF PRESSURE SWITCHES	WITHOUT AP		HAMBURG M.A.N.
C11.12500-0365		09.11.1973	TERMINAL DIAGRAM OF MOUNTING OF PRESSURE SWITCHES	WITHOUT AP		HAMBURG M.A.N.
C11.12500-0320		15.03.1973	MOUNTING OF PRESSURE SWITCHES	WITHOUT AP		HAMBURG M.A.N.
C11.12500-0344		25.04.1977	MOUNTING OF PRESSURE SWITCHES	WITHOUT AP		HAMBURG M.A.N.
E11.12500-0420		15.02.1971	ATTACH TESTING DEVICE FOR PRESSURE SWITCH	WITHOUT AP		HAMBURG M.A.N.
F11.12591-1018		08.10.1976	SCHILD 220x150mm (BESTELLEIICHNUNG)	WITHOUT AP		HAMBURG M.A.N.
F11.12591-1019		09.10.1976	SCHILD 220x150mm (BESTELLEIICHNUNG)	WITHOUT AP		HAMBURG M.A.N.
F11.12591-1020		09.10.1976	SCHILD 220x150mm (BESTELLEIICHNUNG)	WITHOUT AP		HAMBURG M.A.N.
C11.91018-0019		14.08.1971	OLMISTODECTECTOR	WITHOUT AP		HAMBURG M.A.N.
E11.99019-0020		09.11.1971	TERMINAL BOX AND TERMINAL DIAGRAM TO OIL MIST DETECTOR MK4	WITHOUT AP		HAMBURG M.A.N.

List of drawings sent by BV to the JAIC

Enclosure 2.4.3.36

DRAWING N°	TITLE	DATE OF APPROVAL
<u>Bow visor</u>		
590/1103 rev.6	Bugklappe	20.06.80
590/1106 rev.G	BUGklappaverriegelung	20.06.80
49111-373	Atlantikschlüsselung	02.07.80
590/1101 a	Vorschiff spt 149 - vorne	04.12.79
49111-372	Automatische und manuelle verschlussanordnungen für bugklappe	02.07.80
49111-330	Bugklappe und bugrampe zusammenstellung	05.11.79
<u>Bow ramp</u>		
49111-301 a	Bugrampe	05.11.79
49111-303	Details für bugrampe (von Teil lieferung)	05.11.79
49111-360	Hydraulische verschlussanordnungen bugrampe	05.11.79
49111-302	Details für bugrampe	05.11.79
49111-361	Verriegelung für bugrampe	05.11.79

BUREAU VERITAS
Marine Division
T.N. DT1/N° 95/00136/SEG

Paris La Défense, 10 January 1995

M/V ESTONIA
Summary of class and statutory interventions

Contents

A Classification

- A1 Review of drawings
 - A11 Bureau Veritas rules
 - A111 Requirements for bow doors in the 1977 rules
 - A112 Rules evolution since 1977
 - A113 Implementing Solas requirements in Bureau Veritas rules
 - A12 Examination of locking devices
 - A121 Remarks put on the reviewed drawings
- A2 Appraisal of the selection of materials
- A3 Survey during construction of the ship
 - A31 Survey of bow visor welds

B Issuance of statutory certificates

- B1 Certificates issued by Bureau Veritas in 1980
- B2 Certificates issued by the National Authorities in 1980

C Implementing Retrofit requirements according to IMO

- C1 Stability
- C2 Monitoring of bow locking

D Change of flag in February 1993

- D1 Bureau Veritas authorizations for Estonian flag vessels
- D2 Surveys carried out by Bureau Veritas

E Renewal of certificates as from 1993.

A Classification

A1 Review of drawings

A11 Bureau Veritas Rules

M/V Estonia has been classed by Bureau Veritas since newbuilding under special survey.

The request for classification (Annex 1) was signed 27 September 1979.

The class rules in force at that time were the 1977 issue.

A complete set of these rules is annexed to this summary.

A111 Requirements for bow doors in the 1977 rules

These requirements are given in para. 11-44, indentation 2 & 3:

- the scantlings of door plating and stiffeners are those of the adjacent shell structure;
- local reinforcements are required in way of cleats, hinges, and jacks attachments;
- the removable extension of the collision bulkhead above the bulkhead deck is to be made weatherlight, however its position is not specified (see also 6-62.14 of the Bureau Veritas rules)

A112 Rules evolution since 1977

The 1980 set of rules is identical to the 1977, for bow doors requirements.

The June 1981 amendments contained a rule calculation method for bow visor securing devices, similar to the S8 unified requirement of IACS, except for the pressure criteria. The distance from the inner door to the fore perpendicular is required to be within the limits specified in Solas 1974, as amended 1981.

No change made in the 1982 issue.

In the 1985 issue, slight modifications were made to the rule calculation of forces on bow visor to be considered for securing devices.

In the November 1987 issue, the requirements were consolidated in full compliance with the IACS S8 unified requirement.

In January 1991, the minimum thickness of bow door plating was increased. The strength of large flared bow doors was to be specially considered.

A113 Implementing Solas requirements in Bureau Veritas rules

The 1960 Solas convention was in force at the time the Estonia was built. Chapter II, reg. 9 requests a weatherlight extension of the collision bulkhead to be located aft of the forward perpendicular by 5 percent of the ship's length, at least.

This requirement was maintained in the Solas 1974.

The 1981 amendments to the convention mentioned for the first time bow ramps and specifically allowed the part higher than 2.3 meter above the bulkhead deck to be outside the limit for the location of the extension of the collision bulkhead. (relevant excerpts are enclosed as annex 3).

After the entry into force of the 1981 amendments, in September 1984, most internal sloped bow ramps could be located within the limit. Operational constraints made it difficult to comply with the previous requirement which was not aimed at this arrangement. Bureau Veritas implemented this new requirement in its rules as from adoption at IMO, in June 1981, thus anticipating the September 1984 entry into force. No requirement was implemented to this end in the Bureau Veritas rules prior to this date.

A12 Examination of locking devices

The bow door drawings of the M/V Estonia were reviewed by the Hamburg local office of Bureau Veritas which was in charge of the review. List of reviewed drawings is given as annex 4.

The drawings were checked against the Bureau Veritas 1977 rules which did not contain formula for the rule strength of securing devices of shell doors opening outwards.

Information was received from the bow door designer, Messrs Von Tell, which stated in their telex dated 18 march 1980 (annex 5) to the local Bureau Veritas office in Hamburg that they had designed according to the Lloyd's Register rules.

A121 Remarks put on the reviewed drawings

Bow visor drawing (590/1103)

The remarks conform strictly to the rule requirements:

Rule requirements	Remarks on the drawing
15- The closing of doors is to be watertight. The thickness of plating is not to be less than for adjacent side shell.	1) Arrangements of locking devices subject to the approval of the national Authorities. 2) Watertightness of the ramp and local reinforcements of the ship's structures in way of locking devices, cylinders and hinges to Surveyor's satisfaction.
31- Doors and screen-doors have to be firmly secured by use of cleats conveniently spaced or other similar devices. Particularly, it has to be provided one of these devices at each corner of opening. Structure reinforcements have to be realised on door and adjacent shell plating to attached points of cleats, hinges, jacks, etc.	3) Jack lifting eye on arms, atlantic lock eye, side lock eyes, requested in steel grade St 52-3. 4) Local reinforcements requested and indicated under the side blocks active in y-direction (transverse).

General arrangement drawing of bow visor and ramp (49111-330)

Similar remarks were made:

Remarks on the drawing
1) Arrangement of locking devices and protection against shifting cargoes subject to the approval of the National Authorities.
2) Watertightness of the ramp and bow visor to Surveyor's satisfaction.
3) Local reinforcement of the ship's structure in way of - locking devices - cylinders - hinges to Surveyor's satisfaction.
4) High pressure flexible pipes must be approved by BV .

By the remark concerning the National Authorities it was made clear that locking devices were considered as an item subject to the examination and approval of the Finnish Authorities issuing the Passenger Ship Safety Certificate of the vessel.

A2 Appraisal of the selection of materials

The Bureau Veritas rule requirements are set out in chapters 3 and 25 of the 1977 issue.

For grade A steel, a ladel analysis and a tensile test is required for each 50 tons batch (para. 25-32 of the 1977 rules).

Grade A steel is acceptable for all plates under 20 mm thickness.

A3 Survey during construction

The survey of the construction of the bow visor and ramp was done by the Oldenburg field office of Bureau Veritas.

Due consideration was given to the classification remarks put on the drawings .

A translated extract of the field Surveyor remarks appearing in his note book is given in annex 6.

Concerning the reinforcements under locks, two flat bars 230x22 mm were fitted under the side locks (visor side).

A31 Survey of bow visor welds

The control of welds is carried out according to the requirements of section 3-3 of the 1977 issue of the rules.

It includes a visual inspection of the line of welding to check aspect and uniformity.

The Surveyor carries out random close up surveys and requests non destructive testing where specified on the drawing or by the rules, and in case of doubt.

B Issuance of statutory certificates**B1 Certificates issued by Bureau Veritas in 1980**

The certificates issued by Bureau Veritas to the newbuilding are listed in the request of classification (annex 1, second page).

Bureau Veritas issued the International Load Line certificate to the vessel, in accordance with the request of classification and on behalf of the Finnish Authorities.

In relation with the issuance of this certificate, the field Surveyor checked the watertightness of the bow visor (rubber packing) during construction and at sea trials. (remarks dated 23 April, 11 and 26 June 1980 of the Surveyor notebook, in annex 6)

B2 Certificates issued by the National Authorities in 1980

The Finnish Authorities issued the Passenger Ship Safety Certificate pursuant to Solas 1960 Convention.

The stability file was approved by the Finnish Authorities in 1981.

C Implementing Retrofit requirements according to IMO**C1 Stability**

In 1991, a file modified further to the new IMO requirements was re-examined and approved by the Finnish Authorities.

C2 Monitoring of bow locking

Also in 1991-1992, the bow door and bow ramp control and monitoring devices were checked by the Finnish Authorities against the new IMO requirements.

The bow door cleating and monitoring consisted of:

- 2 side cleats hydraulically operated with limit switches on bolts (open & closed positions);
- 1 central lower cleat ("Atlantic") with separate hydraulic control with limit switches on bolts (open & closed positions);
- 2 manually operated fasteners for heavy weather with limit switches on bolts (open & closed positions).

The ramp cleating consisted of:

- 2 jack operated hooks;
- 4 horizontal cleats;
- all hydraulically controlled and provided with limit switches for open and closed positions.

The overall cleating was surveyable from a mimic panel (red and green lamps for each cleating group) both at the local control station and on the navigating bridge; video monitoring of the car deck included a view of the ramp closure.

D- Change of flag in February 1993

D1 Bureau Veritas authorizations for Estonian flag vessels

Bureau Veritas received as of 18 August 1992 authorisation from the Government of Estonia to issue certificates pursuant to the following conventions:

Load Line 1966
SOLAS 1974
MARPOL 1973
Tonnage 1969

The following documents were issued to the vessel:

International Load Line Certificate
Passenger Ship Safety Certificate
International Oil Pollution Prevention Certificate
International Tonnage Certificate 1969

Attestation pursuant to the Helsinki convention 1974
(prevention of pollution by sewage).

D2 Surveys carried out by Bureau Veritas

The vessel had valid International Certificates and kept the Bureau Veritas class when applying to fly the Estonian flag.

A periodical survey pursuant to SOLAS 1974, consolidated edition 1992, Chapter I, Part B, Regulation 7 (b) (ii) was carried out by Bureau Veritas on behalf of the Estonian Government according to the transfer of flag clauses of the Agreement signed 18 August 1992 between the Estonian Maritime Administration and Bureau Veritas.

The Exemption Certificate granted by the Finnish Authorities for radiotelegraphy (hours of listening by operator) was not re-issued under Estonian flag.

In the course of the periodical survey carried out by Bureau Veritas, a few anomalies were detected and notified to the Finnish Authorities.

E Renewal of certificates as from 1993.

The ship was surveyed and certificates renewed during the period 1993-1994.

The Passenger Ship Safety Certificate was kept Interim pending completion of the vessel new loading cases.




J.-F. SEGRETAIR

List of annexes

Annex 1

Request for classification
dated 27 September 1979

Annex 2

Extracts of Bureau Veritas Rules

June 1980
June 1981
June 1982
August 1985
November 1987

Annex 3

Solas 1960, Reg. 9, Chapter II-1
Solas 1974, as amended 1981, Reg. 10, Chapter II-1

Annex 4

List of reviewed drawings.

Annex 5

Copy of telex dated 18 March 1980
received from Messrs Von Tell,
designers of the bow visor and ramp.

Annex 6

Translated extract of the field Surveyor Notebook

Extract of notebook of BV surveyor G lohmann

EXTRACT of inspections acc. to
Surveyor's Notebook

carried out on the
NC. 590 (Bü Reg.-Nr. 35 P 387) of the shipyard
Messrs. Jos. L. Meyer at Papenburg
during building.-

28 - 03 - 80 GLO
Bugklappenanlass auf Hinterkante

Inspection of HULL - Construction acc. to the
remarks made on drawings of Messrs. TELL
during approval.

23 - 04 - 80 J.D.
Allgemeine Besichtigung Freibord

Checking of closing arrangements for the
FREEBOARD REPORT on form Mod. 195

11. 06 - 80
Kontrolle des Seitenhäcks vorn und achtern,
sowie des achternen Mittelhäcks auf dem
Hauptdeck - Geringe Restarbeiten.


Checking in way of the CARDECK forward
including bowramp and bowvisor - resting
and connection.

Remark: Construction and fitting of packing!
in closed position checked by
means of chalk,-

26 - 06 - 80
Fortsetzung der Programme vom 25. Juni 1980
in See u.a. Kontrolle des Bugvisors.

During trials at sea under normal running
conditions the space between bow visor and
bowramp has been inspected for tightness.

NOTE: For inspections, tests and trials yard-
protocols are made from the yard and
signed by the parties concerned.-


G. Lohmann

Made out at Oldenburg on Nov. 23 - 1994

- 47 -

Freeboard survey report on form 195

BUREAU VERITAS

REGISTRE INTERNATIONAL DE CLASSIFICATION DE NAVIRES ET D'AÉRONEFS
INTERNATIONAL REGISTER FOR THE CLASSIFICATION OF SHIPPING AND AIRCRAFTRAPPORT DE FRANC-BORD
SURVEY FOR FREEBOARDEtabli en ..., à l'occasion de la distribution d'un certificat de franc-bord international
In view of delivery of an international freeboard certificate

- Nom du navire (Name of ship) : **"VIKING - SALLY"**
 — Port d'immatriculation (Port of registry) : **Mariohamn, Finland**
 — Nationalité (Nationality) : **Finnish**
 — Numéro ou lettres distinctifs (Distinctive number or letters) :
 — Constructeurs du navire (Ship builders) : **Jos. L. Meyer, Papenburg/Ges.**
 — Numéro du chantier (Yard number) : **S. 590**
 — Date de la construction/conversion (Date of build/conversion) : **1980**
 — Franc-bord assigné au titre d'un navire du type (Freeboard assigned as a ship of type) : **B**
 — Classification (Classification) : **I 3/3 E, INKEP SEA, Ice Class I A
(AFT) Passenger Ferry**
 — Date et lieu de la visite initiale (Date and place of initial survey) : **Papenburg/Ges.
April 1980**
-
- Numéro de registre (Register number) : **35 P 587**
 — Catégorie (Kind of ship) : **new**
 — Armateur (Owner) : **Rederi Aktiebolaget Sally, Finland**
 — Lieu de construction (Place of build) : **Papenburg, W. Germany**
 — Visite effectuée par (Survey made by) : **J. Drasenovic**

Le constructeur doit établir un plan plié au format 210 x 297 mm sur lequel doivent être indiquées les dimensions principales en tenant compte des règles de la Convention de 1966 sur les lignes de charge, ainsi que la description du type des ouvertures dans le bordé extérieur, dans les parois latérales et les cloisons d'extrémités des superstructures.

Le constructeur doit également fournir un dossier séparé pour permettre d'étudier la possibilité d'attribuer à un navire un franc-bord "A" ou "B réduit".

(The builder should draw a plan fold in the dimensions 210 x 297 mm on which should be indicated the principal dimensions taking into account the regulations of the 1966 load line Convention as well as the description of the type of the openings in the sides of the ship, in the side plating and in the end of bulkheads of the superstructures.

The builder should equally submit a separated file in order to allow considering the possibility of assigning a freeboard to "type A" ships or a reduced freeboard to "type B" ships.


Mod. Ad. M.E. 193

Page 2

Un plan aux dimensions appropriées peut être joint au présent rapport de préférence aux schémas figurant dans cette page.
(A plan of suitable size may be attached to this report in preference to sketches on this page)

Agencement et dimensions des superstructures, trunks, roulles, encallement des machines, hauteur des pavois, rambardes et bordages en bois sur le pont exposé, à insérer dans les diagrammes et tableaux qui suivent, ainsi que l'emplacement des écoutilles, passerelles et autres moyens destinés à la protection de l'équipage ; écoutilles de chargement, portes à l'avant et à l'arrière, hublots, sabords de décharge, manches à air, tuyaux de dégagement d'air, capots de descentes et autres éléments qui affecteraient la navigabilité du navire.

(Disposition and dimensions of superstructures, trunks, deckhouses, machinery casings ; extent of bulwarks, guard rails and wood sheathing on exposed deck, to be inserted in the diagrams below and tables following ; together with positions of hatchways, gangways, cargo ports, bow and stern doors, side scuttles, scuppers, ventilators, air pipes, companionways, etc., which would affect the seaworthiness of the ship).

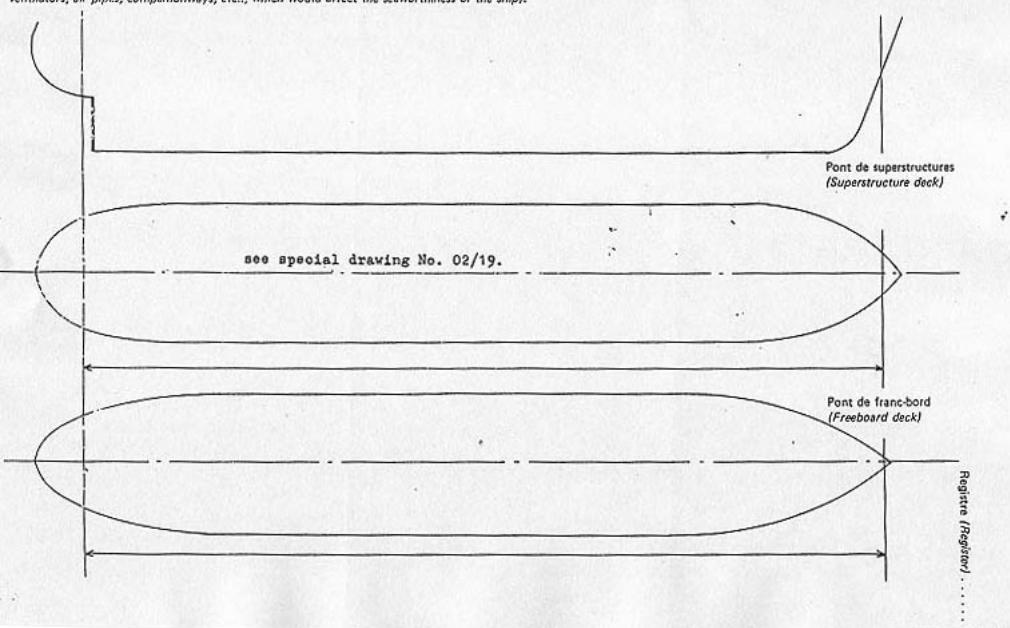

PORDES DES SUPERSTRUCTURES, ENCAISSEMENTS EXPOSÉS DES MACHINES ET RÉGLES 12, 17 ET 18
LES OUVERTURES SITUÉES SUR LES PONTS DE FRANC-BORD ET DE SUPERSTRUCTURE
(DOORWAYS IN SUPERSTRUCTURES, EXPOSED MACHINERY CASINGS AND DECKHOUSES PROTECTING
OPENINGS IN FREEBOARD AND SUPERSTRUCTURE DECKS (REGULATIONS 12, 17 and 18))

Emplacement (Location)	N° de référence sur le schéma ou le plan (Ref. No on sketch or plan)	Nombre et dimensions des ouvertures (Number and size of openings)	Hauteur des seuils (Height of sills)	Dispositifs de fermeture (closing appliances)	
				Type et matériau (Type and material)	Nombre de tournequets de serrage (number of clips)
Dans la cloison du gaillard (In forecastle bulkhead)					
Dans la cloison de château avant (In bridge forward bulkhead)	"D1" on 4th deck p. & s.	2 x (1370 x 620)	600	steel	4
Dans la cloison de château arrière (In bridge after bulkhead)					
Dans la cloison de pont surélevé (In raised quarter deck bulkhead)					
Dans la cloison de dunette (In poop bulkhead)					
Dans les encassemens exposés des machines situés sur les ponts de franc-bord ou de demi-dunette. (In exposed machinery casings on freeboard or raised quarter decks).					


Page 3

PORDES DES SUPERSTRUCTURES, ENCAISSEMENTS EXPOSÉS DES MACHINES ET RÉGLES 12, 17 ET 18
LES OUVERTURES SITUÉES SUR LES PONTS DE FRANC-BORD ET DE SUPERSTRUCTURE (Suite)
(DOORWAYS IN SUPERSTRUCTURES, EXPOSED MACHINERY CASINGS AND DECKHOUSES PROTECTING
OPENINGS IN FREEBOARD AND SUPERSTRUCTURE DECKS (Continued))

Emplacement (Location)	N° de référence sur le schéma ou le plan (Ref. No on sketch or plan)	Nombre et dimensions des ouvertures (Number and size of openings)	Hauteur des seuils (Height of sills)	Dispositifs de Fermeture (closing appliances)	
				Type et matériau (Type and material)	Nombre de tournequets de serrage (number of clips)
Sur les encassemens exposés des machines situés sur les ponts de superstructures (In exposed machinery casings on superstructure decks)					
Sur les encassemens des machines situés à l'intérieur des superstructures ou rouffes sur le pont de franc-bord. (In machinery casings within superstructures or deckhouses on freeboard deck).	D 7 on 2nd deck	1 x (1670 x 1600)	200	steel	2
Sur les rouffes situés dans un emplacement de la catégorie 1 entourant des ouvertures donnant accès sous le pont de Franc-bord. (In deckhouses in position 1 enclosing openings leading below freeboard deck).	D 2 D 6 D 8 D 9 D 10 D 11	2 x (1370 x 680) (4th deck) 2 x (1450 x 670) (2nd deck) 12 x (1830 x 800) (2nd deck) 3 x (1700 x 2600) (2nd deck) 3 x (1250 x 2150) (2nd deck) 2 x (14250 x 2150) (2nd deck)	600 600 230 - - -	steel steel pneumat. doors hydr. door lift doors lift doors	4 2 - - - -
Sur les rouffes situés dans un emplacement de la catégorie 2 entourant des ouvertures donnant accès sous le pont de franc-bord ou à l'intérieur de superstructures fermées. (In deckhouses in position 2 enclosing openings leading within enclosed superstructures or below freeboard deck).	D 3 D 4 D 5	2 x (1970 x 1350) (2nd deck) 1370 x 620 (2nd deck) 1970 x 850 (2nd deck)	- 600 -	wire steel wire	- 2 -
Sur les encassemens exposés de la chambre des pompes. (In exposed pump room casings).					

Page 4

ÉCOUTILLES SITUÉES DANS LES EMPLACEMENTS DES CATEGORIES 1 ET 2 FERMÉES PAR DES PANNEAUX MOBILES ET RENDUES ÉTANCHES AUX INTÉMÉRIES PAR DES PRÉLARTS ET DES DISPOSITIFS À TENDRE
HATCHWAYS AT POSITIONS 1 AND 2 CLOSED BY PORTABLE COVERS AND SECURED WEATHERTIGHT BY TARPAULINS AND BATTENING DEVICES (Regulation 15)

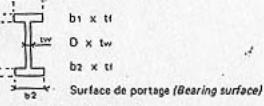Emplacement et N° de référence sur le schéma ou le plan (Position and reference No. on sketch or plan)					
Dimensions du clair de l'ouverture au sommet du surlieu (Dimensions of clear opening at top of coaming)					
Hauteur des surlieux au-dessus du pont (Height of coamings above deck)					
BARROTS MOBILES Nombre (Number) (PORTABLE BEAMS) Ecartement (Spacing)					
	b1 x t1	D x t2	b2 x t1		
Moyens d'assujettissement de chaque barrot (Means of securing each beam)					
PANNEAUX MOBILES Matériau (Material) Épaisseur (Thickness) Sens dans lequel ils sont installés (Direction fitted)					
(HATCH COVERS) Surface de portage (Bearing surface)					
Ecartement des taquets (Spacing of cleats)					
PRÉLARTS (TARPAULINS) Nombre d'épaisseurs (No. of layers) Matériau (Material)					

Moyens d'assujettissement de chaque élément transversal de panneau :
(Means of securing each section of covers) :

Les panneaux en bois sont-ils munis à leurs extrémités de bandes en acier galvanisé ?
(Are wood covers fitted with galvanized end bands?)

Page 5

ÉCOUTILLES SITUÉES DANS LES EMPLACEMENTS DES CATÉGORIES 1 ET 2 FERMÉES PAR DES PANNEAUX ÉTANCHES AUX INTÉMÉRIES, EN ACIER (OU AUTRE MATERIAU EQUIVALENT), DOTTÉS DE GARNITURES ET DE DISPOSITIFS DE SERRAGE (Règle 16)
HATCHWAYS AT POSITION 1 AND 2 CLOSED BY WEATHERTIGHT COVERS OF STEEL (OR OTHER EQUIVALENT MATERIAL) FITTED WITH GASKETS AND CLAMPING DEVICES (Regulation 16)

Emplacement et N° de référence sur le schéma ou le plan (Position and reference No. on sketch or plan)	4th deck fr. 167 A 1	2nd deck fr. 146 2x A 2	2nd deck fr. 6 2 x A3			
Dimensions du clair de l'ouverture au sommet du surlieu (Dimensions of clear opening at top of coaming)	820 x 820	1000 x 690	800 x 800			
Hauteur des surlieux au-dessus du pont (Height of coamings above deck)	800	800	600			
Type du panneau ou marque de fabrique (Type of cover or patent name)	6 bow nuts	2 clips	2 clips			

Matériau (Material)

steel

Emplacement et N° de référence sur le schéma ou le plan (Position and reference No. on sketch or plan)						
Dimensions du clair de l'ouverture au sommet du surlieu (Dimensions of clear opening at top of coaming)						
Hauteur des surlieux au-dessus du pont (Height of coamings above deck)						
Type du panneau ou marque de fabrique (Type of cover or patent name)						

Matériau (Material)

steel

Page 6

OUVERTURES SITUÉES DANS LA TRANCHE DES MACHINES ET OUVERTURES DIVERSES DANS LES PONTS DE FRANC BORD ET DE SUPERSTRUCTURES (Règles 17 et 18)
MACHINERY SPACE OPENINGS AND MISCELLANEOUS OPENINGS IN FREEBOARD AND SUPERSTRUCTURE DECKS (Regulations 17 and 18)

Emplacement et N° de référence sur le schéma ou le plan (Position and reference No on sketch or plan)	2nd dock fr. 147 CL F 1	2nd dock fr. 141 CL F 2	2nd dock fr. 66 P.S. F 3	2nd dock fr. 0 P.S. F 4	2nd dock fr. 0 St.b. F 5	
Dimensions (Dimensions)	1580x2280	1580x2280	2280x2280	3500x2300	3500x2300	
Hauteur du surbaud (Height of coaming)	flush deck					
PANNEAU ICOVER	steel	steel	steel	steel	steel	
Moyen d'attache (How attached)	by screws					
Nombre et écartement des cabillots (Number and spacing of toggles)	28 screws spacing=300	28 screws spacing=300	28 screws spacing=300	38 screws spacing=300	38 screws spacing=300	

Emplacement et N° de référence sur le schéma ou le plan (Position and reference No on sketch or plan)						
Dimensions (Dimensions)						
Hauteur du surbaud (Height of coaming)						
PANNEAU ICOVER	Matériau (Material)					
	Moyen d'attache (How attached)					
Nombre et écartement des cabillots (Number and spacing of toggles)						

Page 7

MANCHES A AIR SITUÉES SUR LES PONTS DE FRANC BORD ET DE SUPERSTRUCTURES
(EMPLACEMENTS DES CATÉGORIES 1 ET 2) (Règle 19)
VENTILATORS ON FREEBOARD AND SUPERSTRUCTURE DECKS (POSITION 1 AND 2) (Regulation 19)

Pont sur lequel elles sont installées (Deck on which fitted)	Nombre de manches à air installées (Number fitted)	Surbaud (Coaming)		Type (Préciser la marque de fabrique s'il y en a une) (Type) (state patent name if any)	Moyens de fermeture (Closing appliances)	Page 8
		Dimensions (Dimensions)	Hauteur (Height)			
4th deck V 1	6	400x200	900	Gootenock	steel cover with one bow nut	
4th deck V 2	2	Ø 810	1700	EHA-VS-SLD	Fireflap	
)	6	1200x1300	700	Jalousies	Jalousies with closing laminae	
4th deck V 3)	2	1200x800	1120	"	" " " "	
)	2	1000x1100	840	"	" " " "	
4th deck V 4	12	1000x1400	700	"	" " " "	
4th deck V 5.	2	500x600	700	"	" " " "	
2nd deck V 6	24	600x500	4950	"	Fireflap	

TUYAUX DE DÉGAGEMENT D'AIR SUIVANTES SUR LES PONTS DE FRANC BORD ET DES SUPERSTRUCTURES (Règle 20)
 AIR PIPES ON FREEBOARD AND SUPERSTRUCTURE DECKS (Regulation 20)

Pont sur lequel ils sont installés (Deck on which fitted)	Nombre de tuyaux installés (Number fitted)	Surbaus (Coaming)		Type (Préciser la marque de fabrique s'il y en a une) (Type) (State patent name if any)	Moyens de fermeture (Closing appliances)
		Dimensions (Dimensions)	Hauteur (Height)		
2nd deck	1	Ø 200x3,9	915	Air pipes	
2nd deck	16	150x4,5	915	" "	39 with opening in shell without closing appliance. acc. to drawing No. 61/1.
2nd deck	8	100x4,5	915	" "	
2nd deck	16	90x4,5	915	" "	31 with manuellt closing acc. to drawing No. 61/2
2nd deck	25	65x4,5	915	" "	
2nd deck	9	50x4,0	915	" "	
2nd deck	11	40x4,5	300	sewing pipes	screw closing
2nd deck	7	40x4,5	f1. deck	" "	screw closing
2nd deck	15	Ø 50-Ø 150 x 4; 4,5	800-950	filling- and hand cover pipes	flange closing

SABORD DE CHARBON ET AUTRES OUVERTURES ANALOGUES (Règle 21)
 CARGO PORT AND OTHER SIMILAR OPENINGS (Regulation 21)

Emplacement du sabord (position of port)	Dimensions de l'ouverture (Dimensions of opening)	Distance du can inférieur au pont de franc-bord (Distance of lower edge from freeboard deck)	Dispositifs d'assujettissement (Securing devices)	Observations (Remarks)
Bow part	1 x (5500 x 5150)	-	hydr. closing	by von Tell
Stern parts	2 x (7000x5100)	-	" " "	" " "
Fr. 123 D 12	2 x (600x1700)	200 above 2nd deck	6 toggle-bolts	-
Fr. 80 D 13	2 x (2000x1200)	500 above 2nd deck	hydr. closing	by von Tell
Fr. 1 D 14	2 x (600x1700)	200 above 2nd deck	6 toggle-bolts	-
Fr. 80a D 15	2 x (2800x2200)	100 above 4th deck	hydr. closing	by von Tell

All parts with rubber-packing and according to approved drawings.

SCUPPERS INLETS AND DISCHARGES (Regulation 22)

Préciser s'il s'agit de dalot ou de décharge (State if scupper or discharge)	Nombre (Number)	Tuyau (Pipe)			Provenant de (From)	Distance verticale au-dessus de la quiné (Vertical distance above top of keel)			Emplacement des commandes (Position of controls)		
		Diamètre (Diameter)	Épaisseur (Thickness)	Matériau (Material)		Décharge (Discharge)					
						Sortie dans la coque (outlet in hull)	Extrémité du tuyau de décharge à l'intérieur du navire (Inboard end)	Clapet situé à l'emplacement le plus élevé (Uppermost valve)			
D	1	ø 50	7,5	MS	Bilge-pump	4650	4650	4650			
D	2	ø300	17,5	MS	Main-engine	4300	4300	7000			
D	1	ø200	17,5	MS	Bilge-pump	4300	4300	4300			
D	1	ø200	17,5	MS	Aux.-engine	4590	4590	4590			
D	1	ø200	17,5	MS	Ballast-pp.	4580	4580	4580			
D	1	ø200	17,5	MS	Ball.-system	4550	4550	4550			
D	1	ø150	17,5	MS	Bilge-pump	3200	3200	3200			
D	1	ø200	17,5	MS	Sm. bilge-p.	3200	3200	3200			
D	1	ø200	17,5	MS	Bilge-pump	2500	2500	2500			
D	1	ø250	17,5	MS	Coolw. agr.	4500	4500	4500			
D	4	ø150	17,5	MS	KaMeWa-plant	3000	3000	3000			
D	2	ø100	17,5	MS	Sewage-plant	5700	2200	5700			
D	2	ø100	17,5	MS	DW-tanks	5700	5700	5700			
D	1	ø150	17,5	MS	Prov. cool. pl.	4500	4500	4500	at outlet		
S	24	ø150	12,5	MS	2nd deck	5700	2nd deck	5700	2nd deck		
S	8	ø100	11,0	MS	4th deck	5700	4th deck	5700	no valve		

S - Dalot (Scupper)
D - Décharge (Discharge)

MS - Acier doux (Mild steel)
CS - Acier mouillé (Cast steel)
GM - Bronze industriel (Gun metal)
Indiquez tout autre matériau approuvé, le cas échéant
(Any other approved material to be designated)

SD - Souape à clapet attelé (Screw down)
ANR - Clapet automatique de non retour (Automatic non-return)
SD ANR - Clapet automatique de non retour avec moyen de fermeture direct (Screw down automatic non-return)

Page 11

HUBLOTS (Règle 23)
SIDE SCUTTLES (Regulation 23)

Emplacement (Position)	Nombre de hublots installés (Number fitted)	Dimensions de la surface nette du verre (Clear glass size)	Fixe ou ouvrable (Fixed or opening)	Matériau (Material)		Type et épaisseur du verre (Type of glass and thickness)	Normes utilisées et type N° (Standards used) and type No)
				Cadre (Frame)	Contre-hublot (Dead-light)		
2nd deck	6	ø 300	fixed	steel	steel	15 mm	150 Type B
2nd deck	12	ø 300	opening	steel	steel	15 mm	150 Type B
3rd deck	14	ø 300	fixed	steel	steel	15 mm	150 Type B
3rd deck	2	ø' 300	opening	steel	steel	15 mm	150 Type B
4th deck	30	600x1500	fixed	steel	no dead-light	10 mm	150
4th deck	75	400x800	fixed	steel	no dead-light	10 mm	150
4th deck	4	400x800	opening	steel	no dead-light	10 mm	150
4th deck	4	400x800	fixed	steel	steel	10 mm	150
4th deck	4	400x800	opening	steel	steel	10 mm	150

Indiquer la distance verticale entre le pont de franc-bord et le can inférieur du hublot situé à la plus grande distance verticale au-dessous du pont de franc-bord.

(Indicate the vertical distance between the freeboard deck and the lower sill of the side scuttle positioned at the greatest vertical distance below the freeboard deck).

Page 12

SABORDS DE DÉCHARGE (Règle 24)
FREEING PORTS (Regulation 24)

	Longueur du pavois (Length of bulwark)	Hauteur du pavois (Height of bulwark)	Nombre et dimensions des sabords de décharge de chaque bord (Number and size of freeing ports each side)	Section totale de chaque bord (Total area each side)	Section requise de chaque bord (Required area each side)
Puits arrière sur le pont de franc-bord (Freeboard deck after well)					
Puits avant (Forward well)	26,4 m	1,75-2,85m	1 x (5,65 m x 0,10 m) 1 x (3,70 m x 0,10 m)	0,935 m ²	0,924 m ²
Pont de superstructures (Superstructure deck)					

Préciser l'emplacement arrière et avant de chaque sabord de décharge par rapport aux cloisons d'extrémités de superstructures

(State fore and aft position of each freeing port in relation to superstructure end bulkheads)

Détails sur les volets battants, barres ou tringles dont sont munis les sabords de décharge

(Particulars of shutters, bars or rails fitted to freeing ports)

Puits arrière (After well) —

Puits avant (Forward well) —

none

Hauteur du seuil inférieur du sabord de décharge au-dessus du pont

(Height of lower edge of freeing port above deck)

100 mm

Page 13

PROTECTION DE L'ÉQUIPAGE (Règles 25 et 26)
PROTECTION OF THE CREW (Regulations 25 and 26)

Donner des détails sur les pavois ou rambardes installés sur les ponts de franc-bord ou de superstructures :

(State particulars of bulwarks or guardrails on freeboard and superstructure decks.)

As per drawing No. 02/19

Page 14

Donner des détails sur les filières, passages, passerelles ou passages sous pont, lorsqu'ils sont prescrits :

(State details of lifelines, walkways, gangways or underdeck passageways where required to be fitted.)

—

DISPOSITIF D'ARRIMAGE DES CHARGEMENTS DE BOIS EN PONTÉE (Règle 44)
TIMBER DECK CARGO FITTINGS (Regulation 44)

Donner des détails sur les montants, sabots, saïnes, rambardes et filières :

(State particulars of uprights, sockets, lashings, guardrails and lifelines.)

AUTRES CARACTÉRISTIQUES PARTICULIÈRES
OTHER SPECIAL FEATURES

Page 15

Les conditions d'assignation figurant dans le présent recueil correspondent aux aménagements et installations prévus à bord du navire et sont conformes aux dispositions des règles pertinentes de la Convention Internationale de 1966 sur les lignes de charge.

(The conditions of assignment shown on this form are a record of the arrangements and fittings provided on the ship and are in accordance with the requirements of the relevant regulations of the International Convention on Loadlines, 1966).

A Oldenburg
(Place)
le April 23, 1900
(Date)
J. Brzozovic
(Signature)
Expert du BUREAU VERITAS
(Surveyor to BUREAU VERITAS)

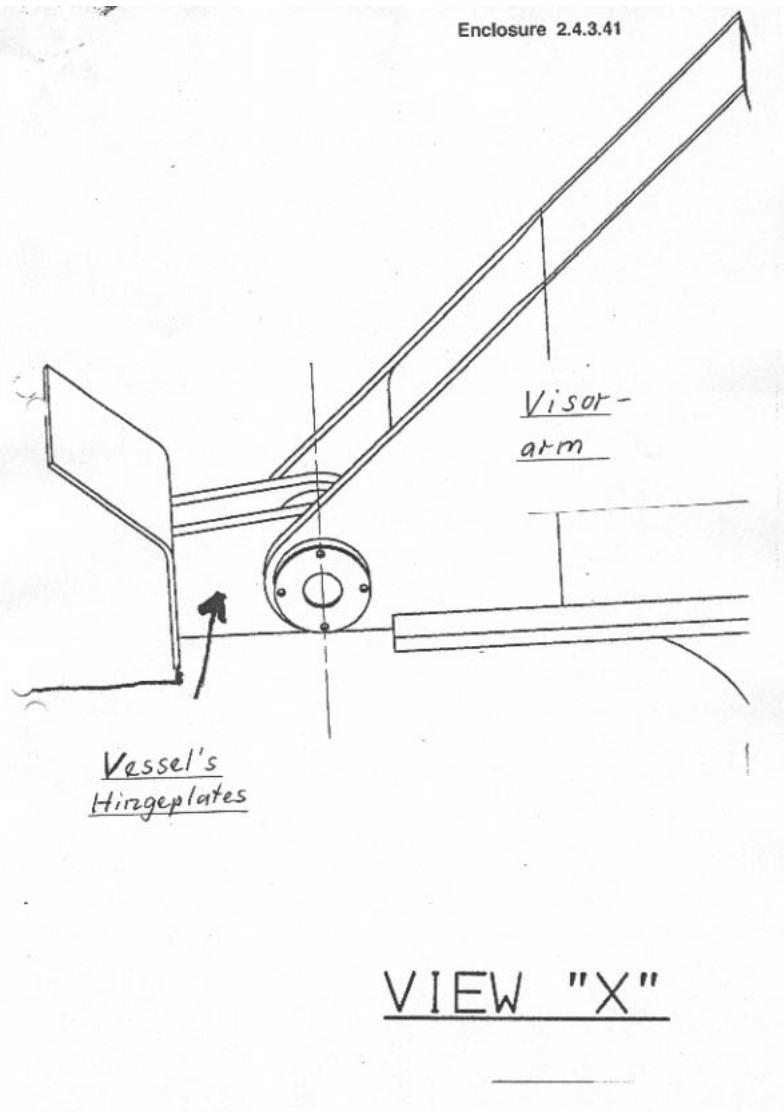





Photo showing visor hinge arrangements on viking sally



Drawings showing visor hinge arrangement



VIEW "X"

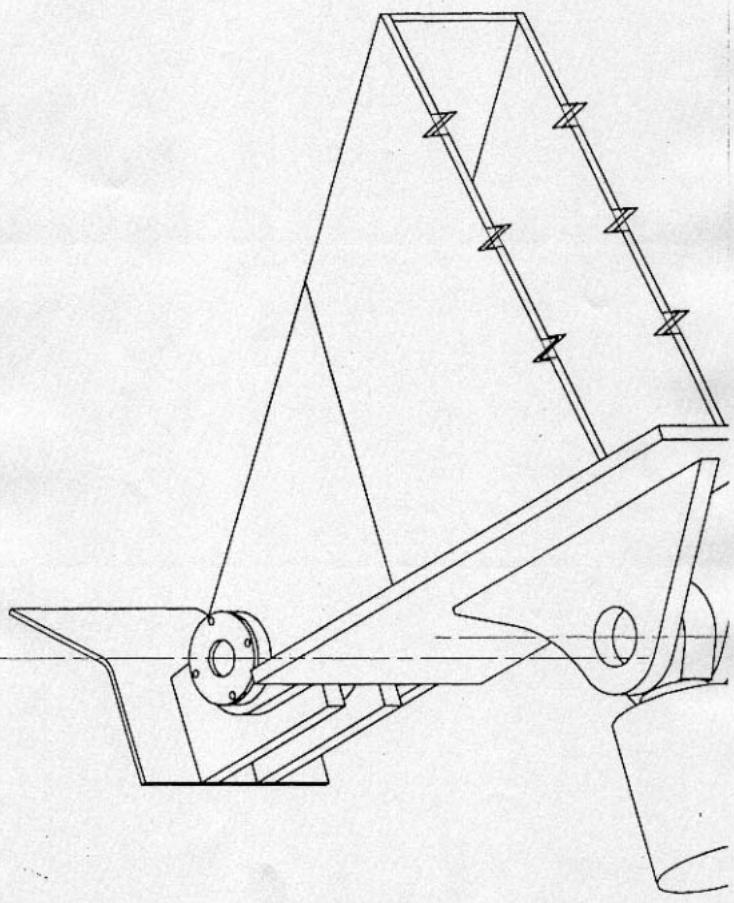

Change of drawing 1106 as to scharnierbleche/ hinge plates

SK 33-33 9xx 5x-B

Nr.	Art der Änderung	Datum	Name
3	Scharnierbleche geändert	21.80	Se
2	geprüft von Tell	22.10.79	Se

Maßstab: 1:10	Jos. L. Meyer Papenburg (Ems) Schiffswerft, Maschinenfabrik, Dockbetrieb				
Datum: 31.10.79	Bugklappenverriegelung				
Se	Gewerk:	Schiffs Nr. 590	Sektions Nr. 1106	Zeichn. Nr. 1106	Archiv Nr.

Letter meyer werft von tell gmbh

Enclosure 2.4.3.43

Von Dell GmbH
Sophienallee 24
2000 Hamburg 19

T25/Se/SK -257 09.01.1980

Ihre Kons. Nr. 4911.1/60.151.1
Mein Haubag S. 590

Sehr geehrte Herren,
anliegend erhalten Sie 2 Reusen der Zeichnung
1106 Zugklappenverriegelung.

In dieser Zeichnung ist das Zugklappenschloss in der geänderten
Form (gegenüber S. 591) dargestellt.

Bitte prüfen Sie die Zeichnung und senden Sie mir eine Fausa,
mit Ihrem Genehmigungsvermerk versehen, zurück.

Mit freundlichem Gruß
J O S. L. M E Y E R

Anlage



Letter meyer werft /BV

Bureau Veritas
Hopfenmarkt 33
2000 Hamburg 11

TBS/De/Sk -257 9.01.1980

Nein Neubau S. 590

Sehr geehrte Herren,

Anliegend erhalten Sie 4 Pausen der Zeichnung

1106 Bugklappenverriegelung.

In dieser Zeichnung ist das Bugklappenscharnier in der geänderten Form (gegenüber S 592) dargestellt.

Bitte prüfen Sie die Zeichnung und senden Sie mir eine Pause, mit Ihrem Genehmigungsvermerk versehen, zurück.

Mit freundlichem Gruß

J O S. L. M E Y E R

Anlage

Summary of BV inspections during newbuilding phase

Bureau Veritas
Marine Division

14.06.1995

SURVEYS BY BUREAU VERITAS DURING CONSTRUCTION OF M/S ESTONIA

Survey dates	Locations, subjects & items surveyed
1979 09 25	Informal meeting with Mr Zerrahn.
1979 10 04	Inspection of double bottom sections iwo gear foundations.
1979 10 09	Meeting with yard and owner in drawing office.
1979 10 10	Meeting with Mr Brück of Seebeckwerft at Bremerhaven, supplier of deck house sections.
1979 10 12	Inspections on building berth and in shops.
1979 10 24	Meeting and inspection.
1979 11 05	Inspections on building berth and in shops. Meeting with yard managers, X ray program made.
1979 11 08	Inspections and discussions at the yard.
1979 11 13	Meeting at Bremerhaven Seebeckwerft.
1979 11 14	Inspections at Bremerhaven; Messrs Rickmerswerft & Tileman.
1979 11 16	Inspections of sections at Messrs Rickmerswerft & Tileman. Inspection of double bottom tanks at the yard.
1979 11 23	Pressure test and inspection of tanks. Meeting with owners rep. & yard
1979 11 28	Inspection and pressure test of tanks.
1979 12 04	Inspection of sections at Bremerhaven - Rickmerswerft.
1979 12 05	Pressure test and inspections of tanks. Inspection of tweendeck spaces before painting and insulation.
1979 12 06	Seebeckwerft, Bremerhaven, inspections.
1979 12 11	Air test of void spaces. Inspections of db tanks and engine rooms.
1979 12 13	Inspection of tanks, cofferdams as well as pressure tests.
1979 12 14	Seebeckwerft Bremerhaven, inspections and meeting.
1979 12 17	Seebeckwerft Bremerhaven, inspection of superstructures.
1979 12 18	Meeting and inspections.
1979 12 19	Pressure test of tanks. Rickmerswerft, Bremerhaven, inspection of bulbous bow sections.
1979 12 20	Pressure test of heeling tanks (tk 14). Discussion in yard offices.
1980 01 06	Pressure test and inspections of tanks.
1980 01 08	Seebeckwerft Bremerhaven, inspection of superstructures.

Enclosure 2.4.3.44.1

SURVEYS BY BUREAU VERITAS DURING CONSTRUCTION OF M/S ESTONIA

Survey dates	Locations, subjects & items surveyed
1980 01 14	Air test of both heeling tanks. Inspection of tween deck spaces. All 4 aux. units in the aux. eng. room. First sections from Bremen have arrived in Papenburg.
1980 01 16	Pressure tests witnessed by owners representatives.
1980 01 18	Seebeckwerft & Rickmerswerft, Bremerhaven; insp. of sections. Pressure test of small tanks at old facilities.
1980 01 29	Inspection and pressure tests.
1980 01 30	Tests of small tanks - at old facilities-
1980 02 01	Inspection of tanks, spaces and tweendeck spaces.
1980 02 04	Seebeckwerft, Bremerhaven, inspection of superstructure sections.
1980 02 05	AUT meeting with MN Trousse & Lavaine.
1980 02 07	Pressure tests and inspections according to programme. Inspections and discussions with owners rep. and yard.
1980 02 08	Inspection of tanks and tweendeck spaces. Start of freeboard report survey.
1980 02 12	Inspection and pressure tests of tanks and cofferdams.
1980 02 15	Continuation of insp. and pressure tests.
1980 02 19	Inspection of both rudders and identification of materials in the workshops - at old facilities-
1980 02 21	Pressure test of tanks and inspection of several spaces.
1980 02 26	Inspection and pressure tests of tanks and void spaces. Inspection of staircases. Viewing of X ray films.
1980 02 29	Inspection and pressure tests of tanks.
1980 03 04	Inspection and supervision.
1980 03 05	Seebeckwerft, Bremerhaven, inspections and supervisions with owner and yard.
1980 03 06	Inspections of tanks, cofferdams and staircases
1980 03 11	Inspection of cofferdam iwo: swimming pool; prov. stores and steering gear compartment. Check of fire protection insulation.

Page 2

SURVEYS BY BUREAU VERITAS DURING CONSTRUCTION OF M/S ESTONIA

Survey dates	Locations, subjects & items surveyed
1980 03 14	Pressure tests of tanks. Inspection of shell plating. Pressure tests of starting air lines and hydraulic lines.
1980 03 18	Pressure tests of cofferdams and inspection of bulkhead on frame 133. check of shaft struts.
1980 03 28	Internal inspection of fresh water tanks. Check of bow ramp connections. Check of armatures for the Sanea pump units.
1980 03 31	Inspection of section butts of the upper superstructures. Check of fwd draught marks. Discussion about Superfos hydraulic control room and inspection of Sanea pump units.
1980 04 01	Completion of recording for inspection on 25 March 1980. Checks of rudder main pieces and pintles with nuts and bearings. Freeboard record with drawings examined.
1980 04 02	Inspection of trim tank N° 2 WB and starboard side "C" deck. Recommendations made.
1980 04 09	Fitting of pintle bushes in both skegs verified. Checking of PS rudder main piece. Pressure test of freshwater tanks N° 56 & 57. Checking of bow thruster motor foundation forward. Checking of X ray films.
1980 04 11	Pressure tests of sea chests and void spaces. Inspection of fresh water tanks N° 56 & 57
1980 04 15	Fitting of shaft bushes checked. Draught marks aft examined.
1980 04 17	Fitting of propeller shaft stbd witnessed. Surveys for freeboard report.
1980 04 18	Fitting of shaft bushes.
1980 04 21	Fitting of propellershaft ps witnessed. Meetings with Messrs Zerrahn & Watermann.
1980 04 22	Check of fitting of starboard side rudder. Inspection of insulation. Bottom inspection.

Page 3

SURVEYS BY BUREAU VERITAS DURING CONSTRUCTION OF M/S ESTONIA

Survey dates	Locations, subjects & items surveyed
1980 04 23	Surveys for freeboard report.
1980 04 24	Check of fitting of port side rudder. General hull survey. Discussion with Mr Zerrahn about Sanea plant inspections. Air test of fore peak.
1980 05 05	Surveys in the car deck area "C" deck.
1980 05 09	Informal visit with Mr Arpe. Visit of Sanea plant parts.
1980 05 12	Air test of stern tank. Pressure tests of piping systems. Check of car deck insulation. Pressure test of Sanea boiler.
1980 05 14	General survey. Pressure test sprinkler system Inspection of Sanea thermal oil boiler plants.
1980 05 16	Pressure test of two Sanea collectors. Informal visit with Mr Kranz.
1980 05 21	Check of alignment of both shaft lines up to gears. Inspections in engine room.
1980 05 22	Surveys and meetings in different offices.
1980 05 27	Continuation of meetings 22 May 1980.
1980 05 28	Load test of car deck sections. Surveys and meetings. Discussion about insulation of thermal oil piping systems with Mr Bless.
1980 05 29	Load tests of car deck sections, insulation as before discussed.
1980 05 30	Load tests of car deck sections.
1980 06 02	Alignment of both main engines checked. Pressure test of thermal oil boilers (th. oil side).
1980 06 03	Different surveys. Meeting with Mr Breitschneider Siemens about load tests.
1980 06 04	Different surveys. Meeting with Mr Zerrahn. Pressure tests of thermal oil lines.
1980 06 05	Check of insulation below "C" deck. Further check of alignment of MBS. Check of water tight doors. Electrical load tests.
1980 06 06	Inspection of double bottom tanks for check of bottom plating after launching. Pressure test of steam lines in forward air cond. rooms. Air test of thermal oil lines. Load tests with all four auxiliary engine

Page 4

SURVEYS BY BUREAU VERITAS DURING CONSTRUCTION OF M/S ESTONIA

Survey dates	Locations, subjects & items surveyed
1980 06 09	Discussion about freeboard marks.
1980 06 10	Pressure test of CO2 lines. Check of free board marks.
1980 06 11	Inspection of side and centre houses on cardeck. Loads tests of boats and davits. Test of quick closing valves. Tel. conv. with Mr Lavaine about trials.
1980 06 12	Pressure test of CO2 lines. Boat and davit tests. Test of bilge lines and pumps.
1980 06 13	Test of bilge systems. Boat and davit tests. Load test of port side forward crane.
1980 06 14	Load test of starboard side forward car ramp.
1980 06 15	Load test of portside forward car ramp.
1980 06 18	Load test of car deck sections. Boat and davit tests. Load test of port side aft crane. Pressure test of different pipings.
1980 06 19	Load tests of boats and davits. Load tests of crane rails in ER. Load test of starboard side aft car ramp.
1980 06 20	Load test of crane rails. Test of emergency Diesel unit. Boat tests. Hose test of port side stern door.
1980 06 21	Inclining experiment with Mr Engelmann of FSS. Pressure test of starting air lines. Load tests of container lifts.
1980 06 23	Hose and function tests of passenger shell doors on C and D decks, port and starboard sides.
1980 06 25	Trip from Papenburg to Leer. Tests of watertight doors. Start of tests.
1980 06 26	Continuation of sea trials with tightness tests. Check of bow visor. Check of alarms.
1980 06 27	Start manoeuvres of main engines. Function tests of watertight doors from bridge console. Test of quick closing systems from car deck.
1980 06 28	Sea trials.

Page 5

SURVEYS BY BUREAU VERITAS DURING CONSTRUCTION OF M/S ESTONIA

Survey dates	Locations, subjects & items surveyed
1980 06 29	Sea trials and arrival at Emden.
1980 06 30	Checks of main engines before departure from Emden for Mariehamn through Kiel canal. Tests according to trial programme.
1980 07 01	Tests according to trial programme. until
1980 07 07	ditto
1980 07 30	Several AUT checks and tests during voyages between Finland and Sweden.
1980 08 02	AUT trials not completed.
1980 11-12	Several AUT trials after completion of remaining work on voyages between Stockholm and Turku. AUT Certificate handed over.

Page 6



Confidential memo concerning meeting with LO Ålander

Enclosure 2.4.3.44.2

**The German Group of Experts
investigating the sinking of M/V "ESTONIA"**
c/o AHLERS & VOGEL · Schaarlor 1 D-20459 Hamburg · Telephone 49-40-371075

Confidential Memo

cc : Dr. Holtappels
T. Wilkendorf

Meeting with principal surveyor of B.V. Stockholm office,
Lars Olof Ålander on 19th June 1995

1. BV Organisation in Sweden/Finland up to 1990

Head office for Sweden was and is Gothenburg.
Manager: Hans Olsson
Stockholm and Trelleborg/Malmö report to Gothenburg,
Gothenburg reports to Paris.
B.V.'s office for Finland was and is in Helsinki (plays no part
in the "ESTONIA" matter),
as of 1990 - Head office for the northern countries established in
Copenhagen
as of 1995 - B.V. office in Tallinn.

2. Reporting procedure

- Hull
 - Machinery
 - Automatic systems (AUT)
- The system consists of surveys totalling 1500 items over a period
of 5 years, i.e. 300 items every year.

3. Load Line Survey (annually)

Was executed for F.B.N. resp. Sjöfartsverket and consisted of survey resp. determining condition of car deck doors, staircases, scuppers, valves, etc. visor/bow ramp and stern ramps as well as the locking devices and rubber seals of same.

(The locking devices are not part of the Load Line Survey, although they should be).

The B.V. Report Form did not include the visor at that time because it was considered to be more of a breakwater.

It was clear to everyone that the bow ramp on all older ferries would not fulfil the SOLAS Regulation 10 requirement as upper extension of the collision bulkhead. However, it was not and is not the field surveyor's business to criticise this construction characteristic - evidently approved by the head office. The rubber sealings - also of the visor - are part of the L.L. Surveys. As the final item of an L.L. Inspection, the closed and locked visor should be hose tested.

4. Role of the F.B.N. and Sjöfartsverket Ship Safety Inspectors

- Examine all certificates
- Inspect social rooms / cabins / passenger accommodations
- Inspect life-saving and fire-fighting equipment
- Inspect navigation instruments
- Issue (PC) Passenger Ship Safety Certificate (annually), and thereby confirming that the vessel meets SOLAS requirements, although this is not the case.

5. The upper extension of the collision bulkhead above freeboard deck

- After the "ESTRONIA" catastrophe the seasafety director of Sjöfartsverket, Bengt-Erik Stenmark, ordered an investigation within Sjöfartsverket to find out how many ferries on the Baltic did not meet the SOLAS Regulation 10 requirement for the upper extension of the collision bulkhead. There were a

total of 40 vessels. The list with the names of these vessels is kept confidential within Sjöfartsverket, however, reportedly a copy was sent by fax to the Finnish Commission in Helsinki.

- Upon searching for an explanation for the above-mentioned it was discovered that apparently the bow ramp had been approved for the first time by a National Maritime Administration as the upper extension of the collision bulkhead for the ferries "PRINS BERTIL" and "PRINSESSAN CHRISTINA", built in Aarhus in 1960/61 - although the position of the upper extension of the collision bulkhead above bulkhead deck was already determined by SOLAS 1948 (probably with the restriction of no further than 20 sm away from the nearest land).
- In the course of the following years the National Maritime Administration of the countries surrounding the Baltic developed a practice by which this deviation from SOLAS Regulation 10 was accepted even on larger ferries, i.e. the far too short distance between the bow ramp as upper extension of the collision bulkhead and the forward perpendicular, of course mainly in compliance with owners' request.

6. **"VIKING SALLY" - "WASA KING"**

- Chief engineer Lars Karlsson was onboard from time of commissioning until the sale of the vessel and is the person best acquainted with this ship (now onboard "BIRKA PRINCESS").
- On repeated occasions the visor was closed with locking devices already in closed position. This led to damages of the lugs and bolts (also on "DIANA II").
Visor and ramp always belong to the Chief Mate's duties on Swedish/Finnish ferries (on "ESTONIA" it was the boatswain's duty).
- He supervised the "VIKING SALLY" in Stockholm and took care of the normal survey items. She sometimes called at the yard Finnbody, Stockholm and sometimes at the Naantali or Turku yards. In latter case he left the surveys up to the BV Helsinki office.

He was not part of the building supervision (that belonged to Lohmann and Axe).

- When the ship came to Stockholm for the first time the Passenger Ship Safety Certificate (Interim) was issued by the F.B.N.
- He was onboard the "WASA KING" for the last time in 1992 to do a boiler survey. At this time a Nordström & Thulin captain was already onboard as a trainee because N&T did not have personnel with ferry experience.
- He knows that the sensors of the Atlantic lock had been changed several times. Also Anders Wirstam knows this. However, B.V. Paris had instructed them not to talk about it.

If the class symbol would have contained the unrestricted AUT the sensors would be a class item. "VIKING SALLY" however only had a restricted (AUT), therefore it is not clear. Under no circumstances are the sensors a matter for the F.B.N.

The class should have inspected the sensors, however this was never done in practice.

- All electrical systems were subjected to annual megger testing, therefore also the sensors of the bow visor locking devices.
- In his opinion the correct functioning of the sensors / control lamps are a pre-condition for the seaworthiness of the vessel.
- In his opinion the manual locking devices of the bow visor are "heavy weather securings", which have to be engaged in case heavy weather should be forecasted. Locking devices are a class item and not the responsibility of the F.B.N.
- The officers were not allowed to do any manoeuvres without the approval of the master on the "ESTONIA", especially no engine manoeuvres. Up to now, i.e. including the "MARE BALTICUM", they had not learned how to handle 2 x 12000 hp.
- From talks with Anders Wirstam he knows as well that from the time of taking over no further maintenance of the vessel had been carried out. They only painted for "the eye".

- At the time of the casualty the vessel did not have a valid stability manual (was completed only in April 1995).
- Due to the "Continuous Survey of Hull and Machinery" procedure - 58 tanks were to be inspected among others - Anders Wirstam was on board on the following days in addition to the taking over: 31.01.94; 17.03.94; 06.04.94; 11.05.94; 30.08.94; 21.09.94.
- One day before the disaster occurred Anders Wirstam went on his honeymoon. The first he heard upon arrival was about the sinking. He returned immediately and was afterwards 3 months in psychiatric treatment.
- During a meeting at Bureau Veritas head office in Paris Anders Wirstam and Hans Olsson expressed their opinion that the vessel had been too large and too complicated for the inexperienced crew.
- He has collected 20.000 negatives in the course of his job-life which he will now check for photographs of "VIKING SALLY".
- He was asked by the claims manager Sverker Jonasson of Trygg Hansa - the leading hull underwriter of "ESTONIA" - if there would be reasons to justify that the insurance amount of USD 60 million should not or not yet be paid, because he was pressed by Bergmann from N&T for payment already since shortly after the sinking. His reply was NO because the ship had clean certificates. Based on his knowledge of today, however, his reply would have been to the contrary.
- In his view "ESTONIA" departed from Tallinn on her last voyage with "suspended class" because she had problems to close the visor correctly. (When Lars Olof Ålander stated this, he still did not know our points). He has based his above conclusion on the statement of pilot Gerhard Stenhammar, who had observed - a few weeks before the catastrophe occurred - that only after about 15 minutes of opening and closing the visor - combined with hard shocks of visor and the entire foreship - the crew was able to close the visor. According to his view and the interpretation of the pilot this indicates that the visor must have been completely "out of geometry".

- After we had submitted the results of our investigation he was shocked in his capacity as representative of the class. He stressed that the following points - each separately – did affect respectively have affected the class:
 - condition of the stempost
 - condition of the rubber packings
 - cracks in the visor hinges
 - poor repairs of the foundation of the port actuator of the visor
 - severe old damage at forward part and port side of the visor's shell plating
 - missing sensors at the Atlantic lock
 - missing/weak weldings at the lugs/bushings of the Atlantic lock
 - a not properly operated securing bolt of the bow ramp and consequently missing indicator lights on the bridge
 - changes of the visor lug of the Atlantic lock

All these points should have been presented to the class. The repairs of the cracked lugs at the port cylinder on B-deck should have been carried out by a skilled shore company under the supervision of the class.

7. "ESTONIA"

- Upon instructions of Hans Olsson - chief executive Gothenburg office - Anders Wirstam exclusively looked after the "ESTONIA" in respect of her class and the safety matters for the Estonian Board of Navigation. This was also the case when the vessel had been in the shipyard at Turku. Wirstam reported directly to Hans Olsson, i.e. without using the official channel, viz. Lars Olof Ålander.
- He knew about the contract between Bureau Veritas/Estonian Board of Navigation, but the contents are strictly confidential.
- During taking over the "ESTONIA" in January 1993 Hans Olsson, Anders Wirstam and one borrowed Sjöfartsverket inspector were present. The ship was checked and found to be in order. However, he was excluded from all activities concerning the taking over of the "ESTONIA". The reason could

have been his aversion against Ulf Hobro, the technical Inspector of Nordström & Thullin in charge of the "ESTONIA".

- Already from the beginning it was known that the Estonian crew was very inexperienced and that Nordström & Thullin had to use a lot of Swedish advisers on board. Hans Olsson and Anders Wirstam as well as the surveyor for the hull and P&I underwriters accepted the crew more or less, at least no one raised any objections.
- He knows from talks with Anders Wirstam that he and Hans Olsson had spent a lot of thoughts on the total incompetence of the crew, especially of the navigators (2nd and 4th Officer were playing pinball machine on the bridge, 1st Officer was so immovable that he was not able to put on/take off a T-shirt without help).

8. Other Information

- The surviving passenger Pierre Thiger reported that he has been at the bar with his colleagues, when - at 23.47 hours (Swedish time) i.e. 00.47 hours Estonian and board time - the vessel was shaking seriously and "a sharp metallic bang" was heard. About 60 seconds later the same occurred again. After the 2nd shock the vessel fell into a wave trough and came up again, then heavy rolling started which finally ended with a starboard list. The passenger could not decide to go over board with the others and stayed on the port boat deck (more forward than amidships) as long as possible. He was probably one of the last to leave the ship. At this time the vessel was totally on her starboard side and seriously trimmed by the stern which, he believes, was already aground whilst the foreship was still afloat. This is possible due to the length of the ship and the water depth.

- On 05.06.95 in the morning broadcast of Radio 1 (presenter: Helena Groll; reporters: Erik Ridderstolpe and Lars Greipe) it was reported that the chairman of the Masters and Ship Officers Association, Christer Lindvall, had stated that the indications that the "ESTONIA" had left Tallinn in unseaworthy condition were becoming stronger. Cracks in the collision bulkhead below car deck and bow thruster room were mentioned.
- The key persons knowing everything about the condition of the "ESTONIA" are Anders Wirstam, the surveyor of Bureau Veritas and Åke Sjöblom, chief inspector of Sjöfartsverket's Malmö office, who had been temporarily lent to the Estonian Board of Navigation and trained apprentices. The training took place on board the "ESTONIA" until shortly before her last departure. Since the casualty occurred Sjöblom has been pressed by his superiors and the public to make a report. Up to now he has refused this with the argument that he worked for the Estonians. He is becoming more and more a drinker and also during the day shall not sober up anymore.

20.06.95 - Werner Hummel

BV class certificate hull

St. J. 2-30

H. Helmers

h. Rothe

h. Grothe

h. Bon

h. E.

Enclosure 2.4.4.47

1) Anweisung für Rettungsgerätschaften

Vorlage für 5.82 Seite 35 von d. SOZL

2) b. Person gibt zusammen Abschreibe

(m) ab 1900 - Empfehlungen zur Erfüllung
von Seite 34 (Kapitel III) auf alle
Leute hinzuweisen3) Lieferung f. Ware im Bereich der
Städer.4) Bitte es Vorschriften für glasfaser
im Bereich der Boote? Kommt Meldung
für Wasserdurchlässen 1800 für 3 mal
Kontrolle Wohl.5) Erforderliche Einrichtungen für
Wasserdruck.7) Welche Abnahmen während der Raum-
zeit von B.N. gefordert werden wird auf
gegeben8) Welche Richtungen einzuhalten oder
mindestens Kommt Zeit9) C-Basis vorne + 150 Rep. u. ~~umfasst~~
+ 308 " " " Deck
358 1.0010) Mindeste Rettungswürze ausreichend
sein für 2628 Personen pro 1
1800 Minuten

Treppe Minuten 2 Sek. fahren

Topisch Wahns)

Info bulletin 10/78 by FBN



MERENKULKUHALLITUksen

Enclosure 2.4.4.48

TIEDOTUSLEHTI

23.10.1978

Helsinki

No 10/78

APPLICATIONS FOR APPROVAL FOR INDIVIDUAL VESSELS
This information bulletin lists the data that shall be included when submitting to the
Board of Navigation applications for approval concerning individual vessels.

Contents

1. Data to be included in the application	1
2. Accommodation of crew	2
3. Bridge	2
4. Magnetic compasses	3
5. Navigating lights	3
6. Life-saving equipment	3
7. Fire protection	4
8. Stability	5
9. Carriage of grain	6
10. Load line certificates	6
11. Tonnage certificates	6

1. DATA TO BE INCLUDED IN THE APPLICATION

The applications for approval shall be addressed to the Board of Navigation - not to a named person - and shall include the following data:

- a) Name and address of applicant, and addressee of the resolution (if not the applicant himself).
- b) Name of reference person for possible consultation.
- c) The character of the application (i.e. what the approval would concern) shall be expressed in the heading.
- d) In the text part the character of the application shall be specified.
- e) If the application is in any way special or exceptional, this has to be mentioned.
- f) All appendices and the number of them have to be mentioned, and, if necessary for clarity, also in what way they pertain to the application.
- g) The application shall include the names of appliances for which the approval of the Board of Navigation is required and if the said appliance has not earlier been approved of by the Board of Navigation, test certificates and other documents on the basis of which approval can be granted

- shall be attached.
- h) Applications shall not be made for equipment not expressly mentioned in this information bulletin.
 - i) If a ship has been in correspondence with the Board of Navigation it has been given a code, which should be mentioned in the application.
 - j) Other data to be included in the application will be specified in the following.

The applications shall be sent under the address:

Board of Navigation
P.O. Box 158
00141 HELSINKI 14

2. ACCOMMODATION OF CREW

The following drawings of crew accommodation spaces shall be provided:

- General arrangement, showing also the deepest loadline
- Detailed drawing of accommodation spaces (on the scale 1:50, 1:25 or 1:20)
- Ventilation
- Heating
- Lighting

The general arrangement of the vessel shall be provided in one copy, other drawings in triplicate.

Several arrangements may be shown in the same drawing if this can be done without causing confusion.

The drawings and data provided shall provide information of the location of accommodation and other spaces, of the free height, the total and free floor space, breadth and area of free rectangular floor space, dimensions of berths and wardrobes and number and volume of drawers for each person. The furnishing of accommodation, eating and other living spaces shall also appear from the drawings. The scale used shall be indicated in the drawings.

The manning plan shall be attached to the drawings.

The Decree No. 518/76 (given on June 16, 1976) provides for the accommodation standards for crews. In the cases mentioned in Article 39 ("old vessels") of this Decree the old Accommodation Decree (Decree on the Accommodation of Seamen in Ships, No. 794/48, given on November 20, 1948) may be applied.

3. BRIDGE

A general arrangement of the bridge shall be provided in duplicate and it shall show the location of the manoeuvring and navigation equipment and other devices.

4. MAGNETIC COMPASSES

The positioning drawings of the magnetic compasses shall be provided in duplicate along with a specification of building materials and electrical appliances and cables located near to the compasses.

5. NAVIGATING LIGHTS

Positioning drawings of the navigating lights showing that the navigating lights and other lights (towing lights, manoeuvring lights a.s.o.) are placed so as to comply with the International Convention on the International Regulations for Preventing Collisions at Sea, 1972, shall be provided in duplicate.

6. LIFE-SAVING EQUIPMENT

The following drawings shall be provided in duplicate:

6.1 Passenger ships

- general arrangement
- lifeboats and liferafts (name, number, volume, location)
- other life-saving equipment, location
- drawings showing the assembling spaces needed for use of the life-saving appliances
- spaces intended for the passengers (scale 1:50, 1:25, 1:20) for determining the number of passengers
- drawing showing exits and their marking
- general arrangement of alarm system
- other elucidating drawings and explanations

6.2 Cargo vessels falling under the Safety Convention

- general arrangement
- lifeboats and liferafts (name, number, volume, location)
- other life-saving appliances, location
- exits and their marking
- general arrangement of alarm system
- body plan of ships, in which one or several lifeboats are not situated in the midship section
- other elucidating drawings and explanations

6.3 Vessels not falling under the Safety Convention

- general arrangement
- lifeboats and liferafts (name, number, volume, location)
- exits and their marking
- general arrangement of alarm system
- other life-saving appliances, location
- other elucidating drawings and explanations

7. FIRE PROTECTION

The following information on the fire-fighting system on board shall be provided:

- general arrangement showing the main dimensions of the ship (LOA, B, T, D, H, F_B), the volumes of the biggest spaces (engine room, cargo holds, car deck), and the names of the spaces
- method of protection
- main vertical and horizontal zones
- presentation of construction and fire classes of divisions which are

- fire-classified (decks, bulkheads, doors)
- construction of openings in fire-classified divisions
- means of escape (exits, emergency exits)
- ventilation arrangements (ducts, fans, closing arrangements, stopping arrangements, through-runs)
- fire detection systems, fire alarm systems and explosive gas detection systems (names, location, functional description, main and emergency sources of power)
- presentation of remote control of closing devices of ventilation fans and ducts, fire-doors, fuel valves and other similar devices
- fire piping diagram showing fire hydrants, pipe bores and materials, closing devices, and location, pressure, and capacity of pumps, as well as fire hoses (name, length) and nozzles (name)
- fixed extinguishing systems: arrangement drawing, functional description, alarm devices, operating instructions, maintenance instructions
- portable and transportable fire extinguishers: name, size, fire class, location, also spare charges
- fireman's outfit (names, locations)
- fire control plan (text in Finnish, Swedish and English)

In the fire control plan, markings according to the standard TES 8091 shall be used.

Drawings and descriptions shall be provided in duplicate except for the fire control plan, which shall be provided in triplicate.

8. STABILITY

The following information shall be submitted in duplicate.

8.1 Ship, at least 24 Metres in Length

- a) lines plan
- b) general arrangement
- c) capacity plan, or information on the weight and coordinates of centre of gravity for light ship and volumes and centres of gravity for holds and tanks
- d) hydrostatic curves or tables
- e) cross curves or M_S curves or corresponding tables
- f) flooding angle as function of the draught
- g) moment of ice as a function of the draught
- h) corrections to G_M for the effect of free liquid surfaces in tanks
- i) K_M as function of draught, and of trim if the figures essentially change with the trim, as diagrams or tables
- j) inclining test report
- k) G_Z curves and calculations for the in § 5 of stability provisions for ships, 1972, mentioned loading conditions
- l) minimum G_M curves or tables as function of draught, and of trim if the figures essentially change with the trim, with and without taking into account the possibility of icing.

8.2 Ship, at least 24 but not more than 70 Metre; in Length

In addition to the in 8.1 above mentioned information, the following:

- a) maximum rolling period curves or tables as function of draught, with

9.2 Regulation 12 of Chapter VI of SOLAS-60

When applying for a grain certificate with observance of regulation 12 of Chapter VI of SOLAS-60 Convention the following information shall be submitted to the Board of Navigation:

- a) The information according to paragraph 9.1 as applicable
- b) Information in accordance with the IMCO Resolution A.49 (III).

9.3 IMCO Grain Rules or SOLAS-74 Chapter VI

When applying for a grain certificate with observance of the IMCO Grain Rules, the following information shall be submitted to the Board of Navigation (SOLAS-74 Chapter VI Regulation 11):

- 1) curves or tables of grain heeling moments for every compartment, filled or partly filled, or combination thereof, including the effect of temporary fittings
- 2) tables of maximum permissible heeling moments or other information sufficient to allow the master to demonstrate compliance with the requirements of Regulation 4 (c)
- 3) details of the scantlings of any temporary fittings and where applicable the provisions necessary to meet the requirements of Section I(E) of Part C
- 4) typical loaded service departure and arrival conditions and where necessary, intermediate worst service condition
- 5) a worked example for the guidance of the master
- 6) loading instructions in the form of notes summarizing the requirements of this Chapter
- 7) ship's particulars
- 8) lightship displacement and the vertical distance from the intersection of the moulded base line and midship section to the centre of gravity (KG)
- 9) table of free surface corrections
- 10) capacities and centres of gravity

10. LOAD LINE CERTIFICATES

- a) Documents: "International Load Line Certificate (1966)", "International
- b) Load Line Exemption Certificate (1966)"

The load line certificates are issued by the Board of Navigation on receipt of a provisional certificate from the classification society, together with the calculations on which the data of the certificate are based.

- c) For a ship not classified the data listed under item 10.1 c) shall, as far as possible, be sent to the Board of Navigation, in addition to those normally sent by the hull surveyor to be inspected at the Board.

11. TONNAGE CERTIFICATES

11.1 The Convention of 1947 for a Uniform System of Tonnage Measurement of Ships

- a) Documents: Tonnage certificates 1, 1 A, 1 B, and the "Special Tonnage Certificate".
- b) The tonnage certificate is issued when the ship has been measured and the measurement forms filled in by a ship admeasurer, and these

- forms have been approved at the Board of Navigation.
- c) The following data^{*} shall be appended to the measurement forms which are sent to the Board of Navigation:
- 1) capacity plan
 - 2) general arrangement
 - 3) midship section
 - 4) description of frames
 - 5) steel structure drawing, profile and plan, drawings presenting the forepeak and afterpeak, the floor plates in the engine room, and that part of the ship which is fitted with a double bottom
 - 6) body plan (possibly lines drawing)
 - 7) laying-out tables, deck, tank top, waterlines, verticals and possible diagonals
 - 8) accommodation plan
 - 9) engine room arrangement
 - 10) plans showing details of the conditions upon which the deduction of water ballast spaces is claimed:
 - a. piping arrangement: bilge, ballast, fresh water, and fuel oil
 - b. pumping installations
 - c. manholes to water-ballast spaces outside the double bottom.
 - 11) plans showing details of the conditions upon which the exemption of certain spaces is claimed, for instance drawings of the second deck (openings and closing arrangements).

11.2 The Constantinople Tonnage Measurement Regulations of 1873

- a) Documents: The tonnage certificate "Suez Canal Special Tonnage Certificate"
- b) The certificate is issued when the ship has been measured and a measurement form filled in by the tonnage surveyor, and approved by the Board of Navigation.
- c) The data listed under item 11.1 c) shall be appended to the measurement documents which are sent to the Board of Navigation, if such data have not been delivered in connection with earlier measurements.

11.3 The Tonnage Measurement Regulations of the Panama Canal Authorities

- a) Documents: The tonnage certificate "Panama Canal Tonnage Certificate"
- b) As under item 11.2 b)
- c) As under item 11.2 c)

11.4 The Decree No. 306/1955 on the Tonnage Measurement of Ships

- a) Documents: The tonnage certificate "Tonnage Document of a Foreign Ship". The certificate is issued after necessary measurements by a ship admeasurer to certain foreign ships calling at Finnish ports. Further information concerning the issue of this certificate is to be

* In view of the transition to the new tonnage measurement system (TM 69) it is advisable at this stage to determine the moulded volume in cubic metres below the uppermost complete deck of the ship.

found in the Board of Navigation information bulletin No. 5/78 (dated June 20, 1978).

— — — —
This information bulletin shall supersede bulletin No. 3/69 (dated March 13, 1969), "Drawings to be submitted to the Board of Navigation".


Head of Maritime Division
Counsellor of Navigation Oso Silonen

Mechanical Engineer Pertti Haatainen

KD 3841/78/301



Fire protection plan 1

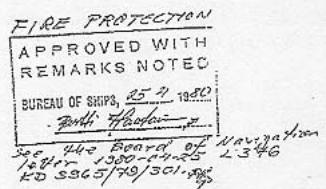

11. 10. 1979

1	Art der Änderung	Datum	Name		
2	Jos. L. Meyer-Pullenburg (Ems)				
3	Schiffswert, Maschinenraum, Dachbetrieb				
4	Datum	FIRE PROTECTION PLAN I			
5	11.10.78	1901-175/3			
6	Geburk	Schiffs Nr.	Sektions Nr.	Zeichn. Nr.	Archiv-Nr.
7		590		0218	G.1